



Specification For Approval

Customer : _____
Description : _____ EC FAN _____
Customer Part No. : _____ Rev : _____
Delta Model No. : _____ GTB040PUD26R N1 _____ Rev : 04
Safety Model No. : _____ GTB040PUD26 _____
Sample Issue No. : _____
Sample Issue Date : _____ 10/15/2018 _____

Please send one copy of this specification back after you signed approval for production pre-arrangement

Approved by : _____

Date : _____

Delta Electronics, Inc.

No.252, Shangying Road, Guishan Industrial Zone,

Taoyuan City, 33341, Taiwan

TEL : +886-3-359-1968

FAX : +886-3-359-1991

*** SAMPLE HISTORY ***

CUSTOMER :

CUSTOMER P/N :

DELTA MODEL : GTB040PUD26R N1

REV	DESCRIPTION	DRAWN	CHECKED		APPROVED	ISSUE DATE
			ME	EE		
X03	ISSUE SPEC.	邱澣美 05/24'17	邱澣美 05/24'17	林科亦 05/24'17	顏承偉 05/24'17	05/24'17
04	Modify label from TP to EP.	鍾明翰 10/15'18	鍾明翰 10/15'18	林科亦 10/15'18	顏承偉 10/15'18	10/15'18

Electronically Commutated (EC) Fan

Centrifugal Fan

φ 404 x 257 mm



Delta Electronics, Inc.
 No.252, Shangying Road, Guishan
 Industrial Zone, Taoyuan City, 33341,
 Taiwan
 TEL: +886-3-359-1968
 FAX: +886-3-359-1991
www.deltaww.com



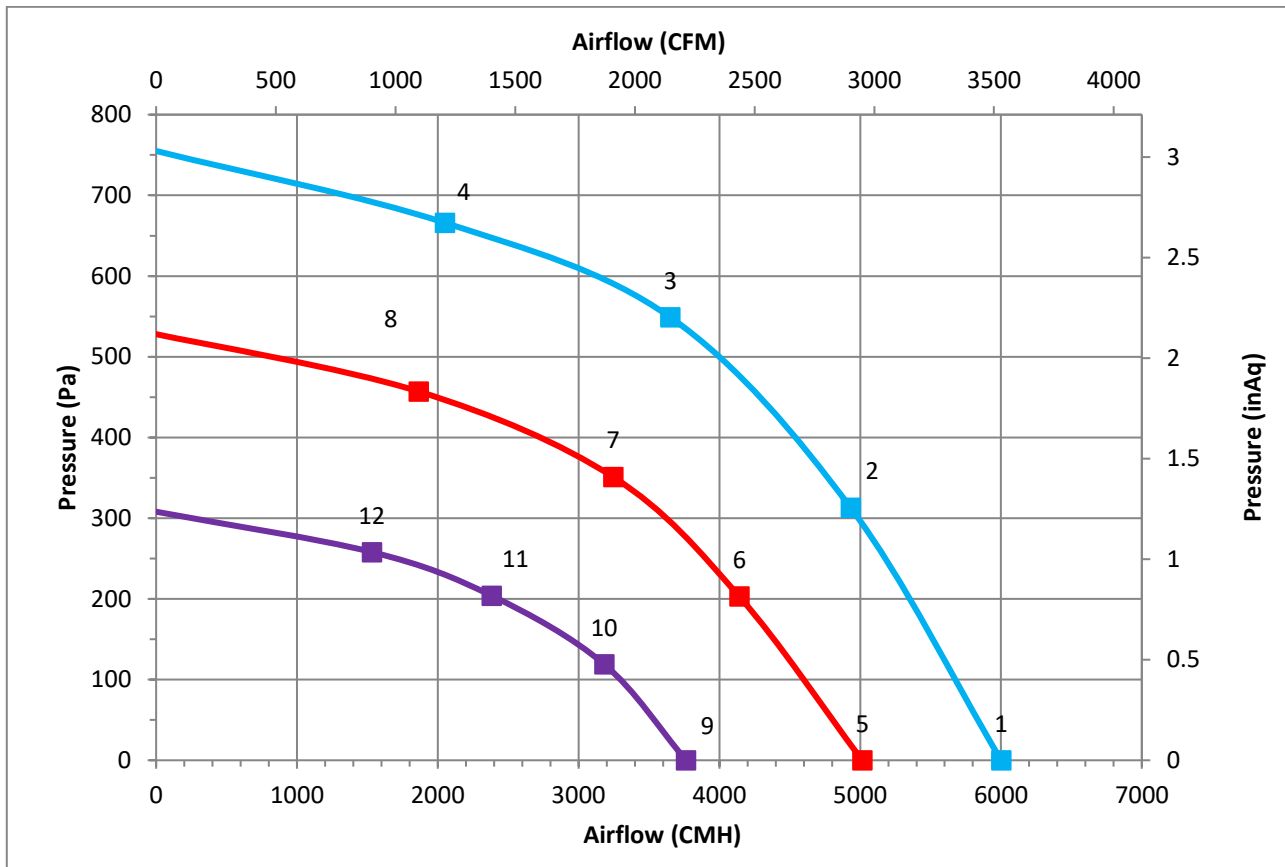
Technical features

Input Side	
Nominal Voltage	3~ 400Vac 50/60Hz
Input Source	3~ 380Vac - 480Vac
Power @ Free air	640 W
Power @ Max. load	1000 W
Output Side	
Speed (RPM)	1850
Qmax. (CMH / CFM)	6001 / 3532
Pmax. (Pa / inAq)	755 / 3.03
Noise (dB-A) @ Qmax.	79.0
Functions	
Passive power factor correction	
Control input 0-10VDC / PWM / 4-20mA.	
Output +10VDC (±10%), max. 10mA.	
Control voltage output: 0-10VDC.	
RS485 control bus	
Alarm relay, Locked rotor protection, Soft start.	
Speed telling, Frequency generator signal.	
Voltage / Current monitoring.	

Physical	
Rotation Direction	CW, Seen on rotor
Material (Impeller / Frame)	Aluminum sheet / Die-cast aluminum
Bearing system	Ball bearings
Weight (kg)	11.9
Electrical leads	Via terminal block
Environmental	
Operating temperature range	-25 ~ +60 °C
Storage temperature range	-40 ~ +70 °C
Safety	
Safety	UL; cUL; TUV
IP Level	IP54
EMC	EN61000-6-2/3 , EN61000-3-2/3
Protection class	I
Insulation class	B
Leakage current	≤ 3.5 mA
Motor protection	Over temperature protected
Life expectancy	60,000 hrs at 40 °C / 15 ~ 65 %RH

NOTE : Delta reserves the right to change specifications and other product information without prior notice.

P & Q curves



Measure data:

	P [Pa]	Q [CMH]	N [R.P.M.]	P1 [W]	I [A]	Lp [dB(A)]
1	0	6001	1850	640	1.20	79.0
2	313	4932	1852	896	1.56	
3	549	3651	1854	983	1.72	
4	666	2051	1851	816	1.48	
5	0	5012	1545	371	0.74	75.5
6	203	4139	1550	529	1.02	
7	351	3245	1548	579	1.10	
8	457	1864	1552	512	1.00	
9	0	3763	1186	184	0.39	70.0
10	119	3182	1188	243	0.50	
11	204	2382	1182	263	0.54	
12	258	1532	1188	246	0.51	

Test Condition :

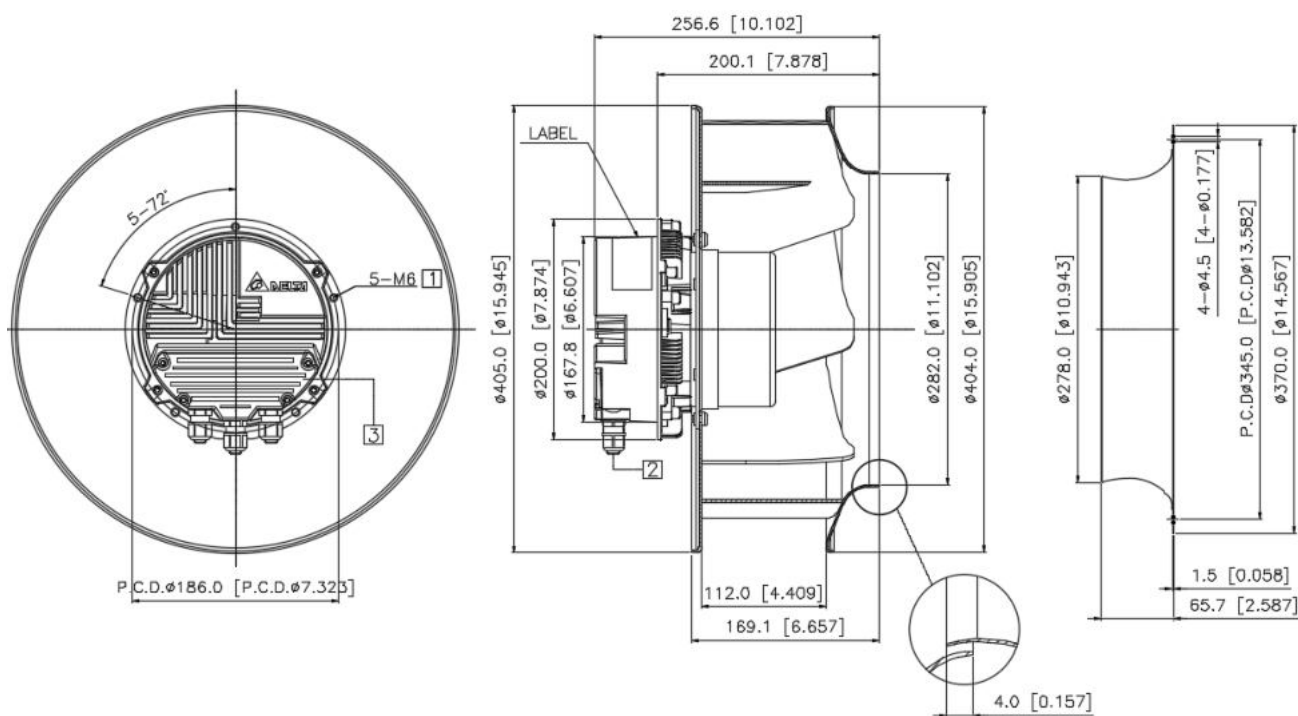
- Input Voltage: Nominal Voltage
- Temperature : Room Temperature
- Humidity : 65%RH
- Measured with inlet cone.
- Noise (Lp) is measured at a distance of one meter from the inlet side.

Dimension drawing

Label :



Fan :




Note :

1. Depth of screw : 12 ~16 mm.
2. Cable Diameter : ϕ 6.0 ~ ϕ 10.0 mm
3. Open the cover and refer to definition of terminal block.


UNIT : mm[INCH]





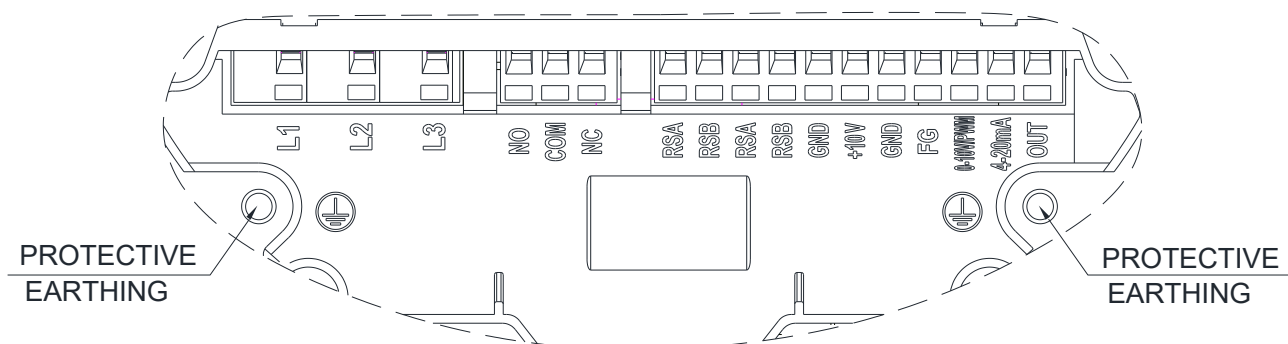
Definition of terminal block




	Text	Functions
Power	L1	AC main (3~ 380-480VAC)
	L2	AC main (3~ 380-480VAC)
	L3	AC main (3~ 380-480VAC)
Status	NO	Alarm relay, open by failure
	COM	Alarm relay, common (2A/250VAC)
	NC	Alarm relay, close by failure
Signal	RSA	RS485-A
	RSB	RS485-B
	RSA	RS485-A
	RSB	RS485-B
	GND	Ground
	+10V	+10V output, MAX 10mA (For external potentiometer)
	GND	Ground
	FG	Frequency generator (FG) signal
	0-10V/PWM	Speed control ,input 0-10VDC
	4-20mA	Speed control ,input 4-20mA
	OUT	Control voltage output 0-10VDC (For external potentiometer)

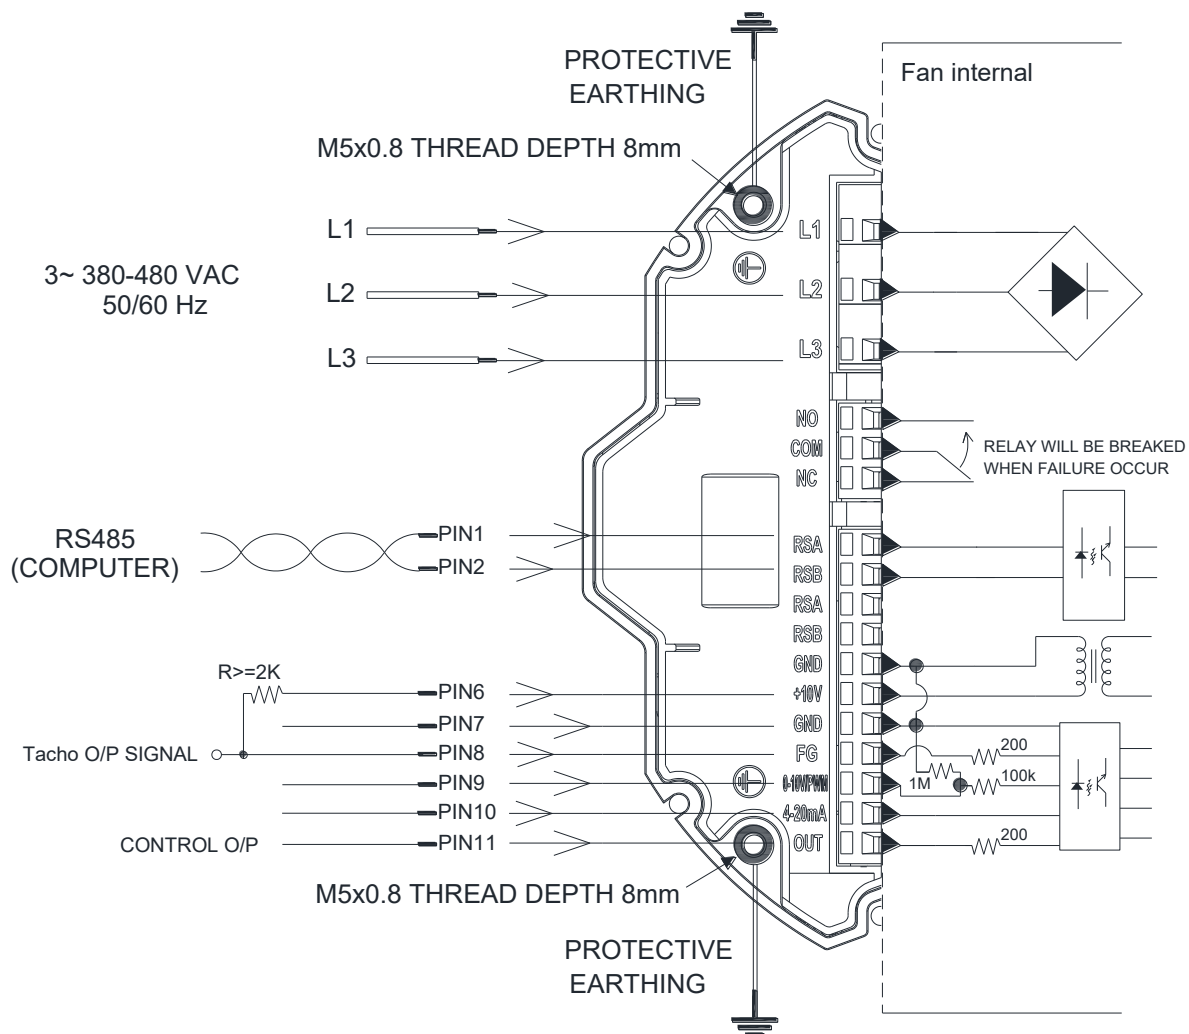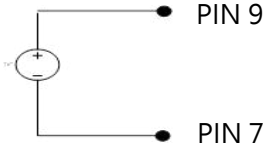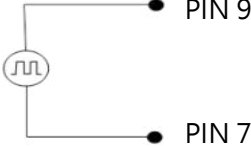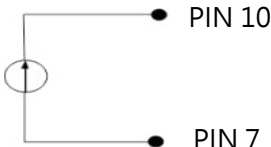
Lead wire connection:



Speed setting	
<p>Full Speed</p> 	<p>Short PIN6 & PIN9 Fan will run full speed.</p>
<p>Voltage Control A</p> 	<p>Connector 1-10kΩ variable resistor Between +10VDC with GND and 0-10V/PWM Turn the variable resistor · can change the '0-10V/PWM' voltage (0...10V) °</p>
<p>Voltage Control B</p> <p>0-10V DC Source</p> 	<p>Use voltage source support 0~10VDC voltage DC+ : connector PIN9(+) DC - : connector PIN7(-)</p>
<p>PWM Control</p> <p>PWM Generator</p> 	<p>PWM duty control PWM amplitude is 10VDC(+ -5%) Frequency Range is 100Hz...100kHz -PWM duty higher than 15%, fan start up ° -PWM duty lower than 5%, fan stop °</p>
<p>Current Control</p> <p>4-20mA Current Source</p> 	<p>4~20mA Current Control Open 0-10V/PWM PIN - Lower than 4.8 mA → Fan Stop - Higher than 5.6 mA → Fan Start up - Higher than 19.5 mA → Maximum Speed</p>

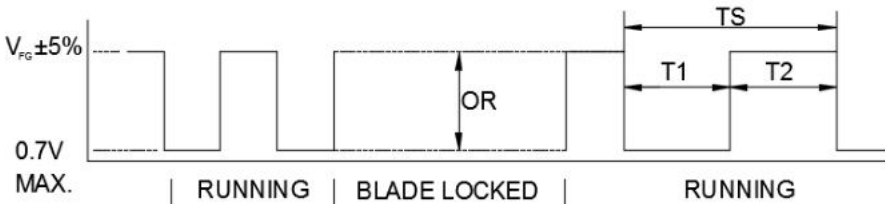Signal function																
RS485 control function	<p>RS485 control function</p> <ul style="list-style-type: none"> -Select the control mode of speed, fixed speed or fixed PWM duty -Speed and power consumption feedback. -Allow multiple FANs control and status patrol. 															
Control O/P	<p>The analog signal level is the derivative of current control level.</p> <table border="1"> <thead> <tr> <th>Current (mA)</th> <th>Control O/P (VDC) (REF)</th> </tr> </thead> <tbody> <tr> <td>4.0</td> <td>0</td> </tr> <tr> <td>6.3</td> <td>1.54</td> </tr> <tr> <td>14.0</td> <td>6.15</td> </tr> <tr> <td>19.5</td> <td>9.33</td> </tr> </tbody> </table>	Current (mA)	Control O/P (VDC) (REF)	4.0	0	6.3	1.54	14.0	6.15	19.5	9.33					
Current (mA)	Control O/P (VDC) (REF)															
4.0	0															
6.3	1.54															
14.0	6.15															
19.5	9.33															
Voltage/PWM control	<p>The speed comparison will control level</p> <table border="1"> <thead> <tr> <th>Voltage (V)</th> <th>PWM (%)</th> <th>Speed (RPM) (REF)</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>0</td> <td>0</td> </tr> <tr> <td>1.5</td> <td>15</td> <td>360 ±50RPM</td> </tr> <tr> <td>6.0</td> <td>60</td> <td>1240 ±8%</td> </tr> <tr> <td>9.5</td> <td>95</td> <td>1850 ±5%</td> </tr> </tbody> </table>	Voltage (V)	PWM (%)	Speed (RPM) (REF)	0	0	0	1.5	15	360 ±50RPM	6.0	60	1240 ±8%	9.5	95	1850 ±5%
Voltage (V)	PWM (%)	Speed (RPM) (REF)														
0	0	0														
1.5	15	360 ±50RPM														
6.0	60	1240 ±8%														
9.5	95	1850 ±5%														
Current control	<p>The speed comparison will control level</p> <table border="1"> <thead> <tr> <th>Current (mA)</th> <th>Speed (RPM) (REF)</th> </tr> </thead> <tbody> <tr> <td>4.0</td> <td>0</td> </tr> <tr> <td>6.3</td> <td>370 ±50RPM</td> </tr> <tr> <td>14.0</td> <td>1260 ±8%</td> </tr> <tr> <td>19.5</td> <td>1850 ±5%</td> </tr> </tbody> </table>	Current (mA)	Speed (RPM) (REF)	4.0	0	6.3	370 ±50RPM	14.0	1260 ±8%	19.5	1850 ±5%					
Current (mA)	Speed (RPM) (REF)															
4.0	0															
6.3	370 ±50RPM															
14.0	1260 ±8%															
19.5	1850 ±5%															
Alarm state	<p>NO and COM will OPEN ; NC and COM will CLOSE.</p>															
FG	<p> $V_{CE(sat)} = 0.7V \text{ MAX.}$ $V_{FG} = 30.0V \text{ MAX.}$ $I_C = 5mA \text{ MAX.}$ $R \geq V_{FG} / I_C$ </p> <p>Frequency generator waveform</p>  <p> $N=R.P.M$ 1 PULSE PER REVOLUTION $TS=60/N(\text{SEC})$ $T1=T2=1/2 \text{ TS}$ </p>															

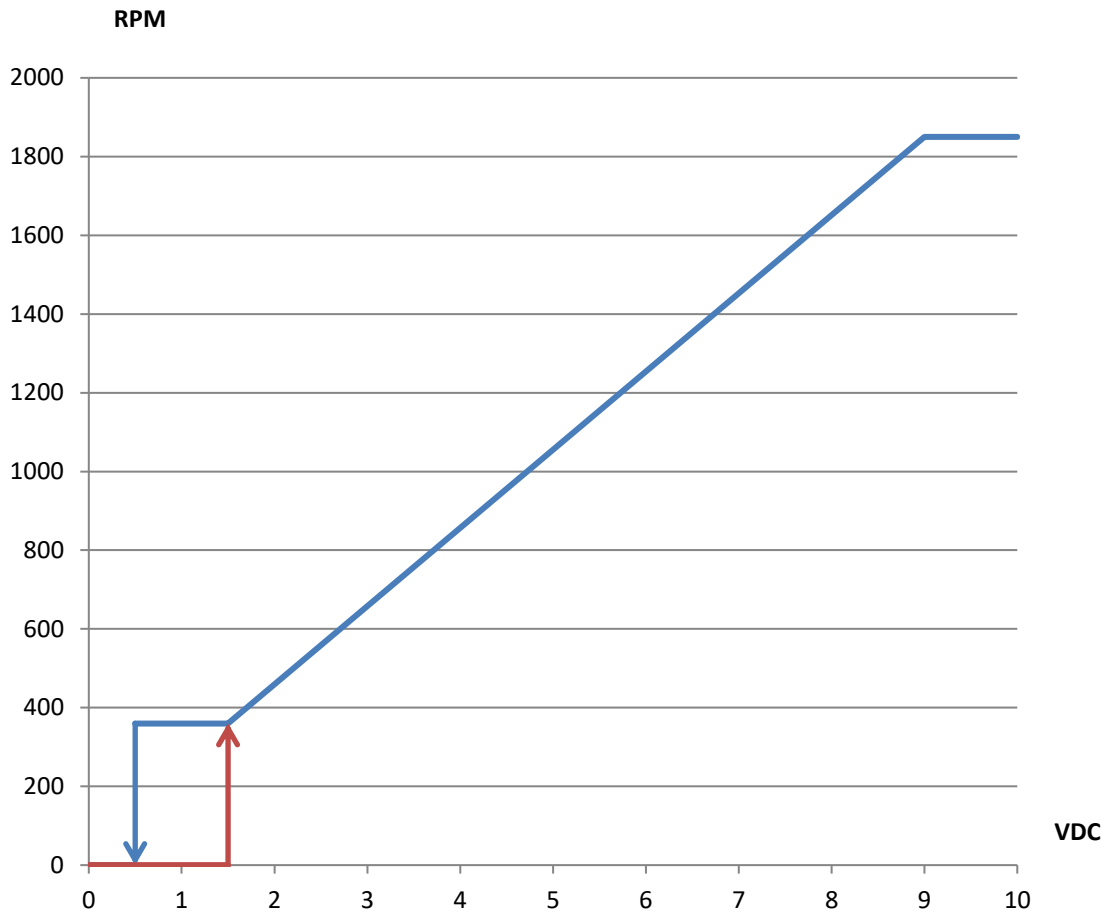Control Voltage VS. RPM Curve



Voltage(VDC) , PWM duty (%), 4~20mA table

Voltage	0	0.5	1	1.5	2	3	4	5	6	7	8	9	10	VDC
PWM duty	0	5	10	15	20	30	40	50	60	70	80	90	100	%
4~20 mA	4	5	5.6	6	7.2	8.8	10.4	12	13.6	15.2	16.8	19	20	mA