

Customer	
Description DC FAN	
Part No	_REV
Delta Model No. <u>AFB1224HHE-CR00</u>	_REV00
Sample Issue No	
Sample Issue Date_AUG.24.2012	
PLEASE SEND ONE COPY OF THIS SE AFTER YOU SIGNED APPROVAL FOR ARRANGMENT.	
APPROVED BY:	
DATE :	

DELTA ELECTRONICS, INC.

**TAOYUAN PLANT** 

252, SHANG YING ROAD, KUEI SAN INDUSTRIAL ZONE TAOYUAN SHIEN, TAIWAN, R.O.C.

TEL:886-(0)3-3591968 FAX:886-(0)3-3591991 DELTA ELECTRONICS, INC. 252, SHANG YING ROAD, KUEI SAN TAOYUAN HSIEN 333, TAIWAN, R. O. C.

# 

TEL: 886-(0)3-3591968

Customer:		
Description:	DC FAN	
Customer P/N:		REV:
Delta Model NO.:	AFB1224HHE-CR00	
Sample Rev:	00	Issue N0:

Sample Rev: 00 Issue NO:
Sample Issue Date: Quantity:

## 1. SCOPE:

THIS SPECIFICATION DEFINES THE ELECTRICAL AND MECHANICAL CHARACTERISTICS OF THE DC BRUSHLESS AXIAL FLOW FAN

### 2. CHARACTERS:

ITEM	DESCRIPTION		
RATED VOLTAGE	24 VDC		
OPERATION VOLTAGE	14.0 - 27.6 VDC		
START VOLATGE (ENVIRONMENT TEMPERATURE AT 25°C)	≤ 14.0 VDC.		
INPUT CURRENT	0.27 (MAX. 0.45) A		
INPUT POWER	6.48 (MAX 10.80) W		
SPEED	3500 ± 10% R.P.M.		
MAX. AIR FLOW (AT ZERO STATIC PRESSURE)	3.704 (MIN. 3.333 ) M <sup>3</sup> /MIN. 130.80 (MIN. 117.72 ) CFM		
MAX. AIR PRESSURE (AT ZERO AIRFLOW)	11.48 (MIN. 9.29 ) mmH <sub>2</sub> 0 0.452 (MIN. 0.366 ) inchH <sub>2</sub> 0		
ACOUSTICAL NOISE (AVG.)	47.0 (MAX. 51.0) dB-A		
INSULATION TYPE	UL: CLASS A		


(continued)

PART NO:
DELTA MODEL: AFB1224HHE-CR00

INSULATION STRENGTH	10 MEG OHM MIN. AT 500 VDC (BETWEEN FRAME AND (+) TERMINAL)
DIELECTRIC STRENGTH	5 mA MAX. AT 500 VAC 50/60 Hz ONE MINUTE, (BETWEEN FRAME AND (+) TERMINAL)
EXTERNAL COVER	OPEN TYPE
LIFE EXPECTANCE	70,000 HOURS CONTINOUS OPERATION AT 40 °C WITH 15 ~ 65 %RH.
ROTATION	CLOCKWISE VIEW FROM NAME PLATE SIDE
OVER CURRENT SHUT DOWN	THE CURRENT WILL SHUT DOWN WHEN LOCKING ROTOR.
LEAD WIRE	UL 1007 -F- AWG #24 BLACK WIRE NEGATIVE(-) RED WIRE POSITIVE(+) BLUE WIRE LOCK SIGNAL(-R00)

NOTES: 1. ALL READINGS ARE MEASURED AFTER STABLY WARMING UP THROUGH 10 MINUTES.

- 2. STANDARD AIR PROPERTY IS AIR AT (Td) 25°C TEMPERATURE, (RH) 65% RELATIVE HUMIDITY, AND (Pb) 760 mmHg BAROMETRIC PRESSURE.
- 3. THE VALUES WRITTEN IN PARENS, ( ), ARE LIMITED SPEC.
- 4. ACOUSTICAL NOISE MEASURING CONDITION:

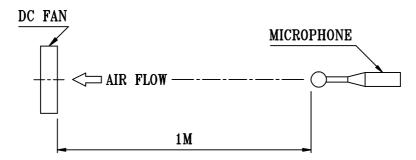

NOISE IS MEASURED AT RATED VOLTAGE IN FREE AIR IN ANECHOIC CHAMBER WITH B & K SOUND LEVEL METER WITH MICROPHONE AT A DISTANCE OF ONE METER FROM THE FAN INTAKE.

A00

# 5. PROTECTION:

#### 5-1. LOCKED ROTOR PROTECTION

IMPEDANCE OF MOTOR WINDING PROTECTS MOTOR FROM FIRE IN 96 HOURS OF LOCKED ROTOR CONDITION AT THE RATED VOLTAGE.

### 5-2. POLARITY PROTECTION

BE CAPABLE OF WITHSTANDING IF REVERSE CONNECTION FOR POSITIVE AND NEGATIVE LEADS.

### 6. RE OZONE DEPLETING SUBSTANCES:

6-1. NO CONTAINING PBBs, PBBos, CFCs, PBBEs, PBDPEs AND HCFCs.


#### 7. PRODUCTION LOCATION

7-1. PRODUCTS WILL BE PRODUCED IN CHINA OR THAILAND.

PART NO:

DELTA MODEL: AFB1224HHE-CR00

# 8. P & Q CURVE:

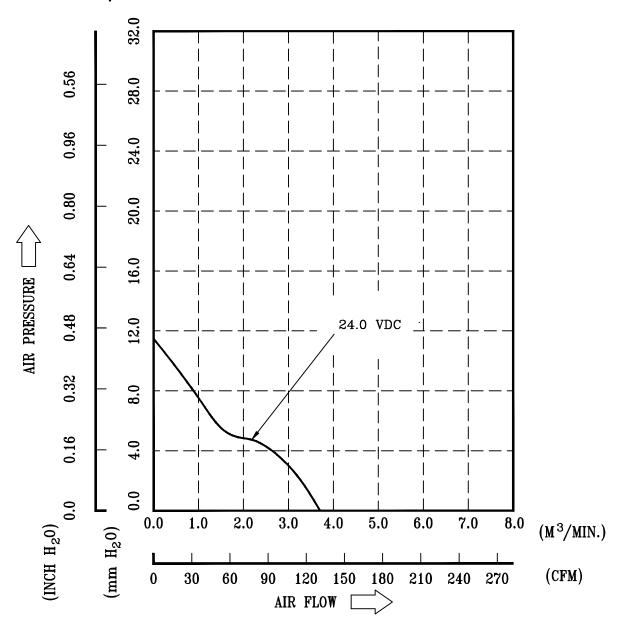

\* TEST CONDITION: INPUT VOLTAGE ---- OPERATION VOLTAGE TEMPERATURE ---- ROOM TEMPERATURE HUMIDITY ----- 65%RH

page: 4

-----

PART NO:


DELTA MODEL: AFB1224HHE-CR00

\_\_\_\_\_

#### 9. DIMENSION DRAWING:

#### LABEL:



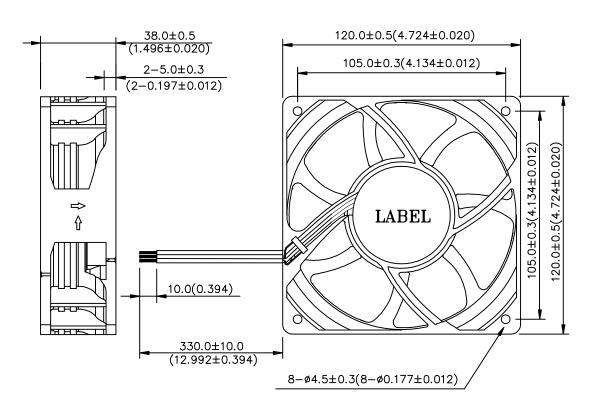


UNIT: mm(INCH)

- 1. THIS PRODUCT IS ROHS COMPLIANT
- 2. UL 1007 -F- AWG #24
  BLACK WIRE NEGATIVE(-)
  RED WIRE POSITIVE(+)
  BLUE WIRE LOCK SIGNAL(-R00)
  page: 5

PART	 		
	AFB1224HHE-CR00		 

10. ROTATION DETECT (RD) SIGNAL:

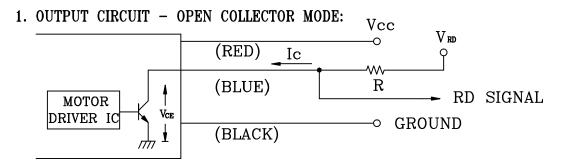

CAUTION: THE RD SINGAL LEAD WIRE MUST BE KEPT AWAY FROM "+" LEAD WIRE & "-" LEAD WIRE.


2. SPECIFICATION:

 $V_{RD}=27.6V\ MAX$ 

 $I_c = 5mA$  MAX.

 $R \ge V_{RD} / I_c$ 

3. ROTATION DETECT WAVEFORM:

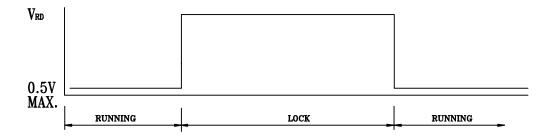



# **Application Notice**

- 1. Delta will not guarantee the performance of the products if the application condition falls outside the parameters set forth in the specification.
- 2. A written request should be submitted to Delta prior to approval if deviation from this specification is required.
- 3. Please exercise caution when handling fans. Damage may be caused when pressure is applied to the impeller, if the fans are handled by the lead wires, or if the fan was hard-dropped to the production floor.
- 4. Except as pertains to some special designs, there is no guarantee that the products will be free from any such safety problems or failures as caused by the introduction of powder, droplets of water or encroachment of insect into the hub.
- 5. The above-mentioned conditions are representative of some unique examples and viewed as the first point of reference prior to all other information.
- 6. It is very important to establish the correct polarity before connecting the fan to the power source. Positive (+) and Negative (-). Damage may be caused to the fans if connection is with reverse polarity, if there is no foolproof method to protect against such error specifically mentioned in this spec.
- 7. Delta fans without special protection are not suitable where any corrosive fluids are introduced to their environment.
- 8. Please ensure all fans are stored according to the storage temperature limits specified. Do not store fans in a high humidity environment. We highly recommend performance testing is conducted before shipping, if the fans have been stored over 6 months.
- 9. Not all fans are provided with the Lock Rotor Protection feature. If you impair the rotation of the impeller for the fans that do not have this function, the performance of those fans will lead to failure.
- 10. Please be cautious when mounting the fan. Incorrect mounting of fans may cause excess resonance, vibration and subsequent noise.
- 11. It is important to consider safety when testing the fans. A suitable fan guard should be fitted to the fan to guard against any potential for personal injury.
- 12. Except where specifically stated, all tests are carried out at room (ambient) temperature and relative humidity conditions of 25°C, 65% RH. The test value is only for fan performance itself.
- 13. Be certain to connect an " $4.7\mu F$  or greater" capacitor to the fan externally when the application calls for using multiple fans in parallel, to avoid any unstable power.

Doc. No: FMBG-ES Form 001 Rev. 0001 Date: June 24, 2009



# **GPWV2.E132003 Fans, Electric - Component**

Page Bottom

### Fans, Electric - Component

See General Information for Fans, Electric - Component

**DELTA ELECTRONICS INC** 

E132003

252 SHANG YING RD KUEI SHAN TAOYUAN HSIEN, 333 TAIWAN

DC Tans, Model AFB followed by 0405, followed by HA, HHA, LA or MA, followed by (Y), where (Y) may be xxxxx, where x may be A through 2, 0 through 9, "" or blank; Model AFB followed by 0505, followed by HB, HHB, LB or MB, followed by (Y), where (Y) may be xxxxxx, where x may be A through 2, 0 through 9, "" or blank; Model AFB followed by 0512, followed by HB, HHB, LB or MB, followed by (Y), where (Y) may be xxxxxx, where x may be A through 2, 0 through 9, "" or blank; Model AFB followed by (Y), Model AFB followed by 0612, 0624, followed by HB, LB or MB, followed by (Y), Model AFB followed by 0612, 0624, followed by HB, LB or MB, HBH, LB, LB, LB, MB, MB, SHB or VHB, followed by Y, (Y), where (Y) may be xxxxxx, where x may be A through 2, 0 through 9, "" or blank; where x may be A through 2, 0 through 9, "" or blank; where x may be A through 2, 0 through 9, "" or blank; where x may be A

Model AFB followed by 02505, followed by HA, HHA, LA or MA, followed by (Y), where (Y) may be xxxxx, where x may be A through Z, 0 through 9, "-" or blank; Model AFB followed by 02512, followed by HA, HHA, LA or MA, followed by (Y), where (Y) may be xxxxx, where x may be A through Z, 0 through 9, "-" or blank; Model AFB followed by 0305, followed by -HA, -LA, -LLA, MA, followed by (Y), where (Y) may be xxxxx, where x may be A through Z, 0 through 9, "-" or blank; Model AFB followed by 0312, followed by HA, LA, MA, followed by (Y), where (Y) may be xxxxx, where x may be A through Z, 0 through 9, "-" or blank; Model AFB followed by 03505, followed by HA, LA, MA, followed by (Y), where (Y) may be xxxxx, where x may be A through Z, 0 through 9, "-" or blank; Model AFB followed by 0405, followed by HD, LD or MD, followed by (Y), where (Y) may be xxxxx, where x may be A through Z, 0 through 9, "-" or blank; Model AFB followed by 03512, followed by LA, MA or HA, followed by (Y), where (Y) may be xxxxx, where x may be A through Z, 0 through 9, "-" or blank; Model AFB followed by 0405, 0412 or 0424, followed by HD, HHD, LD, MD, followed by (Y), where (Y) may be xxxxxx, where x may be A through Z, 0 through 9, "-" or blank; Model AFB followed by 0505, 0512, followed by HA, LA or MA, followed by (Y), where (Y) may be xxxxxx, where x may be A through Z, 0 through 9, "-" or blank; Model AFB followed by 0505, 0512, followed by HB, HHB, LB or MB, followed by (Y), where (Y) may be xxxxxx, where x may be A through Z, 0 through 9, "-" or blank; Model AFB followed by 0505, followed by 0505, followed by HB, HHB, LB, LLD, MB, followed by (Y), where (Y) may be xxxxxx, where x may be A through Z, 0 through 9, "-" or blank; Model AFB followed by 0605, followed by HB, HHB, LB, LLD, MB, followed by (Y), where (Y) may be xxxxxx, where x may be A through Z, 0 through 9, "-" or blank; Model AFB followed by 0612, followed by HA, LA or MA, followed by (Y), where (Y) may be xxxxxx, where x may be A through Z, 0 through 9, "-" or blank; Model

blank; Model AFB followed by 0648, followed by EH, H, HH, L, M, SH or VH, followed by (Y), where (Y) may be xxxxx, where x may be A through 2, 0 through 9, "-" or blank; Model AFB followed by 0712 or 0724, followed by (Y), where (Y) may be xxxxx, where x may be A through Z, 0 through 9, "-" or blank; Model AFB followed by 0712 or 0724, followed by H, HA, HH, HHA, L, LA, M, MA, VH or VHA, followed by (Y), where X may be A through Z, 0 through 9, "-" or blank; Model AFB followed by 0748, followed by 0748, followed by (Y), where (Y) may be xxxxx, where x may be A through Z, 0 through 9, "-" or blank; Model AFB followed by 0812 or 0824, followed by LL, followed by (Y), where (Y) may be xxxxxx, where x may be A through Z, 0 through 9, "-" or blank; Model AFB followed by 0812 or 0824, followed by H, LL, M, SH or VH, followed by (Y), where (Y) may be xxxxxx, where x may be A through Z, 0 through 9, "-" or blank; Model AFB followed by 0812 or 0824, followed by 0812 or 0824, followed by 0812 or 0824, followed by B, HHB, LB, LLB, MB, SHB or VHB, followed by (Y), where (Y) may be xxxxxx, where x may be A through Z, 0 through 9, "-" or blank; Model AFB followed by H, HH, L or M, followed by (Y), where (Y) may be xxxxxx, where x may be A through Z, 0 through 9, "-" or blank; Model AFB followed by 0948, followed by (Y), where (Y) may be xxxxxx, where x may be A through Z, 0 through 9, "-" or blank; Model AFB followed by 0948, followed by H, HH, L or M, followed by (Y), where (Y) may be xxxxxx, where x may be A through Z, 0 through 9, "-" or blank; Model WFB followed by 1212, followed by ME, followed by (Y), where (Y) may be xxxxxx, where x may be A through Z, 0 through 9, "-" or blank; Model WFB followed by 1212, followed by HE, followed by (Y), where (Y) may be xxxxxx, where x may be A through Z, 0 through 9, "-" or blank; Model WFB followed by 1212, followed by HE, followed by (Y), where (Y) may be xxxxxx, where x may be A through Z, 0 through 9, "-" or blank; Model WFB followed by 1212, followed by HE, followed by HE, fol

Model EFB followed by 0912 or 0924, followed by H, HH, L, M, SH or VH.

Models WFB1212H(Y), WFB1212HE(Y), WFB1212M(Y), WFB1212ME(Y), WFB1212L(Y), WFB1212LE(Y), WFB1224H(Y), WFB1224HE(Y), WFB1224HE(Y), WFB1224HE(Y), WFB1224HE(Y), WFB1224HHE(Y), WFB1224HHE(Y), WFB1224HHE(Y), WFB1224HHE(Y), WFB1248HE(Y), WFB1248HE(Y), WFB1248HE(Y), WFB1248HE(Y), WFB1248HHU(Y), KFB2348HHU(Y), KFB2348HHU(Y), KFB2348HHU(Y), KFB2348HHU(Y), KFB2348HHU(Y), KFB2348HHU(Y), KFB2348HHU(Y), KFB2324HHU(Y), KFB2324HHU(Y), KFB2324HHU(Y), KFB2324HHU(Y), KFB2324HHU(Y), WFB1252HHU(Y), WFB1212HF(Y), WFB1212HF

Model BFB followed by 1212, 1224 followed by HE.

Model BFB followed by 0305, 03505, followed by HP, LP, MP.

Model AFB or ASB followed by 0505 or 0512, followed by HA, LA or MA.

Model BFB followed by 0712, 0724, followed by H, L, M, suffixed (Y); Model LFB0512HD(Y)Series, where (Y) may be xxxxx, where x may be A through Z, 0 through 9, "-" or blank.

Model BFC followed by 1212, followed by A, B; Models BFC1212C, BFC1224C, BFC1248C.

Model EFB followed by 0512, followed by HHA, HA, LA or MA; Models EFB0505HA, EFB0505MA, EFB0505LA followed by FOO or STD; Model EFB followed by 0505, followed by HA, LA or MA, followed by FOO or STD.

Model AFC followed by 0512, 0612, 0712, 0812, 0824, 0912 or 0924, followed by "A", "AB", "AD", "B", "BB", "BD" or "C"; Model AFC followed by 0912, followed by "A" or "B", followed by -(H), -(H), -(M); Model ASC followed by 0612, 0812, 0912, followed by "A" or "B"; Model AFC0712D(Y), where (Y) may be A through Z, 0 through 9, "-" or blank.

Model ASB followed by 0605, followed by H, L, M, suffixed (Y); Model ASB followed by 0612, followed by H-SB, L-SB or M-SB, suffixed (Y); Model ASB followed by 0812 or 0824, followed by H, HH, L, LL or M, suffixed (Y); Model ASB followed by 0912, 0924, followed by H, HH, L, L-V, M, suffixed (Y); Model ASB followed by 0924, followed by H, HH, L or M, suffixed (Y); Model ASB0812L-SB, H-SB or M-SB suffixed (Y); Model ASB0912L-SB, ASB0912H-SB or ASB0912H-SB suffixed (Y); Model DSB followed by 0612, 0812, followed by H, H-N, L, L-N, M, M-N, suffixed (Y); Model DSB0624H-(Y), DSB0624H-(Y), DSB0624H-(Y), DSB0624L-(Y), DSB0512HB(Y), DSB0512HB(Y), DSB0512LB(Y), DSB0512LB(Y), DSB0512LB(Y), DSB0512MD(Y), DSB0512LD(Y), DSB0612(X)-A(Y), DSB0612(X)D(Y), DSB0612(A)B(Y) Series, where (A) may be HH, H, M or L, (X) may be H, M or L, (Y) may be xxxxx, where x may be A through Z, 0 through 9, "-" or blank.

Model AFB followed by 0612, followed by H, L or M, followed by SB; Model AFB followed by 0812, followed by H, L or M, followed by SB; Model AFB followed by 0912, followed by H, L or M, followed by SB.

Model AFB followed by 1212, followed by HE, HHE, LE, ME, VHE; Model AFB followed by 1224, followed by HE, HHE, LE, ME, VHE; Model AFB followed by 1248, followed by HE(Y), HHE(Y), LE(Y), ME(Y), VHE(Y), L, M, H, HH, VH, SH; Model EFB followed by 1212, followed by HE(Y), HHE(Y), LE(Y), ME(Y), SHE(Y), VHE(Y); Model EFB followed by 1244, followed by HE(Y), HHE(Y), LE(Y), ME(Y), SHE(Y), VHE(Y); Model EFB followed by 1248, followed by HE(Y), HHE(Y), HHE(Y), AFB1212GHE(Y), AFB1212GHE(Y), AFB1212GHE(Y), AFB1224SHE(Y), AFB1224SHE(Y), AFB1224SHE(Y), AFB1224SHE(Y), AFB1224SHE(Y), AFB1224SHE(Y), AFB1248SHE(Y), AFB1248SHE(Y), AFB1248SHE(Y), MOdels AFB1348 followed by SHE(Y), VHE(Y), HHE(Y), HHE(Y), HHE(Y), HHE(Y), MODEls AFB1312SHE(Y), AFB1312HE(Y), AFB1312HE(Y), AFB1312SHE(Y), AFB1324HHE(Y), AFB1324HHE(

Model BFB followed by 1012, followed by H(Y), HH(Y), VH(Y), SH(Y), EH(Y), L(Y), LL(Y) or M(Y); Model BFB1012M-5J60R; Model BFB followed by 1024, followed by H, HH, L, LL or M, suffixed (Y); Model BFB followed by 1212, followed by H, HH, L, LL, M or VH, suffixed (Y); Model BFB followed by 1224, followed by H, HH, L, LL or M, suffixed (Y); Model BFB followed by 1248, followed by H, HH, L, LL or M, suffixed (Y); Models BFC1012D-A (Y), BFB1012VH-3F16(Y), BFB12(X)(Z)-A(Y); Model SFB0412VH/HH/HM/M(Y), BFB04512HA-SM(Y) Series; Model BFB04512(X)(Y) series, where (X) may be MD/HD/HHD/VHD, (Y) may be (Y) may be xxxxx, where x may be A through Z, 0 through 9, "-" or blank; Models KFB2548HHU(Y), KFB2548HU(Y), BFB04512MD-S(Y) Series, where (X) may be 12, 24 or 48, (Z) may be GH, EH, SH or VH, (Y) may be (Y) may be xxxxx, where x may be A through Z, 0 through 9, "-" or blank.

Model BFB1224HHE-4J97(Y) Series; Model BFB followed by 1212, 1224, followed by HE, HHE, LE, ME or VH; Model BFB followed by 1248, followed by HE, LE or ME; Model BFB followed by 1612, followed by VH, H, L or M; Model BFB followed by 1624, followed by VH, H, L or M; Model BFB followed by 1648, followed by VH, H, L or M.

Models BFB0405HE, -LE, -ME, BFB0412HE, -HHE, -LE, -ME; Models BFB0412HN(Y), BSB0412HN(Y), where (Y) may be xxxxx, where x may be A through Z, 0 through 9, "-" or blank.



# **Certification Record**

CUSTOMER	CLASS	FILE	
Delta Electronics Inc.	3812-30	091949_0_000	
252 Shang Ying Rd, Kuei San	FANS AND BLOWERS- Component Fans		
Taoyuan Hsien			
333			
Taiwan	Refer to Class Description for program details		

## PLEASE UPDATE THE MODELS IN ALPHABETICAL ORDER

• Component fans, D.C. (Brushless), impedance protected, models and electrical ratings are as follows:

Model	Volts (dc)	Amperes (mA)	Optional Suffixes
AFB SERIES			
AFB0405LB	5	200	0 to 9, A to Z, blank or "-
AFB0405MB	5	250	0 to 9, A to Z, blank or "-
AFB0405HB	5	380	0 to 9, A to Z, blank or "-
AFB0405HHB	5	450	0 to 9, A to Z, blank or "-
AFB0412LB	12	90	0 to 9, A to Z, blank or "-
AFB0412MB	12	130	0 to 9, A to Z, blank or "-
AFB0412HB	12	160	0 to 9, A to Z, blank or "-
AFB0412HHB	12	200	0 to 9, A to Z, blank or "-
AFB0412VHB	12	240	0 to 9, A to Z, blank or "-
AFB0412SHB	12	350	0 to 9, A to Z, blank or "-
AFB0424LB	24	80	0 to 9, A to Z, blank or "-
AFB0424MB	24	90	0 to 9, A to Z, blank or "-
AFB0424HB	24	120	0 to 9, A to Z, blank or "-

			11
AFB1212EHE	12	2200	0 to 9, A to Z, blank or "-
AFB1212GHE	12	3240	0 to 9, A to Z, blank or "-
AFB1212HE	12	480	0 to 9, A to Z, blank or "-
AFB1212HHE	12	70	0 to 9, A to Z, blank or "-
AFB1212HHE-8C2A	12	750	0 to 9, A to Z, blank or "-
AFB1212LE	12	300	0 to 9, A to Z, blank or "-
AFB1212ME	12	400	0 to 9, A to Z, blank or "-
AFB1212SHE	12	1600	A to Z, 0 to 9, blank or "-
AFB1212VHE	12	900	0 to 9, A to Z, blank or "-
AFB1224EHE	24	1050	0 to 9, A to Z, blank or "-
AFB1224GHE	24	1600	0 to 9, A to Z, blank or "-
AFB1224HE	24	360	0 to 9, A to Z, blank or "-
AFB1224HHE	24	450	0 to 9, A to Z, blank or "-
AFB1224LE	24	230	0 to 9, A to Z, blank or "-
AFB1224ME	24	300	0 to 9, A to Z, blank or "-
AFB1224SHE	24	750	A to Z, 0 to 9, blank or "-
AFB1224VHE	24	570	0 to 9, A to Z, blank or "-
AFB1248EHE	48	600	0 to 9, A to Z, blank or "-
AFB1248GHE	48	900	0 to 9, A to Z, blank or "-
AFB1248HE	48	180	0 to 9, A to Z, blank or "-
AFB1248HHE	48	230	0 to 9, A to Z, blank or "-
AFB1248LE	48	90	0 to 9, A to Z, blank or "-

# **V D E** Prüf- und Zertifizierungsinstitut

# GUTACHTEN MIT FERTIGUNGSÜBERWACHUNG CERTIFICATE OF CONFORMITY WITH FACTORY SURVEILLANCE

Delta Electronics Inc. 6F, No. 186, Ruey Kuang Road 11491 NEIHU, TAIPEI TAIWAN

ist berechtigt, für ihr Produkt / is authorized to use for their product

Einbauventilator für IT-Geräte Fan for building-in, IT-equipment

die hier abgebildeten markenrechtlich geschützten Zeichen für die ab Blatt 2 aufgeführten Typen zu benutzen / the legally protected Marks as shown below for the types referred to on page 2 ff.



REG.-Nr. 1764 oder/or



oder/or VDE-REG.-Nr. 1764

REG.-Nr. 1764

Geprüft und zertifiziert nach / Tested and certified according to

DIN EN 60950-1 (VDE 0805 Teil 1):2011-01; EN 60950-1:2006 + A11:2009 + A1:2010 DIN EN 60950-1/A12 (VDE 0805-1/A12):2011-08; EN 60950-1/A12:2011-02 IEC 60950-1(ed.2);am1

VDE Prüf- und Zertifizierungsinstitut GmbH VDE Testing and Certification Institute Zertifizierungsstelle / Certification

VDE Zertifikate sind nur gültig bei Veröffentlichung unter: VDE certificates are valid only when published on: Aktenzeichen: 1164100-2611-0011 / 165883

File ref .:

Ausweis-Nr. 40016423 Certificate No.

Blatt 1
Page

Weitere Bedingungen siehe Rückseite und Folgeblätter / further conditions see overleaf and following pages

Offenbach, 2006-01-09

(letzte Änderung/updated 2012-04-10 )

http://www.vde.com/zertifikat http://www.vde.com/certificate





# VDE Prüf- und Zertifizierungsinstitut Gutachten mit Fertigungsüberwachung

Ausweis-Nr. / Blatt / Certificate No. page 40016423 4

Name und Sitz des Genehmigungs-Inhabers / Name andregistered seat of the Certificate holder Delta Electronics Inc., 6F, No. 186, Ruey Kuang Road, 11491 NEIHU, TAIPEI, TAIWAN

Aktenzeichen / File ref. letzte Änderung / updated Datum / Date 1164100-2611-0011 / 165883 / FG13 / DO 2006-01-09

Dieses Blatt gilt nur in Verbindung mit Blatt 1 des Gutachtens mit Fertigungsüberwachung Nr. 40016423. This supplement is only valid in conjunction with page 1 of the Certificate of Conformity with factory surveillance No. 40016423.

```
AFB1224LE/ME/HE/HHE/VHE [new version]
                                       DC 24V (Appendix No.65)
AFB1212SHE [new version]
                             DC 12V (Appendix No.66)
                             DC 12V (Appendix No.66)
AFB1212EHE/GHE
AFB1224SHE [new version]
                             DC 24V (Appendix No.66)
                             DC 24V (Appendix No.66)
AFB1224EHE/GHE
AFB1248SHE
                             DC 48V (Appendix No.66)
                             DC 48V (Appendix No.66)
AFB1248EHE/GHE
AUB0812LD/MD/HD/HHD [new version] DC 12V (Appendix No.67)
AUB0812VHD [new version]
                             DC 12V (Appendix No.67)
BFB0512LA-A/MA-A/HA-A/HHA-A DC 12V (Appendix No.68)
DSB0412LA/MA/HA/HHA
                             DC 12V (Appendix No.69)
DSB0824HH/VH
                             DC 24V (Appendix No.70)
DSB0924L/M/H
                             DC 24V (Appendix No.70)
                             DC 24V (Appendix No.70a)
DSB0924HH
AFB02505LB-A/MB-A/HB-A/HHB-A DC 5V (Appendix No.71)
NFB0612LB/MB/HB
                             DC 12V (Appendix No.72)
NUB0612LB/MB/HB
                             DC 12V (Appendix No.72)
AUB0712HH-T6L1
                             DC 12V (Appendix No.73)
DSB0612LA/MA
                             DC 12V (Appendix No.74)
AFB02505LA/MA/HA/HHA
                             DC 5V (Appendix No.75)
AFB0305LA/MA/HA
                             DC 5V (Appendix No.75)
AFB03505LA/MA/HA
                             DC 5V (Appendix No.75)
BFB0712HD-A
                             DC 12V (Appendix No.76)
                             DC 12V (Appendix No.77)
AUB0812HE/HHE/VHE
AUB0824HE/HHE/VHE
                             DC 24V (Appendix No.77)
AUC0812DE
                             DC 12V (Appendix No.77)
                             DC 12V (Appendix No.78)
FFB03612EHN
                             DC 5 V (Appendix No. 79)
BSB04505HA
                             DC 5 V ( Appendix No. 80 )
BFB0605LB-SX
QFR0812DE
                             DC 12V (Appendix No. 82)
Zusatz zur Typenbezeichnung
                             Optional - Anhang 0 bis 9 oder A bis Z
                             kann hinzugefügt sein für optionale Signal-Ausgänge
Addition for type designation
                             Optional - Suffix 0 to 9 or A to Z
                             may be added denoting optional signal leads
                             min. DC 5V -
Nennspannung
                             max. DC 48V (SELV)
Rated voltage
```

Fortsetzung siehe Blatt 5 / continued on page 5

VDE Prüf- und Zertifizierungsinstitut GmbH \* Testing and Certification Institute

# VDE Prüf- und Zertifizierungsinstitut Gutachten mit Fertigungsüberwachung

Ausweis-Nr. / Blatt / Certificate No. page 40016423 5

Name und Sitz des Genehmigungs-Inhabers / Name andregistered seat of the Certificate holder
Delta Electronics Inc., 6F, No. 186, Ruey Kuang Road, 11491 NEIHU, TAIPEI, TAIWAN

Aktenzeichen / File ref. 1164100-2611-0011 / 165883 / FG13 / DO letzte Änderung / updated Datum / Date 2012-04-10 2006-01-09

Dieses Blatt gilt nur in Verbindung mit Blatt 1 des Gutachtens mit Fertigungsüberwachung Nr. 40016423. This supplement is only valid in conjunction with page 1 of the Certificate of Conformity with factory surveillance No. 40016423.

Nennstrom

siehe Anlagen Nr. 1 - 82 / see Appendices No. 1 - 82

Rated current

Umgebungstemperatur Ambient temperature siehe Anlagen / see Appendices

Schutzklasse

Class

III

Schutzart Einbaulüfter (für IT-Geräte)

Degree of protection Fan for building-in (for IT equipment)

Einbaubedingungen Beim Einbau des genehmigten Erzeugnisses,

der entsprechend der zugehörigen Installationsanleitung zu erfolgen hat, ist darauf zu achten, dass alle Anforderungen gemäss der oben genannten Bestimmung(en) eingehalten sind.

Built-in requirements For the installation of the certified equipment,

which has to be carried out according to the respective installation manual, all requirements of the standard(s) mentioned above have to be

fulfilled.

Die Ventilatoren entsprechen dem Abschnitt 4.4.5.1c. Im End-system sollten entsprechende Schutzmaßnahmen getroffen werden, die das Berühren der beweglichen Teile des Ventilators durch den Benützer verhindern. Ein Warnsymbol oder ein Text in Übereinstimmung mit Abschnitt 4.4.5.2 sollen im Endgerät angebracht werden.

The fans are classified in accordance with clause 4.4.5.1c. Proper protection shall be provided in the end-system so that the possibility of contact by user with the moving parts of the fan is unlikely. A warning symbol or a warning statement in accordance with clause 4.4.5.2 shall be provided in the end-system.

Weitere Angaben
Further information

siehe Anlagen Nr. 1 - 82 / see Appendices No. 1 - 82

Fortsetzung siehe Blatt 6 / continued on page 6

# VDE Prüf- und Zertifizierungsinstitut Gutachten mit Fertigungsüberwachung

Ausweis-Nr. / Blatt / Certificate No. page 40016423 6

Name und Sitz des Genehmigungs-Inhabers / Name andregistered seat of the Certificate holder
Delta Electronics Inc., 6F, No. 186, Ruey Kuang Road, 11491 NEIHU, TAIPEI, TAIWAN

Aktenzeichen / File ref. 1164100-2611-0011 / 165883 / FG13 / DO

letzte Änderung / updated Datum / Date 2012-04-10 2006-01-09

Dieses Blatt gilt nur in Verbindung mit Blatt 1 des Gutachtens mit Fertigungsüberwachung Nr. 40016423. This supplement is only valid in conjunction with page 1 of the Certificate of Conformity with factory surveillance No. 40016423.

Dieser Zeichengenehmigungs-Ausweis bildet eine Grundlage für die EG-Konformitätserklärung und CE-Kennzeichnung durch den Hersteller oder dessen Bevollmächtigten und bescheinigt die Konformität mit den grundlegenden Schutzanforderungen der EG-Niederspannungsrichtlinie 2006/95/EG mit ihren Änderungen.

This Marks Approval is a basis for the EC Declaration of Conformity and the CE Marking by the manufacturer or his agent and proves the conformity with the essential safety requirements of the EC Low-Voltage Directive 2006/95/EC including amendments.

VDE Prüf- und Zertifizierungsinstitut GmbH VDE Testing and Certification Institute Fachgebiet FG13 Section FG13

# VDE Prüf- und Zertifizierungsinstitut Gutachten mit Fertigungsüberwachung

Ausweis-Nr. / Certificate No. Supplement 40016423

Beiblatt /

Name und Sitz des Genehmigungs-Inhabers / Name andregistered seat of the Certificate holder Delta Electronics Inc., 6F, No. 186, Ruey Kuang Road, 11491 NEIHU, TAIPEI, TAIWAN

Aktenzeichen / File ref. 1164100-2611-0011 / 165883 / FG13 / DO letzte Änderung / updated Datum / Date 2012-04-10 2006-01-09

Dieses Beiblatt ist Bestandteil des Gutachtens mit Fertigungsüberwachung Nr. 40016423. This supplement is part of the Certificate of Conformity with factory surveillance No. 40016423.

## Einbauventilator für IT-Geräte Fan for building-in, IT-equipment

Fertigungsstätte(n) Place(s) of manufacture

Referenz/Reference

30009495

**Delta Electronics** (Dongguan) Co., Ltd. Hetianxia village

523300 SHIJIE TOWN, DONGGUAN CITY

Guanadona CHINA

Referenz/Reference

30011790

**Delta Electronics** (Jiang Su) Ltd.

No. 1688 Jiangxing East Road Wujiang Economy Developm. Zone

215200 WUJIANG CITY, SUZHOU CITY

Jiangsu **CHINA** 

Referenz/Reference

30013236

Delta Electronics (Thailand)

Public Co., Ltd.

111 Moo 9 Wellgrow Industrial Est. Bangna-Trad Rd.

Tambon Bangwa, Bangpakong TH-24180 CHACHOENGSAO

VDE Prüf- und Zertifizierungsinstitut GmbH VDE Testing and Certification Institute Fachgebiet FG13 Section FG13

# VDE Prüf- und Zertifizierungsinstitut Gutachten mit Fertigungsüberwachung

Ausweis-Nr. / Infoblatt / Certificate No. Info sheet

40016423

Name und Sitz des Genehmigungs-Inhabers / Name andregistered seat of the Certificate holder Delta Electronics Inc., 6F, No. 186, Ruey Kuang Road, 11491 NEIHU, TAIPEI, TAIWAN

Aktenzeichen / File ref. 1164100-2611-0011 / 165883 / FG13 / DO letzte Änderung / updated Datum / Date 2006-01-09 2012-04-10

Dieses Blatt gilt nur in Verbindung mit Blatt 1 des Gutachtens mit Fertigungsüberwachung Nr. 40016423. This supplement is only valid in conjunction with page 1 of the Certificate of Conformity with factory surveillance No. 40016423.

#### Genehmigung zum Benutzen des auf Seite 1 abgebildeten markenrechtlich geschützten Zeichens des VDE:

Grundlage für die Benutzung sind die Allgemeinen Geschäftsbedingungen (AGB) der VDE Prüf- und Zertifizierungsinstitut GmbH (www.vde.com\AGB-Institut). Das Recht zur Benutzung erstreckt sich nur auf die bezeichnete Firma mit den genannten Fertigungsstätten und die oben aufgeführten Produkte mit den zugeordneten Bezeichnungen. Die Fertigungsstätte muss so eingerichtet sein, dass eine gleichmäßige Herstellung der geprüften und zertifizierten Ausführung gewährleistet ist.

Die Genehmigung ist so lange gültig wie die VDE-Bestimmungen gelten, die der Zertifizierung zugrunde gelegen haben, sofern sie nicht auf Grund anderer Bedingungen aus der VDE Prüf- und Zertifizierungsordnung (PM102) zurückgezogen werden muss.

Der Gültigkeitszeitraum einer VDE-GS-Zeichengenehmigung kann auf Antrag verlängert werden. Bei gesetzlichen und / oder normativen Änderungen kann die VDE-GS-Zeichengenehmigung ihre Gültigkeit zu einem früheren als dem angegebenen Datum verlieren.

Produkte, die das Biozid Dimethylfumarat (DMF) enthalten, dürfen gemäß der Kommissionsentscheidung 2009/251/EG nicht mehr in den Verkehr gebracht oder auf dem Markt bereitgestellt werden.

Der VDE-Zeichengenehmigungsausweis wird ausschließlich auf der ersten Seite unterzeichnet.

#### Approval to use the legally protected Mark of the VDE as shown on the first page:

Basis for the use are the general terms and conditions of the VDE Testing and Certification Institute (www.vde.com\terms-institute). The right to use the mark is granted only to the mentioned company with the named places of manufacture and the listed products with the related type references. The place of manufacture shall be equipped in a way that a constant manufacturing of the certified construction is assured.

The approval is valid as long as the VDE specifications are in force, on which the certification is based on, unless it is withdrawn according to the VDE Testing and Certification Procedure (PM102E).

The validity period of a VDE-GS-Mark Approval may be prolonged on request. In case of changes in legal and / or normative requirements, the validity period of a VDE-GS-Mark Approval may be shortened.

Products containing the biocide dimethylfumarate (DMF) may not be marketed or made available on the EC market according to the Commission Decision 2009/251/EC.

The approval is solely signed on the first page.