

Product Data Sheet

9295414754

VWS0184XULCZ

2214F/2TDHOU-754

**ebmpapst**

The engineer's choice



2214F/2TDHOU-754

INDEX

- 1 General ..... 3**
- 2 Mechanics ..... 3**
  - 2.1 General..... 3
  - 2.2 Connections..... 3
- 3 Operating Data ..... 5**
  - 3.1 Electrical Interface - Input..... 5
  - 3.2 Electrical Operating Data ..... 7
  - 3.3 Electrical Interface - Output..... 8
  - 3.4 Electrical Features ..... 9
  - 3.5 Aerodynamics ..... 11
  - 3.6 Sound Data..... 12
- 4 Environment..... 12**
  - 4.1 General..... 12
  - 4.2 Climatic Requirements ..... 12
  - 4.3 Mechanical Requirements..... 13
- 5 Safety..... 14**
  - 5.1 Electrical Safety ..... 14
  - 5.2 Approval Tests ..... 14
- 6 Reliability..... 14**
  - 6.1 General..... 14

1 General

Fan type	Fan	
Rotating direction looking at rotor	Counterclockwise	
Airflow direction	Air outlet over struts	
Bearing system	Ball bearing	
Mounting position - shaft	Any	


2 Mechanics

2.1 General

Width	200 mm	
Height	200 mm	
Depth	51,0 mm	
Diameter	220 mm	
Mass	1,0 kg	
Housing material	Metal	
Impeller material	Plastic	

2.2 Connections

Electrical connection	Wires - Plug	
Lead wire length	L = 360 mm	
Tolerance		
Plug	See drawing	
Contact	See drawing	

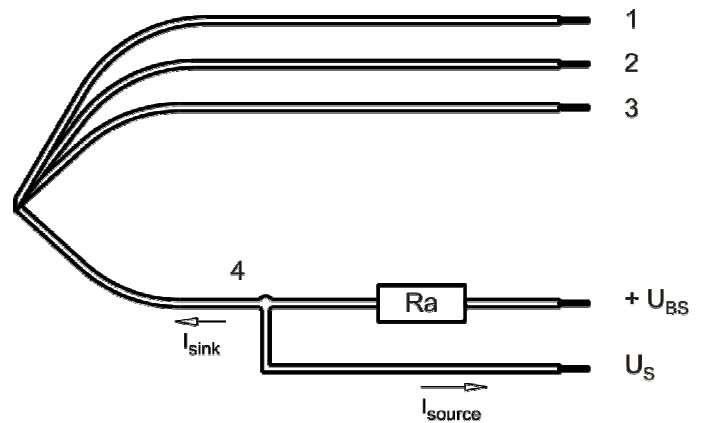

Wire	Color	Operation	Wire size	Insulation diameter
1	red	+ UB	AWG 22	1,7 mm
2	blue	- GND	AWG 22	1,7 mm
3	violet	PWM	AWG 22	1,7 mm
4	white	Tacho	AWG 22	1,7 mm

The auxiliaries shown on the schematic diagram (which are required for the intended use) are not part of our delivery.


### 3 Operating Data

#### 3.1 Electrical Interface - Input


Control input	Analog
---------------	--------

#### Features

PWM - Frequency	1 kHz - 10 kHz typical: 2 kHz
Input voltage range	0 V - 10 V

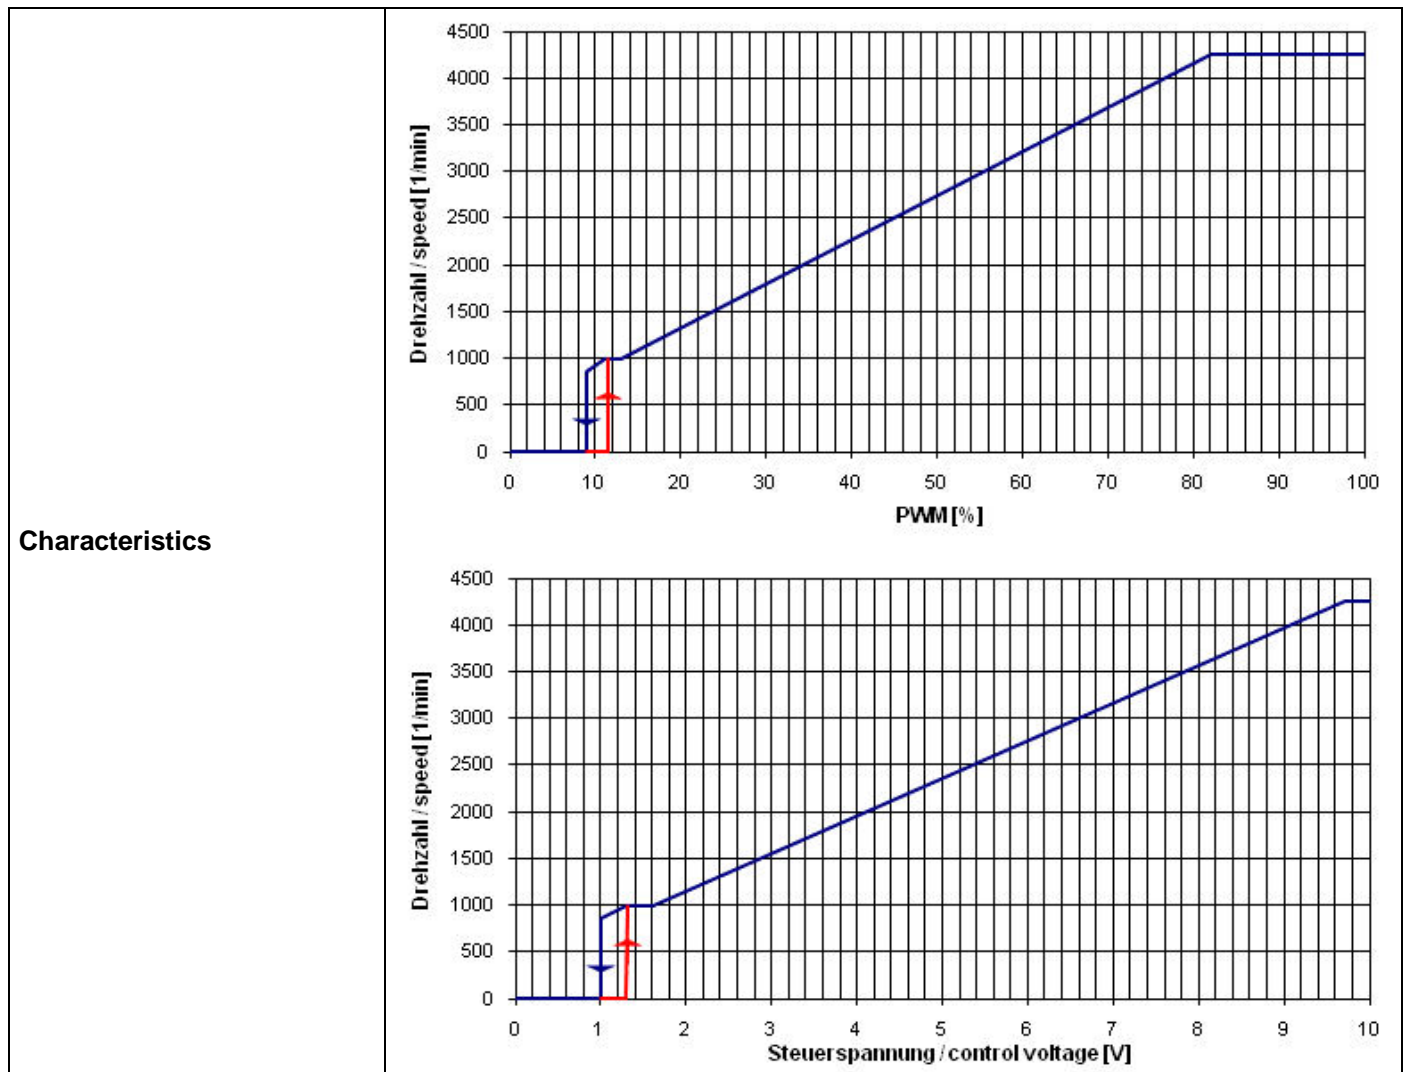

Schematics

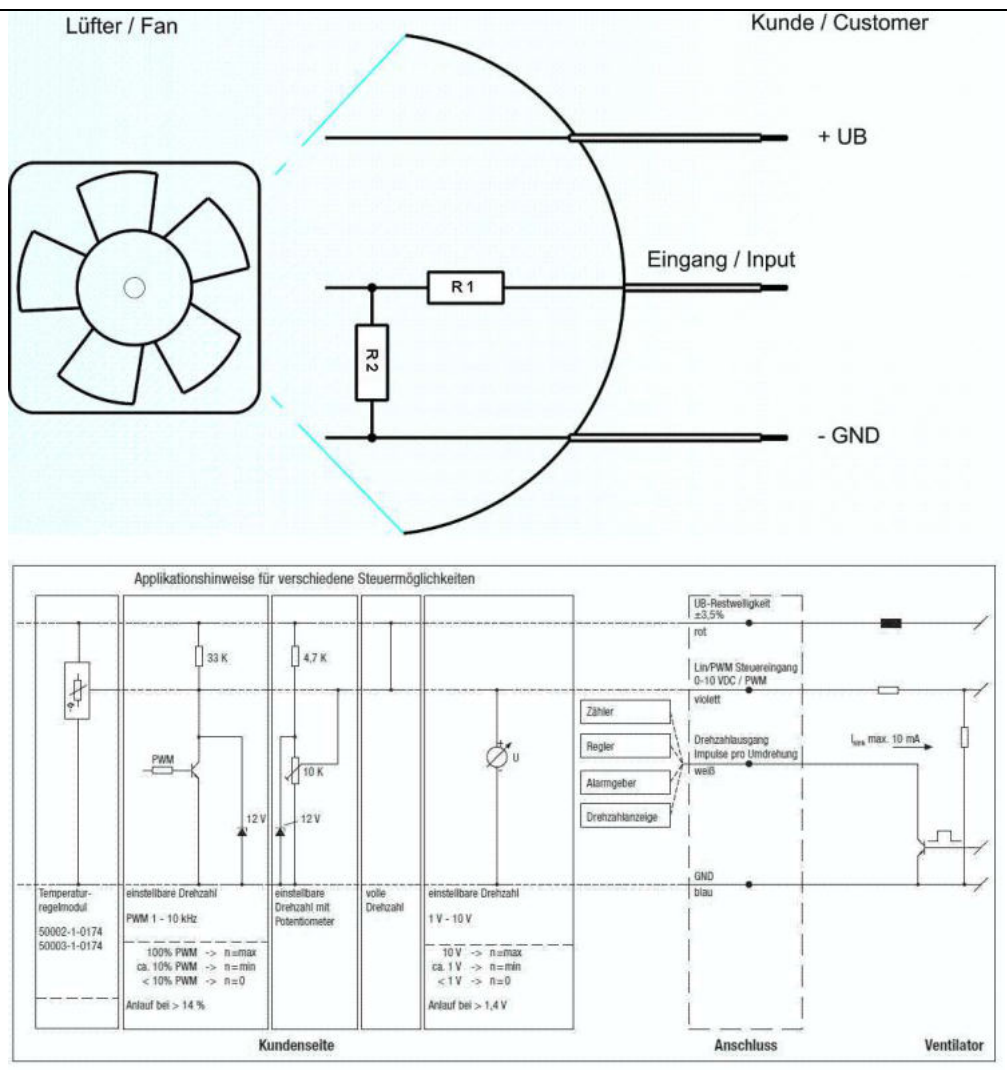

**Input voltage divider:**

R1 = 47 kOhm  
 R2 = 36 kOhm

**Speed control:**

By pulse-width modulation (PWM) 0 ... 100%  
 Open collector in relation to Signal-ground  
 Frequency = 2 kHz (1 - 10 kHz)  
 Push-Pull-Signal with high = 12 V

**Information to the curve PWM:**

0% - 10% PWM: 0 1/min  
 11% PWM: 1.000 1/min (Fan on, coming from 0% PWM)  
 11% - 13% PWM: 1.000 1/min (corresponding to min. speed)  
 13% - 82% PWM: linear increasing curve  
 82% - 100% PWM: 4.250 1/min (corresponding to max. speed)  
 9% PWM: 800 1/min or 0 1/min (Fan off, coming from 100% PWM)

or:

**Speed control:**

By analog voltage 0 - 10 V (Max. permitted 30 V)

**Information to the curve analog:**

0 V - 1,2 V:	0 1/min
1,3 V:	1.000 1/min (Fan on, coming from von 0 V)
1,3 V - 1,6 V:	1.000 1/min (corresponding to min. speed)
1,6 V - 9,7 V:	linear increasing curve
9,7 V - 10 V:	4.250 1/min (corresponding to max. speed)
1,0 V:	800 1/min or 0 1/min (Fan off, coming from 10 V)

**3.2 Electrical Operating Data**

Measurement conditions: Normal air density = 1,2 kg/m<sup>3</sup>; Temperature 23°C +/- 3°C; Motor axis horizontal; warm-up time before measuring 5 minutes (unless otherwise specified). In the intake and outlet area should not be any solid obstruction within 0,5 m.


$\Delta p = 0$ : corresp. to free air flow (see chapter aerodynamics)  
I: corresp. to arithm. mean current value

Name	Condition		
U Contr. 0001		U Contr. min.: 9,7 V	U Contr. max.: 10,0 V

Features	Condition	Symbol	Values		
Voltage range		U	16 V		30 V
Nominal voltage		$U_N$		24 V	
Power consumption	$\Delta p = 0$	P	31 W	36 W	35 W
Tolerance	U Contr. 0010		+/- 10 %	+/- 10 %	+/- 10 %
Current consumption	$\Delta p = 0$	I	1.950 mA	1.450 mA	1.170 mA
Tolerance	U Contr. 0010		+/- 10 %	+/- 10 %	+/- 10 %
Speed	$\Delta p = 0$	n	4.100 1/min	4.250 1/min	4.250 1/min
Tolerance	U Contr. 0010		+/- 7,5 %	+/- 5 %	+/- 5 %


3.3 Electrical Interface - Output

Tacho type	/2 (open collector)
------------	---------------------

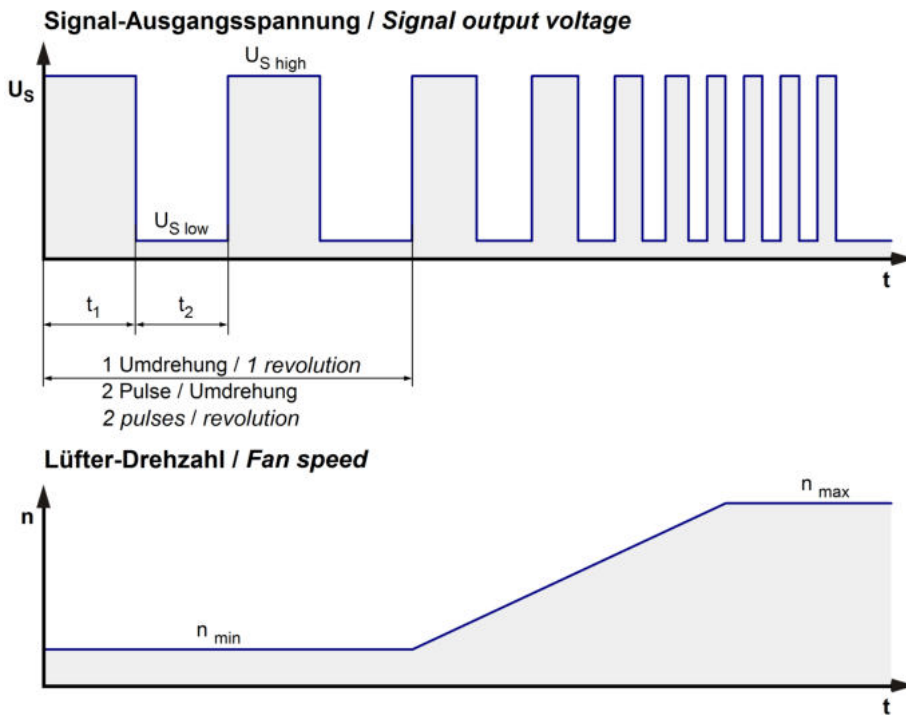

$$R_a = \frac{U_{BS} - U_{S\ low}}{I_{sink}}$$

Lüfter / Fan      Kunde / Customer

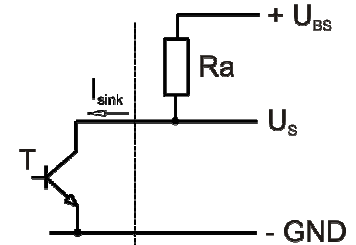

Features	Note	Values
Tacho operating voltage	$U_{BS}$	$\leq 30\ V$
Tacho signal Low	$U_{S\ low}$	$\leq 0,4\ V$
Tacho signal High	$U_{S\ high}$	$\leq 30\ V$
Maximum sink current	$I_{sink}$	$\leq 20\ mA$
External resistor	External resistor $R_a$ from $U_{BS}$ to $U_s$ required. All voltages measured to GND.	
Tacho frequency	$(2 \times n) / 60$	140 Hz @ 4.200 1/min
Tacho isolated from motor	No	
Slew rate		$\Rightarrow 0,5\ V/\mu s$


n = revolutions per minute (1/min)



3.4 Electrical Features


Electronic function	Speed-Controlled	
Reversed polarity protection	Rectifying diode	
Max. residual current at $U_N$	$I_F < 5 \text{ mA}$	
Locked rotor protection	Auto restart	
Locked rotor current at $U_N$	$I_{\text{block}}$	
Clock signal at locked rotor	$t_3 / t_4$ typical: 2,7 s / 10,0 s	
Internal fuse	Littelfuse NANO2 > Very Fast-Acting > 451/453 Series 6,3A / 125V (Art.No.: 045106.3MRL)	
Voltage control *)	Fan turns on at $U_B > 12 \text{ V}$ or $< 13 \text{ V}$ Fan turns off at $U_B < 35 \text{ V}$ or $> 36 \text{ V}$	

\*) This fan has an undervoltage and overvoltage control circuit integrated which turns the motor off if the voltage is out of range.

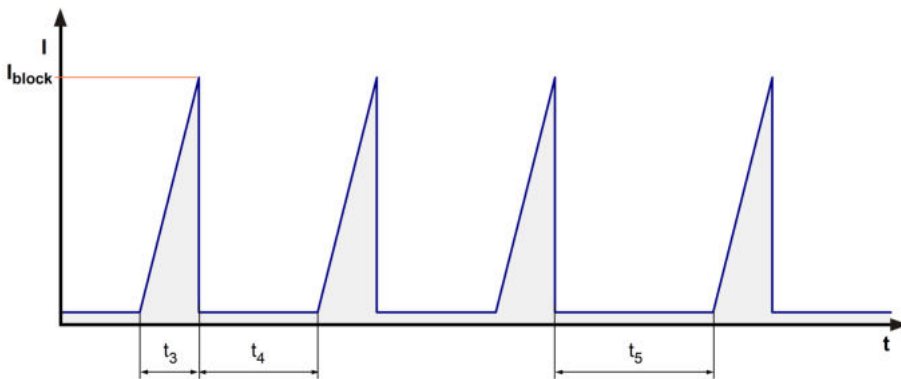


Locked rotor signal t5: 40s


The first timeout t4 is 3s, after that t4 is 10s.  
 After 4 failed start-ups there is an extended timeout of 40s.

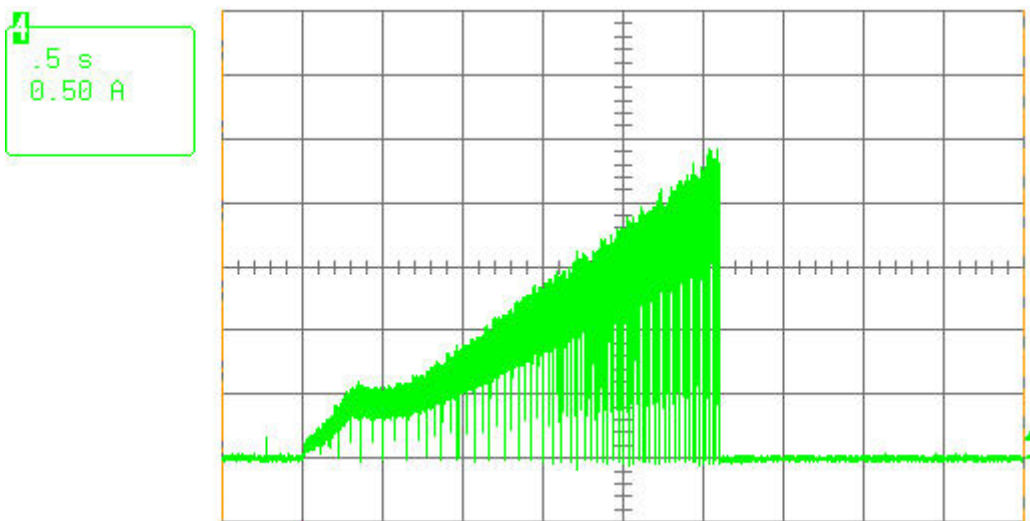

Locked rotor current at 24 V

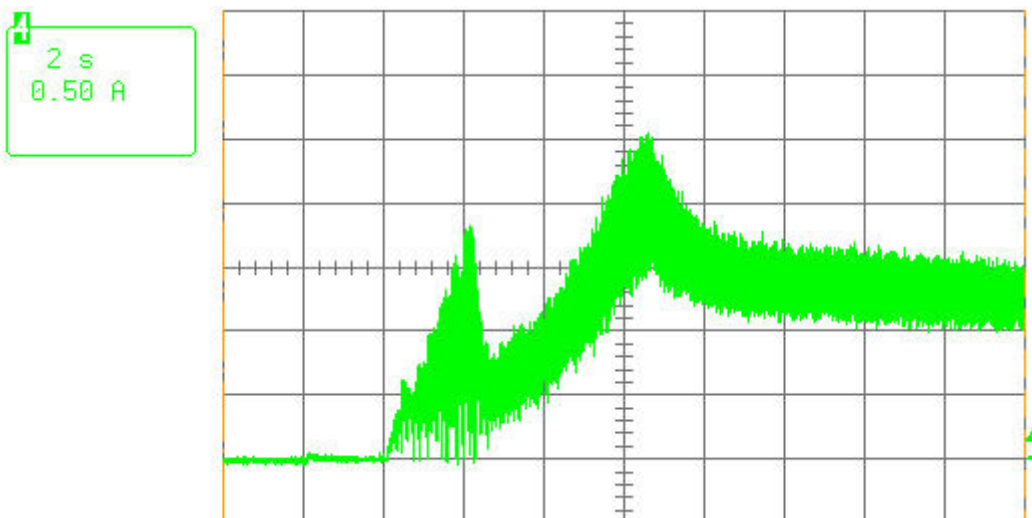

Start-up current at 24 V

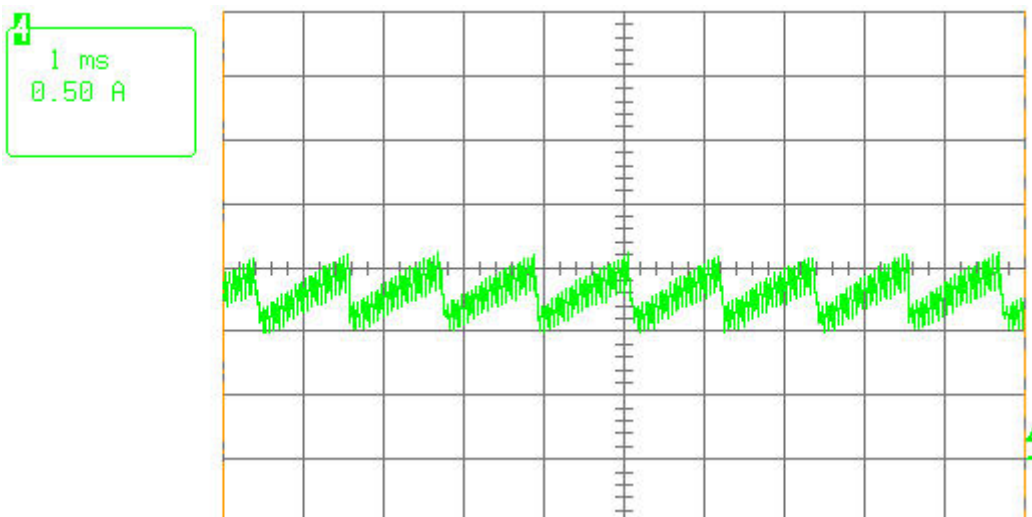


Running current at 24 V

3.5 Aerodynamics

Measurement conditions: Measured with a double chamber intake rig acc. to DIN EN ISO 5801.  
 Normal air density = 1,2 kg/m<sup>3</sup>; Temperature 23°C +/- 3°C;  
 In the intake and outlet area should not be any solid obstruction within 0,5 m. Motor shaft horizontal.  
 The information is only valid under the specified test conditions and may be changed by the installation conditions. If there are deviations from the standard test conditions, the characteristic values must be checked under the installed conditions.

a.) Operation condition:

4.250 1/min at free air flow		U Contr. min.: 9,7 V	U Contr. max.: 10,0 V
Max. free-air flow ( $\Delta p = 0 / \dot{V} = \text{max.}$ )		800 m <sup>3</sup> /h	
Max. static pressure ( $\Delta p = \text{max.} / \dot{V} = 0$ )		430 Pa	

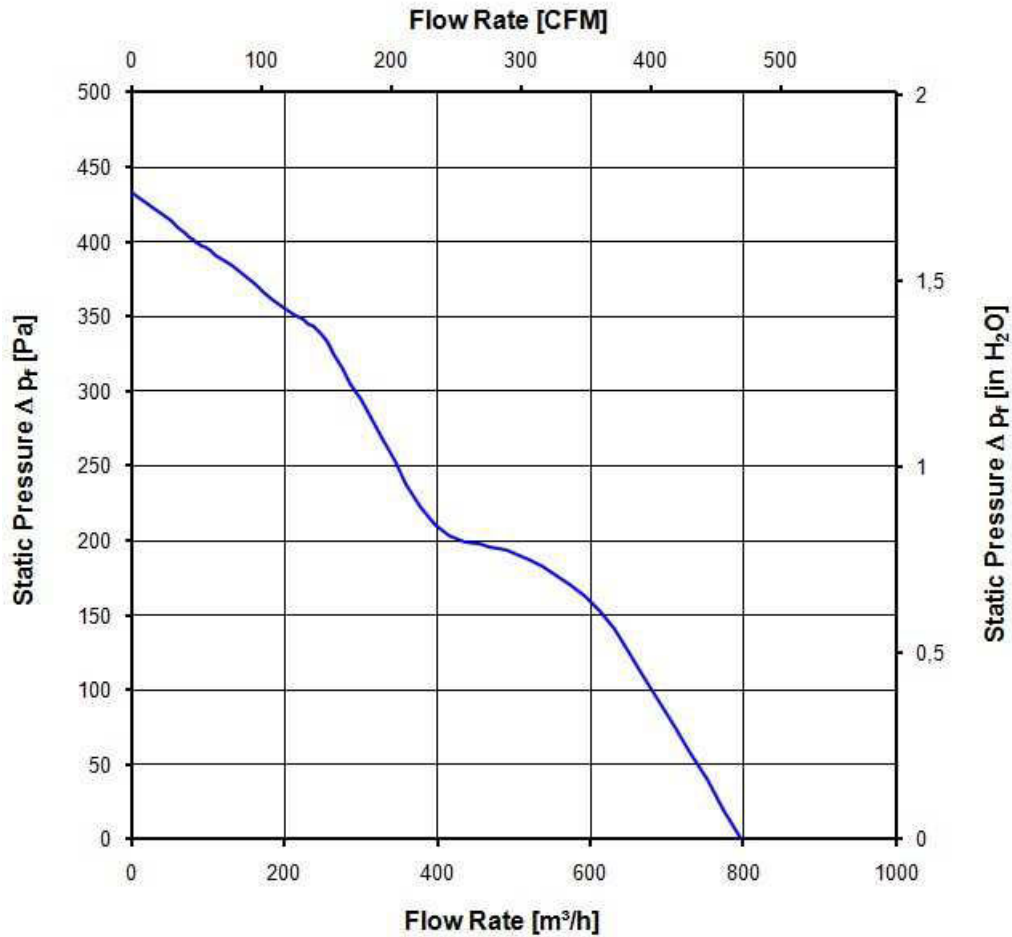

### 3.6 Sound Data

Measurement conditions: Sound pressure level: 1 meter distance between microphone and the air intake.  
Sound power level: Acc. to DIN 45635 part 38 (ISO 10302)  
Measured in a semianchoic chamber with a background noise level of  $L_p(A) < 5 \text{ dB(A)}$   
For further measurement conditions see chapter aerodynamics.

a.) Operation condition:

4.250 1/min at free air flow		U Contr. min.: 9,7 V	U Contr. max.: 10,0 V
------------------------------	--	----------------------	-----------------------

Optimal operating point	688 m <sup>3</sup> /h @ 80 Pa	
Sound power level at the optimal operating point	7,1 bel(A)	
Sound pressure level at free air flow, measured in rubber bands	62,0 dB(A)	

## 4 Environment

### 4.1 General

Min. permitted ambient temperature TU min.	-20 °C	
Max. permitted ambient temperature TU max.	70 °C	
Min. permitted storage temperature TL min.	-40 °C	
Max. permitted storage temperature TL max.	80 °C	

### 4.2 Climatic Requirements

Humidity requirements	humid temperature, cyclic; according to DIN EN 60068-2-38, 10 cycle and condensation water check; according to DIN EN ISO 6270-2, 14 days	
Water exposure	Splash water check IPX4; according to DIN EN 60529 VDE 0470, not certified	
Dust requirements	Dust check IP5X; according to DIN EN 60529 VDE 0470, not certified	
Salt fog requirements	None	

Permitted application area:

The product is for the use in partial sheltered rooms or open, roofed areas. Direct exposure to water is allowed provided that this does not prevent the normal operation. Saline ambient conditions must be avoided.

Pollution degree 3 (according DIN EN 60664-1)

It occurs conductive pollution or dry non-conductive pollution which becomes conductive due to condensation.

## 4.3 Mechanical Requirements

severity level	mobile use		
1	storage / transportation	Random vibration not in use IEC 60068-2-64 Frequency range / ASD  $G_{RMS}$ Axes of vibration Test duration	Random vibration 5 - 20 Hz : $1,0 \text{ m}^2 / \text{s}^3$ 20 - 500 Hz : - 3 dB / Oct 0,91 G 3 3 x 5 h
	storage / transportation	Bump not in use IEC 60068-2-29 Shock spectrum Acceleration Duration Number of bumps (+X, -X, -Y, +Y, -Z, +Z) Total bumps	Bump half sine 18 G 6 ms 100 in each direction 600
	mobile use	Random vibration in use IEC 60068-2-64 Frequency range / ASD  $G_{RMS}$ Axes of vibration Test duration	Random vibration 5 - 20 Hz : $2,0 \text{ m}^2 / \text{s}^3$ 20- 150 Hz : - 3 dB / Oct 0,83 G 3 3 x 5 h
	mobile use	Shock in use IEC 60068-2-27 Shock spectrum Acceleration Duration Number of bumps (+X, -X, -Y, +Y, -Z, +Z) Total bumps	Shock half sine 30 G 6 ms 10 in each direction 60
	mobile use	Bump in use IEC 60068-2-29 Shock spectrum Acceleration Duration Number of bumps (+X, -X, -Y, +Y, -Z, +Z) Total bumps	Bump half sine 5 G 11 ms 100 in each direction 600

**5 Safety****5.1 Electrical Safety**

Dielectric strength DIN EN 60950 (VDE 0805) and DIN EN 60335 (VDE 0700) A.) Type test Measuring conditions: After 48h of storage at 95% R.H. and 25°C. No arcing or breakdown is allowed! All connections together to ground.	500 VAC / 1 Min.	
B.) Routine test Measuring conditions: At indoor climate. No arcing or breakdown is allowed! All connections together to ground.	850 VDC / 1 Sec.	
Isolation resistance Measuring conditions: After 48h of storage at 95% R.H. and 25°C measured with U=500 VDC for 1 min.	RI > 10 MOhm	
Clearance / creepage distance	1,0 mm / 1,2 mm	
Protection class	III	


**5.2 Approval Tests**

CE	EC Declaration of Conformity	Yes
EAC	Eurasian Conformity	Yes
UL	Underwriters Laboratories	Yes / UL audited by CSA according to UL507, Electric Fans
VDE	Association for Electrical, Electronic and Information Technologies	Yes / Approval acc. to EN 60950 (VDE 0805) - Information technology equipment
CSA	Canadian Standards Association	Yes / C22.2 No. 113 Fans and Ventilators
CCC	China Compulsory Certification	Not applicable

**6 Reliability****6.1 General**

Life expectancy L10 at TU = 40 °C	90.000 h	
Life expectancy L10 acc. to IPC 9591 at TU = 40 °C	152. 500 h	

Dimensions and tolerances are given in millimeters unless otherwise stated. All dimensions are given in millimeters unless otherwise stated. All dimensions are given in millimeters unless otherwise stated.

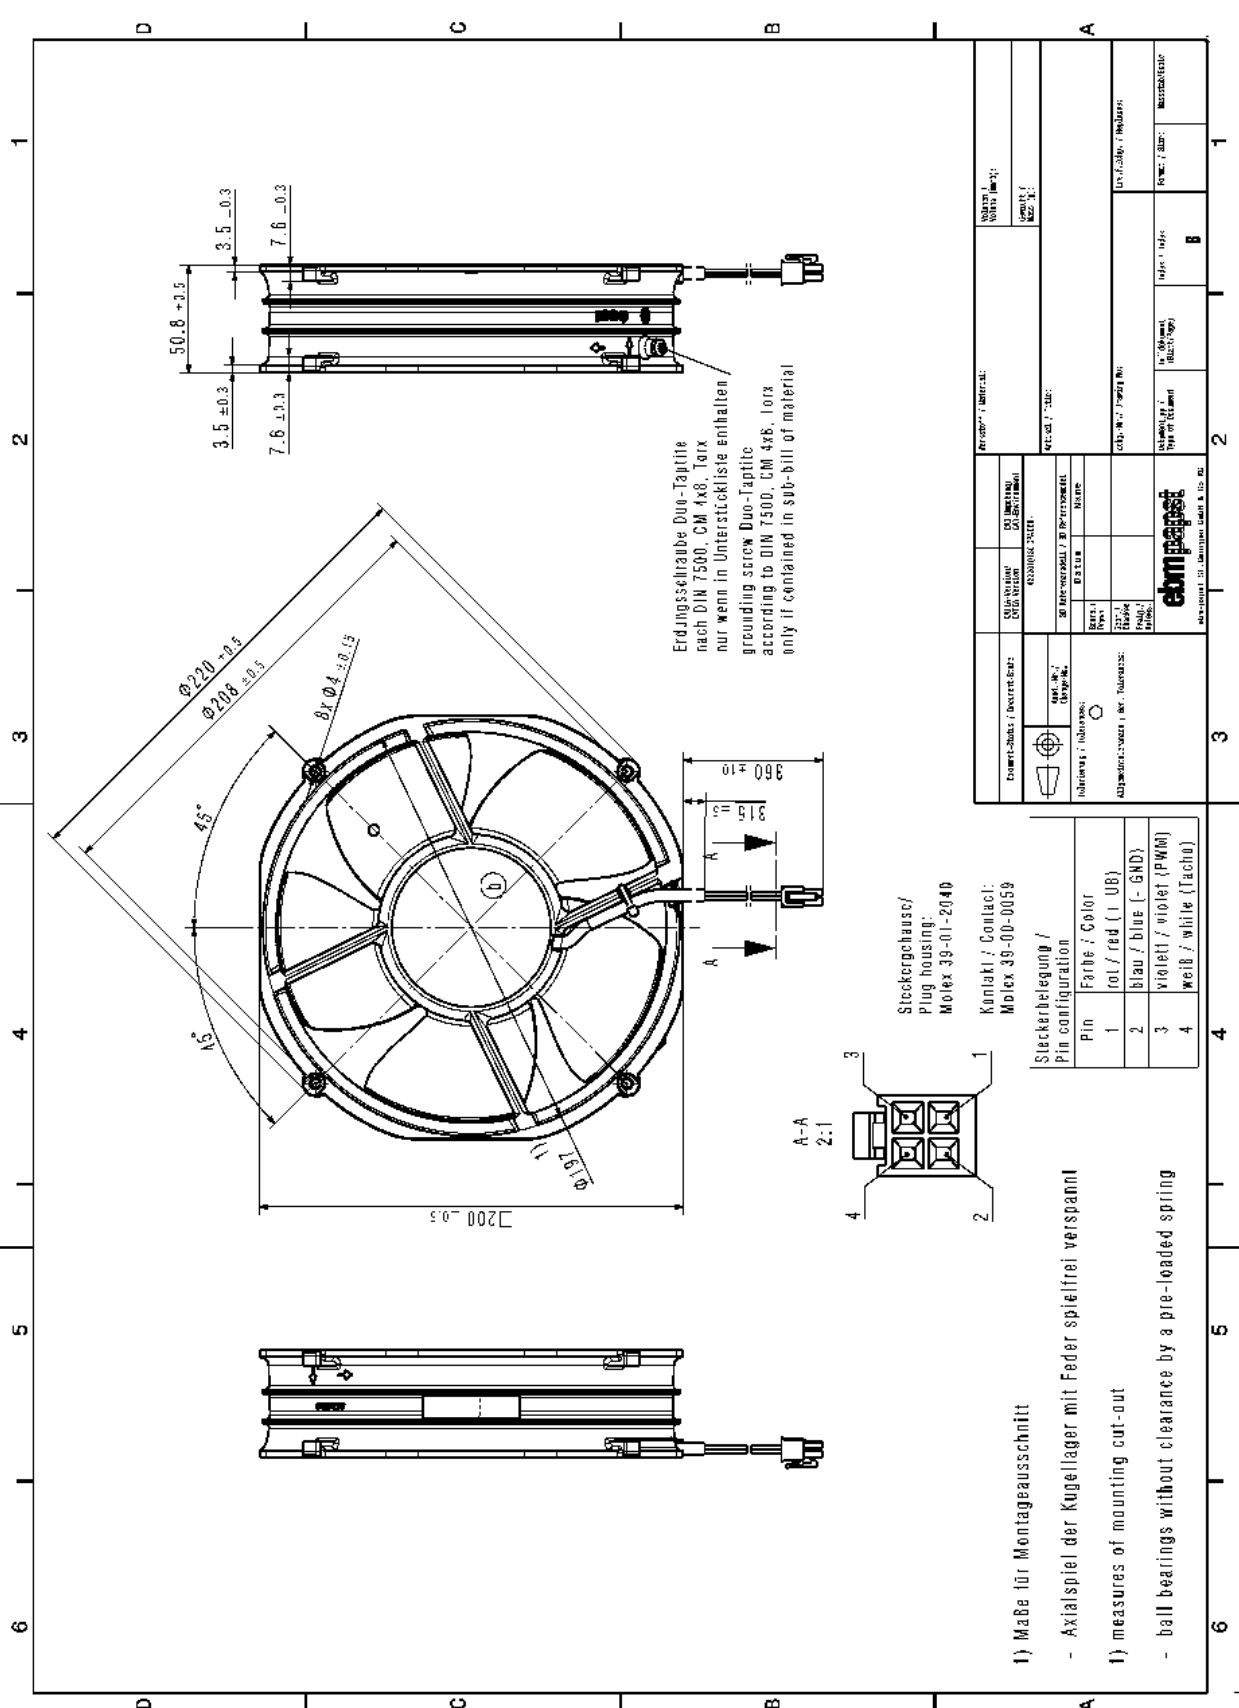

Erdungselthaube Duo-Tapitite nach DIN 7500, CM 4x8, Torx nur wenn in Unterstockliste enthalten grounding screw Duo-Tapitite according to DIN 7500, CM 4x8, Torx only if contained in sub-bill of material

Steckerchausee / Plug housing: Molex 39-01-2040

Kontakt / Contact: Molex 39-00-0059

Pin	Farbe / Color
1	rot / red (1 UB)
2	blau / blue (- GND)
3	violett / violet (PW/M)
4	weiss / white (Tach)

- 1) Maße für Montageausschnitt
- Axialspiel der Kugellager mit Feder spielfrei verspannt
- 1) measures of mounting cut-out
- ball bearings without clearance by a pre-loaded spring

Produkt / Description: <b>STOCKERCHAUSE</b> Molex 39-01-2040		Hersteller / Manufacturer: <b>MOLEX INC.</b>	
Zeichnung / Drawing: <b>39-01-2040</b>		Zeichnung / Drawing: <b>39-01-2040</b>	
Material / Material: <b>BRASS</b>		Material / Material: <b>BRASS</b>	
Farbe / Color: <b>BLAU</b>		Farbe / Color: <b>BLAU</b>	
Lagerung / Mounting: <b>MIT FEDER</b>		Lagerung / Mounting: <b>MIT FEDER</b>	
Typ / Type: <b>STOCKERCHAUSE</b>		Typ / Type: <b>STOCKERCHAUSE</b>	



www.ebmpapst.com