

# 4314/17T

## INDEX

<b>1</b>	<b>General</b> .....	<b>2</b>
<b>2</b>	<b>Mechanics</b> .....	<b>2</b>
2.1	General.....	2
2.2	Connections .....	2
<b>3</b>	<b>Operating Data</b> .....	<b>2</b>
3.1	Operating Data - Electrical Interface - Input.....	3
3.2	Electrical Operating Data .....	4
3.3	Operating Data - Electrical Interface -Output .....	4
3.4	Electrical Features.....	5
3.5	Aerodynamic .....	7
3.6	Sound Data .....	7
<b>4</b>	<b>Environment</b> .....	<b>7</b>
4.1	General.....	7
4.2	Climatic requirements*).....	7
<b>5</b>	<b>Safety</b> .....	<b>7</b>
5.1	Electrical Safety.....	7
5.2	Approval Tests .....	8
<b>6</b>	<b>Reliability</b> .....	<b>8</b>
6.1	General.....	8

**1 General**

Fan type	Fan	
Rotational direction looking at rotor	clockwise	
Airflow direction	Air outlet over struts	
Bearing system	Ball bearing	
Mounting position	any	


**2 Mechanics**

**2.1 General**

Width	119,0 mm	
Height	119,0 mm	
Depth	32,0 mm	
Weight	0,220 kg	
Housing material	Plastic	
Impeller material	Plastic	
Max. torque when mounted across both mounting flanges	wire outlet corner: 20 Ncm remaining corners: 20 Ncm	
Screw size	ISO 4762 - M4 degreased, without an additional brace and without washer	

**2.2 Connections**

Electrical connection	Wires	
Length of lead wire	310 mm	
Tolerance	+ - 10,0 mm	
Wire gauge (AWG)	24	
Insulation diameter	1,55 mm	

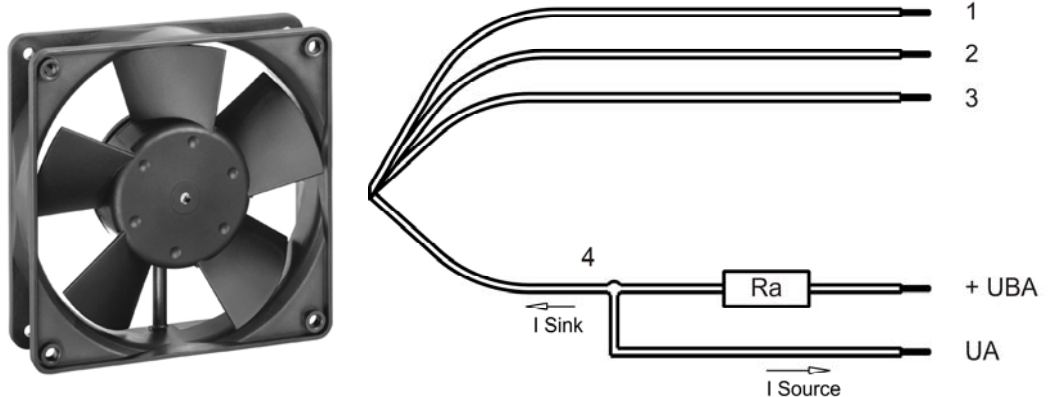

	Colour	Operation
Wire 1	red	+ UB
Wire 2	blue	- GND
Wire 3	violet	NTC:
Wire 4	white	Alarm

The auxiliaries shown on the schematic diagram (which are required for the intended use) are not part of our delivery.

**3 Operating Data**

3.1 Operating Data - Electrical Interface - Input

Control input

cExternal Temperature Sensor

Features

<p><b>Characteristics</b></p>	<table border="1"> <caption>Graph Data: Drehzahl / speed [1/min] vs Umgebungstemperatur / Ambient temperature [°C]</caption> <thead> <tr> <th>Umgebungstemperatur / Ambient temperature [°C]</th> <th>Drehzahl / speed [1/min]</th> </tr> </thead> <tbody> <tr><td>-20</td><td>1400</td></tr> <tr><td>-15</td><td>1400</td></tr> <tr><td>-10</td><td>1400</td></tr> <tr><td>-5</td><td>1400</td></tr> <tr><td>0</td><td>1400</td></tr> <tr><td>5</td><td>1400</td></tr> <tr><td>10</td><td>1400</td></tr> <tr><td>15</td><td>1400</td></tr> <tr><td>20</td><td>1400</td></tr> <tr><td>25</td><td>1400</td></tr> <tr><td>30</td><td>1400</td></tr> <tr><td>35</td><td>1600</td></tr> <tr><td>40</td><td>1800</td></tr> <tr><td>45</td><td>2000</td></tr> <tr><td>50</td><td>2200</td></tr> <tr><td>55</td><td>2800</td></tr> <tr><td>60</td><td>2800</td></tr> <tr><td>65</td><td>2800</td></tr> </tbody> </table>	Umgebungstemperatur / Ambient temperature [°C]	Drehzahl / speed [1/min]	-20	1400	-15	1400	-10	1400	-5	1400	0	1400	5	1400	10	1400	15	1400	20	1400	25	1400	30	1400	35	1600	40	1800	45	2000	50	2200	55	2800	60	2800	65	2800
Umgebungstemperatur / Ambient temperature [°C]	Drehzahl / speed [1/min]																																						
-20	1400																																						
-15	1400																																						
-10	1400																																						
-5	1400																																						
0	1400																																						
5	1400																																						
10	1400																																						
15	1400																																						
20	1400																																						
25	1400																																						
30	1400																																						
35	1600																																						
40	1800																																						
45	2000																																						
50	2200																																						
55	2800																																						
60	2800																																						
65	2800																																						
<p><b>Schematics</b></p>	<p>The schematic shows a fan (Lüfter / Fan) connected to a customer's input (Kunde / Customer). The fan's power supply is connected to + UB and - GND. The customer's input circuit includes an internal reference voltage (+ Interne Ref. / + Internal ref.), a resistor, and an NTC thermistor connected to the fan's input terminal (Eingang / Input).</p>																																						

### 3.2 Electrical Operating Data

Measurement conditions: Normal air density = 1,2 kg/m<sup>3</sup>; Temperature 23°C +/- 3°C; Motor axis horizontal; warm-up time before measuring 5 minutes (unless otherwise specified). In the intake and outlet area should not be any solid obstruction within 0,5 m.

$\Delta p = 0$ : corresp. to free air flow (see section 3.5)  
 I: corresp. to arithm. mean current value

Name	Condition
TU 0001	TU: $\geq 50$ °C
NTC 0001	NTC: $\leq 34$ kOhm

Features	Condition	Symbol	Values		
Voltage range	$\Delta p = 0$	U	18,0 V		32,0 V
Nominal voltage	$\Delta p = 0$	$U_N$		24,0 V	
Power consumption	$\Delta p = 0$	P	2,9 W +/- 25,0 %	4,8 W +/- 25,0 %	5,8 W +/- 25,0 %
Tolerance	TU / NTC: 0001				
Current consumption	$\Delta p = 0$	I	160 mA +/- 25,0 %	200 mA +/- 25,0 %	180 mA +/- 25,0 %
Tolerance	TU / NTC: 0001				
Speed	$\Delta p = 0$	n	2.250 1/min +/- 12,5 %	2.800 1/min +/- 9,0 %	2.800 1/min +/- 9,0 %
Tolerance	TU / NTC: 0001				
Starting current consumption				780 mA	

Name	Condition
TU 0002	TU: $\leq 30$ °C
NTC 0002	NTC: $\geq 78$ kOhm


Features	Condition	Symbol	Values		
Voltage range	$\Delta p = 0$	U	18,0 V		32,0 V
Nominal voltage	$\Delta p = 0$	$U_N$		24,0 V	
Power consumption	$\Delta p = 0$	P	1,2 W +/- 25,0 %	1,6 W +/- 25,0 %	2,2 W +/- 25,0 %
Tolerance	TU / NTC: 0002				
Current consumption	$\Delta p = 0$	I	66 mA +/- 25,0 %	68 mA +/- 25,0 %	68 mA +/- 25,0 %
Tolerance	TU / NTC: 0002				
Speed	$\Delta p = 0$	n	1.400 1/min **)	1.400 1/min **)	1.400 1/min **)
Tolerance	TU / NTC: 0002				

**\*\*)** *Vario Pro*: Unless otherwise specified in the table a general fan speed tolerance applies, relating to the maximum value of the required characteristic curve. Tolerance: +/- 9,0 %

### 3.3 Operating Data - Electrical Interface -Output

Tacho type	None
------------	------


Alarm type	/17 (high = ok, Open collector)
------------	---------------------------------

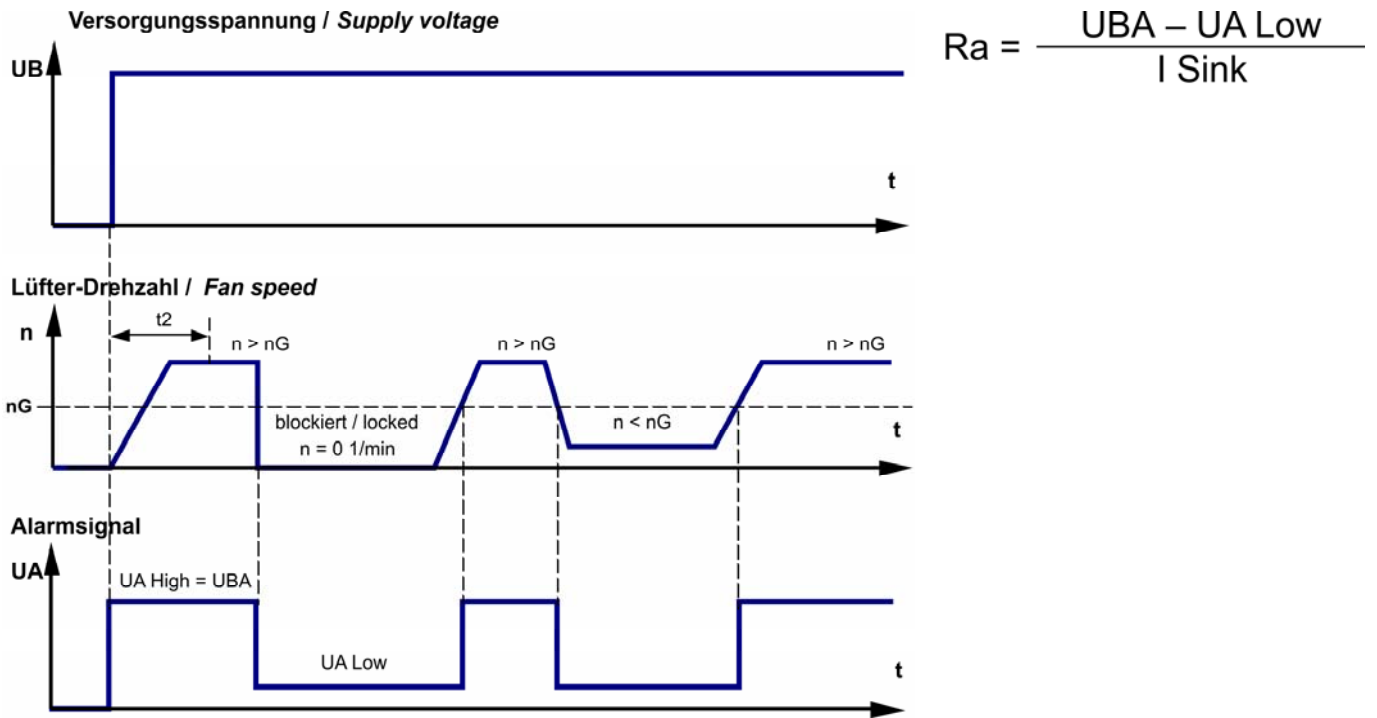

Features	Note	Values
Alarm operating voltage (UBA)		<= 60 V
Alarm signal Low *)	I sink: 2 mA	<= 0,4 V
Alarm signal High *)	I source: 0 mA	60 V
Maximum sink current		<= 20 mA
External resistor	External resistor Ra from UBA to UA required. All voltage measured to GND.	
Alarm start-up delay time (t2)		<= 15 s
Alarm trip speed limit (nG)		1.150 1/min +- 100 1/min
Tolerance		
Alarm at sense failure	Yes	
Alarm latch	No	
Alarm isolated from motor	No	

### 3.4 Electrical Features

Electronic function	Speed-Controlled	
Reversed polarity protection	Rectifying diode	
Max. residual current at $U_n$	$I_F \leq 20 \text{ mA}$	
Locked rotor protection	Auto restart	
Locked rotor current at $U_n$	approx. 780 mA	
Clock signal $t_3/t_4$ at locked rotor	Typical: 0,6 s / 10 s	

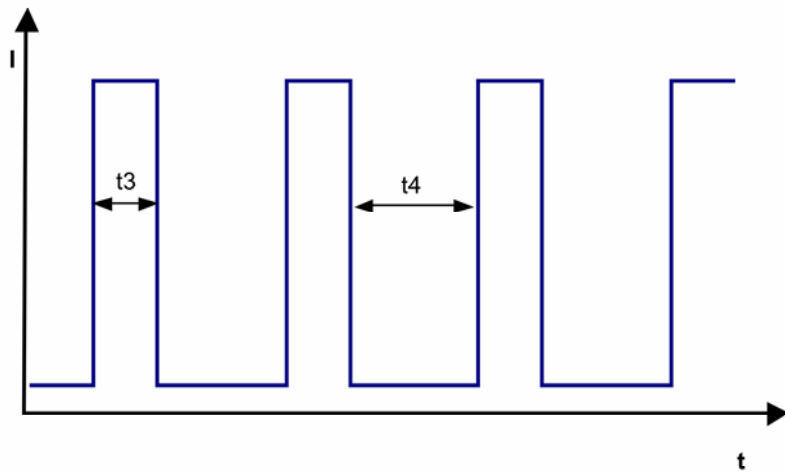

### 3.5 Aerodynamic

Measurement conditions: Measured with a double chamber intake rig acc. to DIN EN ISO 5801.  
 Normal air density = 1,2 kg/m<sup>3</sup>; Temperature 23°C +/- 3°C;  
 In the intake and outlet area should not be any solid obstruction within 0,5 m.

a.) Operation condition:

2.800 1/min at free air flow	TU >= 50 °C NTC: <= 34 kOhm		
------------------------------	--------------------------------	--	--

Max. free-air flow ( $\Delta p = 0 / \dot{V} = \max.$ )	170,0 m <sup>3</sup> /h	
Max. static pressure ( $\Delta p = \max. / \dot{V} = 0$ )	70 Pa	

### 3.6 Sound Data

Measurement conditions: Sound pressure level: 1 Meter distance between microphone and the air intake.  
 Sound power level: Acc. to DIN 45635 part 38 (ISO 10302)  
 Measured in a semianchoic chamber with a background noise level of Lp(A) < 5 dB(A)  
 For further measurement conditions see section 3.5

a.) Operation condition:

2.800 1/min at free air flow	TU >= 50 °C NTC: <= 34 kOhm		
------------------------------	--------------------------------	--	--

Optimal operating point	134,0 m <sup>3</sup> /h @ 17 Pa	
Sound power level at the optimal operating point	5,8 bel(A)	
Sound pressure level at free air flow, measured in rubber bands	45,0 dB(A)	

## 4 Environment

### 4.1 General

Min. permitted ambient temperature TU min.	-20 °C	
Max. permitted ambient temperature TU max.	65 °C	
Min. permitted storage temperature TL min.	-40 °C	
Max. permitted storage temperature TL max.	80 °C	

### 4.2 Climatic requirements\*)

Humidity requirements	humid heat, constant; according to DIN EN 60068-2-78, 14 days	
Water exposure	None	
Radiation exposure	None	
Dust requirements	None	
Salt fog requirements	None	
Harmful gas requirements	None	

\*) Permitted application area:

The product is intended for use in sheltered rooms with controlled temperature and controlled humidity. Directly exposure to water must be avoided.

Pollution degree 1 (according DIN EN 60664-1)

There is either no pollution or it occurs only dry, non-conductive pollution. The pollution has no negative impact. **Safety**

### 5.1 Electrical Safety

Dielectric strength DIN EN 60950 (VDE 0805) and DIN EN 60335 (VDE 0700) A.) Type test Measuring conditions: After 48h of storage at 95% R.H. and 25°C. No arcing or breakdown is allowed! All connections together to ground. B.) Routine test Measuring conditions: At indoor climate. No arcing or breakdown is allowed! All connections together to ground.	500 VAC / 1 Min.  500 VAC / 1 Sec.	
Isolation resistance Measuring conditions: After 48h of storage at 95% R.H. and 25°C measured with U=500 VDC for 1 min.	RI > 10 MOhm	
Air and leakage distances	1,0 mm / 1,2 mm	
Protection class	III	

## 5.2 Approval Tests

CE	Yes
UL	Yes / UL507, Electric Fans
VDE	Yes / Approval acc. to EN 60950 (VDE 0805) - Information technology equipment - Part 1 Safety - Connection to a SELV circuit.
CSA	Yes / C22.2 No. 113-M1984 Fans and Ventilators
CCC	No

The approval tests are observed to:

U approval max.: 28 V @ TU approval max.: 65 °C

## 6 Reliability

### 6.1 General

Life expectancy L10 at TU = 40 °C	65.000 h	
Life expectancy L10 at TU max.	35.000 h	
Life expectancy L10 Delta (40 °C)	132.500 h	