

Product Data Sheet

8315100282

VWCF092DSGHS

AxiACi92R-00282

ebmpapst

engineering a better life



AxiACi92R-00282

INDEX

- 1 General 3**
- 2 Mechanics 3**
 - 2.1 General 3
 - 2.2 Connections 3
- 3 Operating Data 4**
 - 3.1 Electrical Interface - Input 4
 - 3.2 Electrical Operating Data 4
 - 3.3 Electrical Features 5
 - 3.4 Aerodynamics 6
 - 3.5 Sound Data 7
- 4 Environment 8**
 - 4.1 General 8
 - 4.2 Climatic Requirements 8
- 5 Safety 9**
 - 5.1 Electrical Safety 9
 - 5.2 Approval Tests 9
- 6 Reliability 10**
 - 6.1 General 10

1 General

Fan type	Axial
Rotating direction looking at rotor	Counterclockwise
Airflow direction	Air outlet over struts
Bearing system	Ball bearing
Mounting position - shaft	Any

2 Mechanics**2.1 General**

Width	92 mm	
Height	92 mm	
Depth	38 mm	
Diameter	0 mm	
Mass	0,19 kg	
Housing material	Plastic	
Impeller material	Plastic	
Max. torque when mounted across both mounting flanges	Wire outlet corner: 50 Ncm Remaining corners: 80 Ncm	
Screw size	ISO 4762 - M4 degreased, without an additional brace and without washer	

2.2 Connections

Electrical connection	Wires	
Lead wire length	L = 310 mm	
Tolerance	+/- 10 mm	
Tube length	See drawing	
Tolerance		
Wire size (AWG)	22	
Insulation diameter	1,5 mm	
Plug	See drawing	
Contact	See drawing	



Wire	Color	Operation
1	black	L1
2	brown	L2

3 Operating Data

3.1 Electrical Interface - Input

External voltage supply for input and output signals must be SELV conform.

Control input	None
---------------	------


Features

3.2 Electrical Operating Data

Features	Condition	Symbol	Values			
Voltage range		U	100 V			240 V
Tolerance			-10,0 %			
Nominal voltage		U _N		115 V	230 V	
Frequency		f	50 Hz / 60 Hz			
Power consumption	Δp = 0	P	2,1 W			
Tolerance			+ - 20 %			
Current consumption	Δp = 0	I _{RMS}	35 mA	31 mA	22 mA	22 mA
Tolerance			+ - 20 %	+ - 20 %	+ - 20 %	+ - 20 %
Speed	Δp = 0	n	3.500 1/min			
Tolerance			+ - 10 %			

3.3 Electrical Features

Electronic function	Speed-Controlled	
Locked rotor protection	Auto restart	
Clock signal at locked rotor	t_3/t_4 typical: 4,3 s / 10 s	

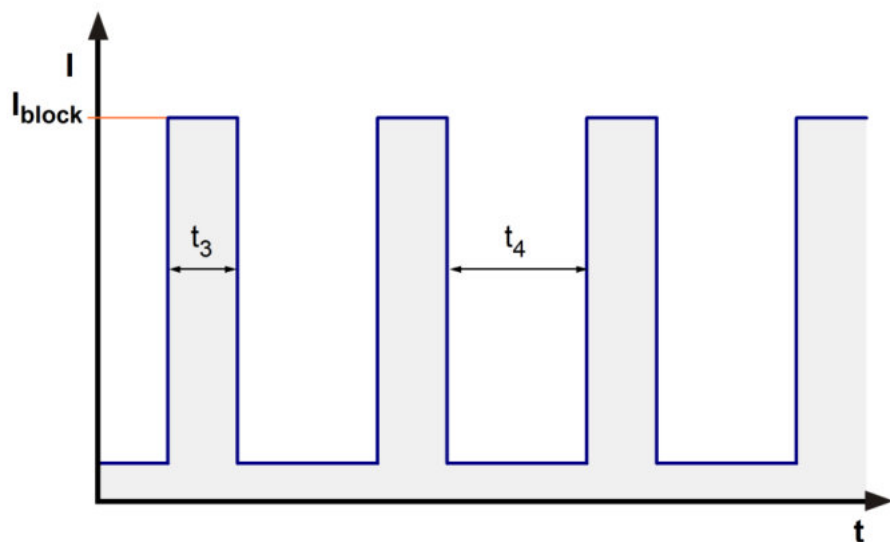

3.4 Aerodynamics


Measurement conditions: Measured with a double chamber intake rig acc. to DIN EN ISO 5801. Normal air density = 1,2 kg/m³; Temperature 23°C +/- 3°C; In the intake and outlet area should not be any solid obstruction within 0,5 m. Motor shaft horizontal.
 The information is only valid under the specified test conditions and may be changed by the installation conditions. If there are deviations from the standard test conditions, the characteristic values must be checked under the installed conditions. Power consumption of the fan motor when operating at normal voltage is shown. Depending on the operating conditions of the application, the power input may be higher.

a) Operation condition: 3.500 1/min at free air flow Frequency: 50 Hz Nominal voltage: 230 V

Max. free-air flow ($\Delta p = 0 / \dot{V} = \text{max.}$)	71 m ³ /h
Max. static pressure ($\Delta p = \text{max.} / \dot{V} = 0$)	93 Pa

b) Operation condition: 3.500 1/min at free air flow Frequency: 60 Hz Nominal voltage: 115 V

Max. free-air flow ($\Delta p = 0 / \dot{V} = \text{max.}$)	71 m ³ /h
Max. static pressure ($\Delta p = \text{max.} / \dot{V} = 0$)	93 Pa

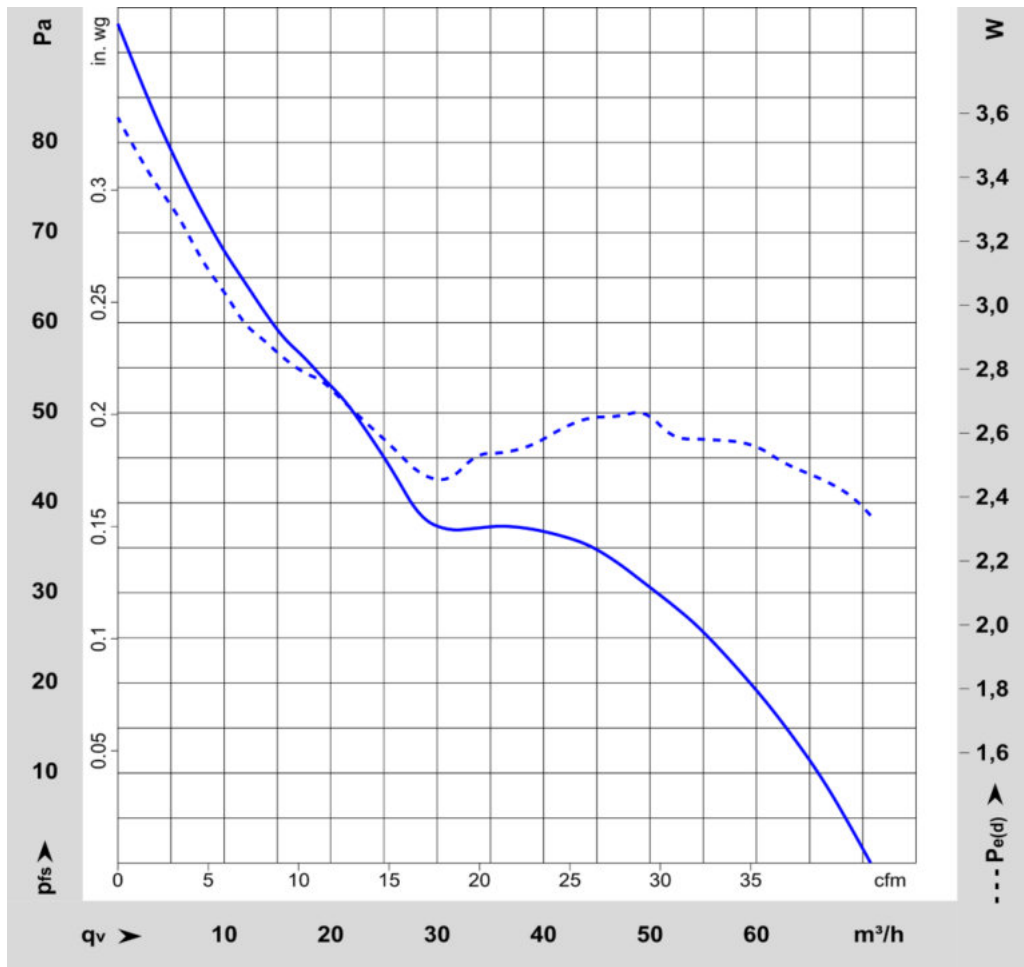

3.5 Sound Data

Measurement conditions: Sound pressure level: 1 meter distance between microphone and the air intake.
 Sound power level: According to DIN 45635 Part 38 (ISO 10302)
 Measured in a semianechoic chamber with a background noise level of $L_p(A) < 5 \text{ dB(A)}$
 For further measurement conditions see chapter aerodynamics.

a) Operation condition:
 3.500 1/min at free air flow Frequency: 50 Hz Nominal voltage: 230 V

Optimal operating point	46 m3/h @ 35 Pa	
Sound power level at the optimal operating point	4,7 bel(A)	
Sound pressure level at free air flow, measured in rubber bands	37 dB(A)	

b) Operation condition:
 3.500 1/min at free air flow Frequency: 60 Hz Nominal voltage: 115 V

Optimal operating point	46 m3/h @ 35 Pa	
Sound power level at the optimal operating point	4,7 bel(A)	
Sound pressure level at free air flow, measured in rubber bands	37 dB(A)	

4 Environment

4.1 General

Min. permitted ambient temperature TU min.	-40 °C	
Max. permitted ambient temperature TU max.	75 °C	
Min. permitted storage temperature TL min.	-40 °C	
Max. permitted storage temperature TL max.	80 °C	

4.2 Climatic Requirements

Humidity requirements	humid heat, cyclic; according to DIN EN 60068-2-30, 6 cycle	
Water exposure	None	
Dust requirements	Dust check; according to DIN EN 60068-2-68, 6g/m2d, 1 day	
Salt fog requirements	None	

Permitted application area:

The product is for the use in sheltered rooms with limited controlled temperature. Occasionally condensed water is allowed. Direct exposure to water must be avoided. Saline ambient conditions must be avoided.

Pollution degree 2 (according DIN EN 60664-1)

It occurs only non-conductive pollution. Occasionally, temporary conductivity caused by condensation occurs.

5 Safety

5.1 Electrical Safety

A verification of thermal conditions (normal and abnormal operation) as well as the protection against electric shock, ingress of solid foreign objects and water has to be done in conjunction with the appliance.

Test voltage HV type test	3000 V
Unit test voltage	VAC
Time type test HV	1 s
Insulation resistance	RI > 10 MOhm
Protection class	built-in fan

5.2 Approval Tests

CE	EC Declaration of Conformity	Yes
EAC	Eurasian Conformity	Yes
UL	Underwriters Laboratories	Yes / UL507, Electric Fans E38324
VDE	Association for Electrical, Electronic and Information Technologies	Yes / Approval acc. to EN 60335 (VDE 0700) - Safety for household and similar electrical appliances
CSA	Canadian Standards Association	No
CCC	China Compulsory Certification	Yes / GB 12350 Safety Requirements for small Power Motors

According to the guidelines on the application of Directive 2006/95/EC, chapter III: Scope of the "low voltage" directive, paragraph: Are "components" included in the scope? the following has to be applied:

However, some types of electrical devices, designed and manufactured for being uses as basic components to be incorporated into other electrical equipment, are such that their safety to a very large extent depends on how they are integrated into the final product and the overall characteristics of the final product. These basic components include electronic and certain other components.


Taking into account these objectives of the "Low Voltage" Directive, such basic components, the safety of which can only, to a very large extend, be assessed taking into account, how they are incorporated and for which a risk assessment cannot be undertaken, then they are not covered as such by the Directive. In particular, they must not be CE marked unless covered by other Community legislation that requires CE marking.

6 Reliability

6.1 General

Life expectancy L10 at TU = 40 °C	65.000 h	
Life expectancy L10 at TU max.	25.000 h	
Life expectancy L10 acc. to IPC 9591 at TU = 40 °C	110.000 h	

The construction, identification and lead length of this device must be as specified in the drawing and the manufacturer is responsible for the correct identification and lead length of the device. The manufacturer must ensure that the device is correctly identified and lead length is as specified in the drawing. The manufacturer must ensure that the device is correctly identified and lead length is as specified in the drawing. The manufacturer must ensure that the device is correctly identified and lead length is as specified in the drawing.

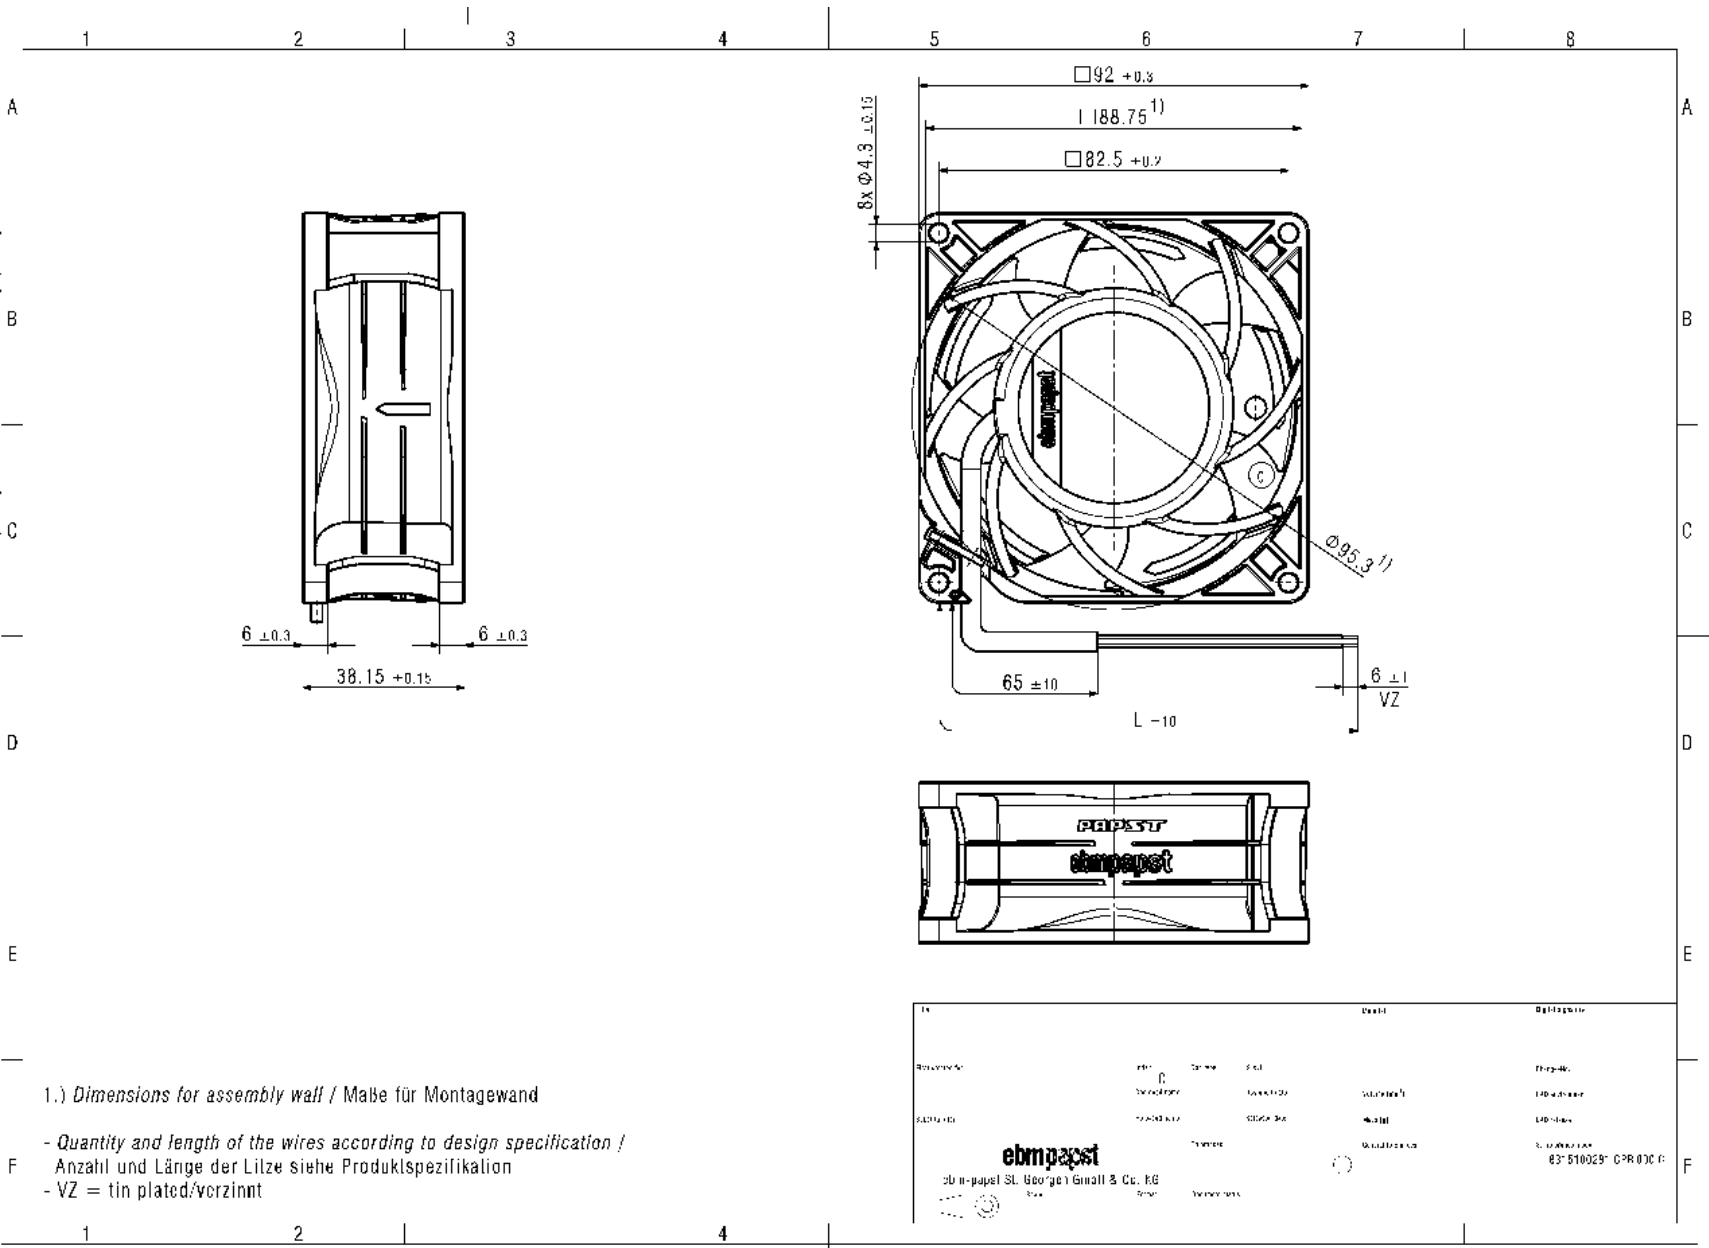

1.) Dimensions for assembly wall / Maße für Montagewand

- Quantity and length of the wires according to design specification / Anzahl und Länge der Litze siehe Produktspezifikation
- VZ = tin plated/verzinkt

<p>ebmpapst ebm-papst SL, George & Co., KG 73734 Bietigheim-Bissingen</p>	<p>China</p> <p>Germany</p> <p>USA</p> <p>UK</p> <p>France</p> <p>Spain</p> <p>Italy</p> <p>Japan</p> <p>India</p> <p>South Africa</p> <p>Canada</p> <p>Mexico</p> <p>Brazil</p> <p>Argentina</p> <p>Chile</p> <p>Colombia</p> <p>Costa Rica</p> <p>Cuba</p> <p>Dominican Republic</p> <p>Ecuador</p> <p>El Salvador</p> <p>Guatemala</p> <p>Honduras</p> <p>Indonesia</p> <p>Israel</p> <p>Malaysia</p> <p>Maldives</p> <p>Nicaragua</p> <p>Pakistan</p> <p>Panama</p> <p>Paraguay</p> <p>Peru</p> <p>Poland</p> <p>Russia</p> <p>Saudi Arabia</p> <p>Singapore</p> <p>Slovakia</p> <p>Slovenia</p> <p>South Korea</p> <p>Taiwan</p> <p>Tanzania</p> <p>Thailand</p> <p>Turkey</p> <p>Ukraine</p> <p>USA</p> <p>Vietnam</p>	<p>Germany</p> <p>USA</p> <p>UK</p> <p>France</p> <p>Spain</p> <p>Italy</p> <p>Japan</p> <p>India</p> <p>South Africa</p> <p>Canada</p> <p>Mexico</p> <p>Brazil</p> <p>Argentina</p> <p>Chile</p> <p>Colombia</p> <p>Costa Rica</p> <p>Cuba</p> <p>Dominican Republic</p> <p>Ecuador</p> <p>El Salvador</p> <p>Guatemala</p> <p>Honduras</p> <p>Indonesia</p> <p>Israel</p> <p>Malaysia</p> <p>Maldives</p> <p>Nicaragua</p> <p>Pakistan</p> <p>Panama</p> <p>Paraguay</p> <p>Peru</p> <p>Poland</p> <p>Russia</p> <p>Saudi Arabia</p> <p>Singapore</p> <p>Slovakia</p> <p>Slovenia</p> <p>South Korea</p> <p>Taiwan</p> <p>Tanzania</p> <p>Thailand</p> <p>Turkey</p> <p>Ukraine</p> <p>USA</p> <p>Vietnam</p>
---	--	---