

D3G250-EE51-11

EC centrifugal fan

forward-curved, dual-intake

with housing (flange)



ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

sales@fansco.com

www.fansco.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

| | | |
|--------------------------|-------------------|------------|
| Type | D3G250-EE51-11 | |
| Motor | M3G112-EA | |
| Phase | | 1~ |
| Nominal voltage | VAC | 230 |
| Nominal voltage range | VAC | 200 .. 277 |
| Frequency | Hz | 50/60 |
| Method of obtaining data | | ml |
| Speed (rpm) | min ⁻¹ | 1270 |
| Power consumption | W | 680 |
| Current draw | A | 3.1 |
| Min. back pressure | Pa | 100 |
| Min. back pressure | in. wg | 0.4 |
| Min. ambient temperature | °C | -25 |
| Max. ambient temperature | °C | 40 |

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011

| | | Actual | Req. 2015 |
|-----------------------------------|---|--------|-----------|
| 01 Overall efficiency η_{es} | % | 48.7 | 34.6 |
| 02 Measurement category | | A | |
| 03 Efficiency category | | Static | |
| 04 Efficiency grade N | | 58.1 | 44 |
| 05 Variable speed drive | | Yes | |

Data obtained at optimum efficiency level.

The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

| | | |
|-------------------------------|-------------------|------|
| 09 Power consumption P_{ed} | kW | 0.33 |
| 09 Air flow q_v | m ³ /h | 1500 |
| 09 Pressure increase p_{fs} | Pa | 347 |
| 10 Speed (rpm) n | min ⁻¹ | 1395 |
| 11 Specific ratio* | | 1.00 |

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

LU-163698



EC centrifugal fan

forward-curved, dual-intake

with housing (flange)

Technical description


| | |
|---|--|
| Weight | 14.7 kg |
| Size | 250 mm |
| Motor size | 112 |
| Rotor surface | Painted black |
| Electronics housing material | Die-cast aluminum |
| Impeller material | Sheet steel, galvanized |
| Housing material | Sheet steel, galvanized |
| Motor suspension | Motor mounted on brackets for one-sided vibration damping |
| Direction of rotation | Clockwise, viewed toward rotor |
| Degree of protection | IP54 |
| Insulation class | "B" |
| Moisture (F) / Environmental (H) protection class | H1 |
| Max. permitted ambient temp. for motor (transport/storage) | +80 °C |
| Min. permitted ambient temp. for motor (transport/storage) | -40 °C |
| Installation position | Shaft horizontal |
| Condensation drainage holes | None |
| Mode | S1 |
| Motor bearing | Ball bearing |
| Technical features | <ul style="list-style-type: none"> - Output 10 VDC, max. 10 mA - Alarm relay - Motor current limitation - PFC, active - Soft start - Control input 0-10 VDC - Control interface with SELV potential safely disconnected from supply - Thermal overload protection for electronics/motor - Line undervoltage / phase failure detection |
| EMC immunity to interference | According to EN 61000-6-2 (industrial environment) |
| EMC circuit feedback | According to EN 61000-3-2/3 |
| EMC interference emission | According to EN 61000-6-4 (industrial environment) |
| Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system) | <= 3.5 mA |
| Motor protection | Thermal overload protector (TOP) internally connected |
| With cable | Variable |
| Protection class | I (with customer connection of protective earth) |
| Conformity with standards | EN 61800-5-1; CE |
| Approval | EAC |



EC centrifugal fan

forward-curved, dual-intake
with housing (flange)

Product drawing

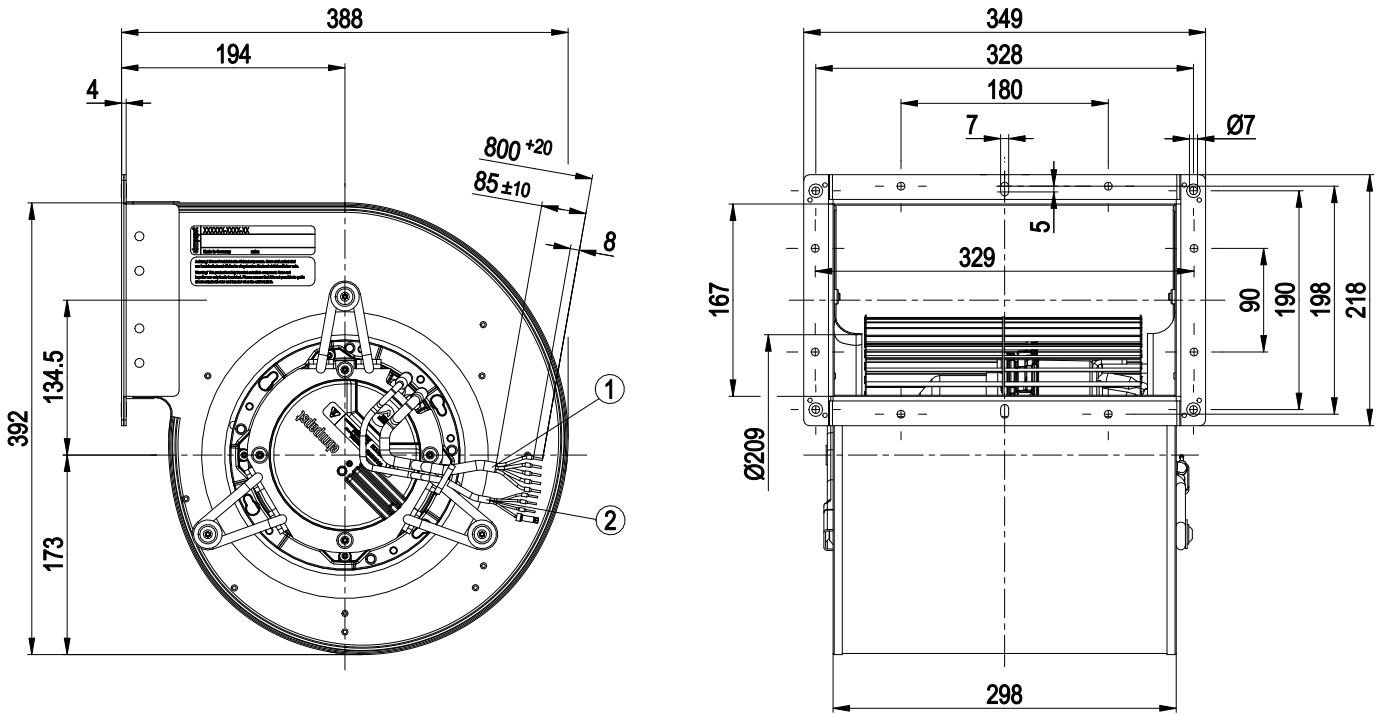

Cable length measured from electronics housing: 800+20 mm

| | |
|---|---|
| 1 | Cable PVC AWG18, 5x crimped ferrules |
| 2 | Cable PVC AWG22, 3x ferrules 1x end connector crimped |




EC centrifugal fan

forward-curved, dual-intake

with housing (flange)

Connection diagram

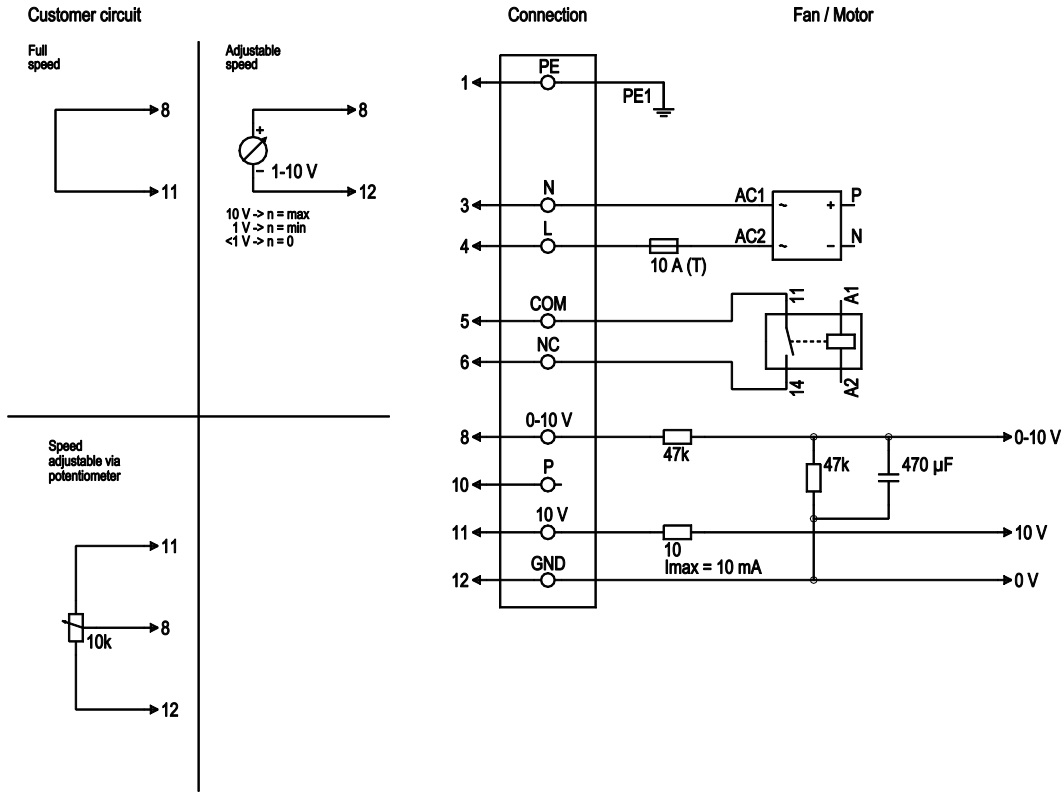

| No. | Conn. | Designation | Color | Function/assignment |
|-----|-------|-------------|--------------|---|
| 1 | 1 | PE | green/yellow | Protective earth |
| 1 | 3 | N | blue | Power supply, neutral conductor, 50/60 Hz |
| 1 | 4 | L | black | Power supply, phase, 50/60 Hz |
| 1 | 5 | COM | white 1 | Floating status contact, break for failure (2 A, max. 250 VAC, min. 10 mA, AC1) |
| 1 | 6 | NC | white 2 | Floating status contact, break for failure |
| 2 | 8 | 0-10 V | yellow | Control input, set value 0-10 VDC, impedance 100 kΩ, SELV |
| 2 | 10 | P | orange | not used |
| 2 | 11 | 10 VDC | red | Voltage output 10 VDC (±3%), max. 10 mA, power supply for external devices (e.g. potentiometer), SELV |
| 2 | 12 | GND | blue | Reference ground for control interface, SELV |




EC centrifugal fan

forward-curved, dual-intake

with housing (flange)

Curves: Air performance 50 Hz

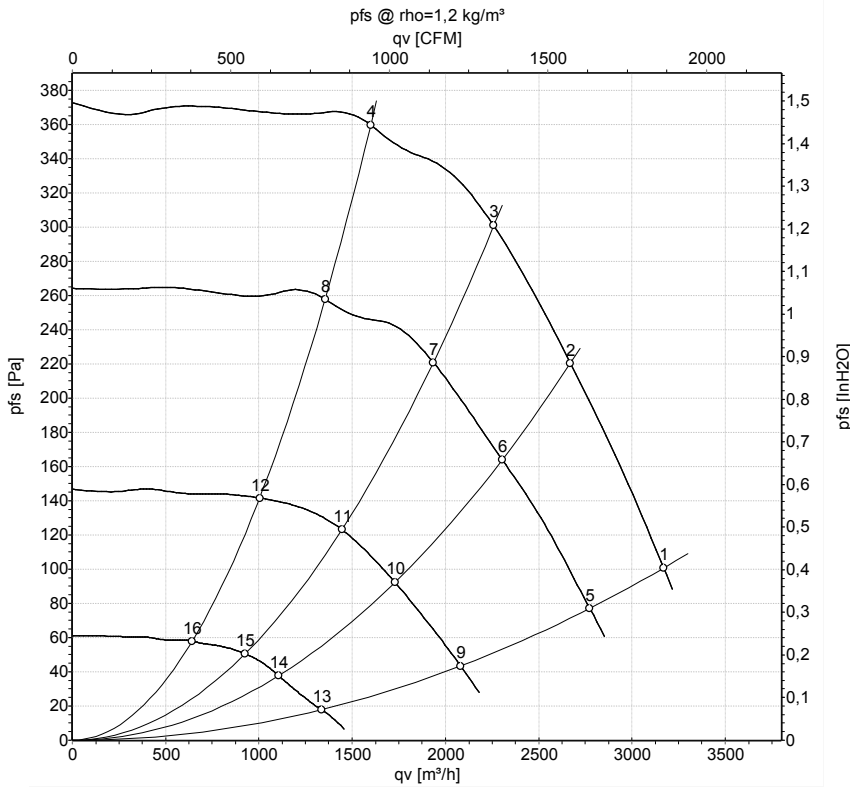

Measurement: LU-163698-1
 Measurement: LU-163755-1
 Measurement: LU-163756-1
 Measurement: LU-163770-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

| | U | f | n | P _{ed} | I | LpA _{in} | LwA _{in} | q _v | p _{fs} | q _v | p _{fs} |
|----|-----|----|-------------------|-----------------|------|-------------------|-------------------|-------------------|-----------------|----------------|-----------------|
| | V | Hz | min ⁻¹ | W | A | dB(A) | dB(A) | m ³ /h | Pa | cfm | in. wg |
| 1 | 230 | 50 | 1270 | 680 | 3.10 | 67 | 82 | 3170 | 100 | 1865 | 0.40 |
| 2 | 230 | 50 | 1315 | 544 | 2.51 | 64 | 79 | 2670 | 220 | 1570 | 0.88 |
| 3 | 230 | 50 | 1345 | 470 | 2.20 | 62 | 77 | 2260 | 300 | 1330 | 1.20 |
| 4 | 230 | 50 | 1390 | 353 | 1.66 | 59 | 74 | 1600 | 360 | 940 | 1.45 |
| 5 | 230 | 50 | 1120 | 428 | 2.01 | | | 2775 | 77 | 1630 | 0.31 |
| 6 | 230 | 50 | 1145 | 360 | 1.70 | | | 2305 | 164 | 1355 | 0.66 |
| 7 | 230 | 50 | 1160 | 306 | 1.44 | | | 1935 | 221 | 1140 | 0.89 |
| 8 | 230 | 50 | 1200 | 229 | 1.12 | | | 1355 | 258 | 800 | 1.04 |
| 9 | 230 | 50 | 850 | 199 | 0.96 | | | 2080 | 43 | 1225 | 0.17 |
| 10 | 230 | 50 | 865 | 164 | 0.79 | | | 1730 | 92 | 1020 | 0.37 |
| 11 | 230 | 50 | 880 | 141 | 0.68 | | | 1445 | 123 | 850 | 0.49 |
| 12 | 230 | 50 | 885 | 108 | 0.54 | | | 1005 | 142 | 590 | 0.57 |
| 13 | 230 | 50 | 560 | 62 | 0.38 | | | 1335 | 18 | 785 | 0.07 |
| 14 | 230 | 50 | 565 | 52 | 0.33 | | | 1105 | 38 | 650 | 0.15 |
| 15 | 230 | 50 | 575 | 49 | 0.31 | | | 925 | 51 | 545 | 0.20 |
| 16 | 230 | 50 | 585 | 43 | 0.27 | | | 640 | 58 | 380 | 0.23 |

U = Voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
 q_v = Air flow · p_{fs} = Pressure increase

