

D4E225-DH01-01

AC centrifugal fan

forward-curved, dual-intake
with housing (large flange)



ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

sales@fansco.com

www.fansco.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Type	D4E225-DH01-01		
Motor	M4E094-LA		
Phase		1~	1~
Nominal voltage	VAC	230	230
Frequency	Hz	50	60
Method of obtaining data		ml	ml
Valid for approval/standard		CE	CE
Speed (rpm)	min ⁻¹	1230	1370
Power consumption	W	1060	1120
Current draw	A	5.38	5.4
Capacitor	µF	10	10
Capacitor voltage	VDB	450	500
Min. back pressure	Pa	100	250
Min. back pressure	in. wg	0.4	1
Min. ambient temperature	°C	-40	-40
Max. ambient temperature	°C	55	45

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011

		Actual	Req. 2015			
01 Overall efficiency η_e	%	40.9	40.9	09 Power consumption P_e	kW	0.52
02 Measurement category		B		09 Air flow q_v	m ³ /h	2020
03 Efficiency category		Total		09 Pressure increase p_f	Pa	371
04 Efficiency grade N		49	49	10 Speed (rpm) n	min ⁻¹	1415
05 Variable speed drive		No		11 Specific ratio*		1.00

Data obtained at optimum efficiency level.
The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

* Specific ratio = $1 + p_f / 100\,000\text{ Pa}$

LU-41783



AC centrifugal fan

forward-curved, dual-intake
with housing (large flange)

Technical description


Weight	16.5 kg
Fan size	225 mm
Impeller material	Sheet steel, hot-dip galvanized
Housing material	Sheet steel, hot-dip galvanized
Motor suspension	Motor vibration-damped on both sides
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP10; (Motor); installation- and position-dependent
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	F0
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Any
Condensation drainage holes	None, open rotor
Mode	S1
Motor bearing	Ball bearing
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Motor protection	Thermal overload protector (TOP) with basic insulation
With cable	Axial
Protection class	I (with customer connection of protective earth)
Motor capacitor according to EN 60252-1 in safety protection class	S0
Conformity with standards	EN 60034-1 (2004); CE
Approval	CCC; EAC



AC centrifugal fan


forward-curved, dual-intake
with housing (large flange)

Product drawing

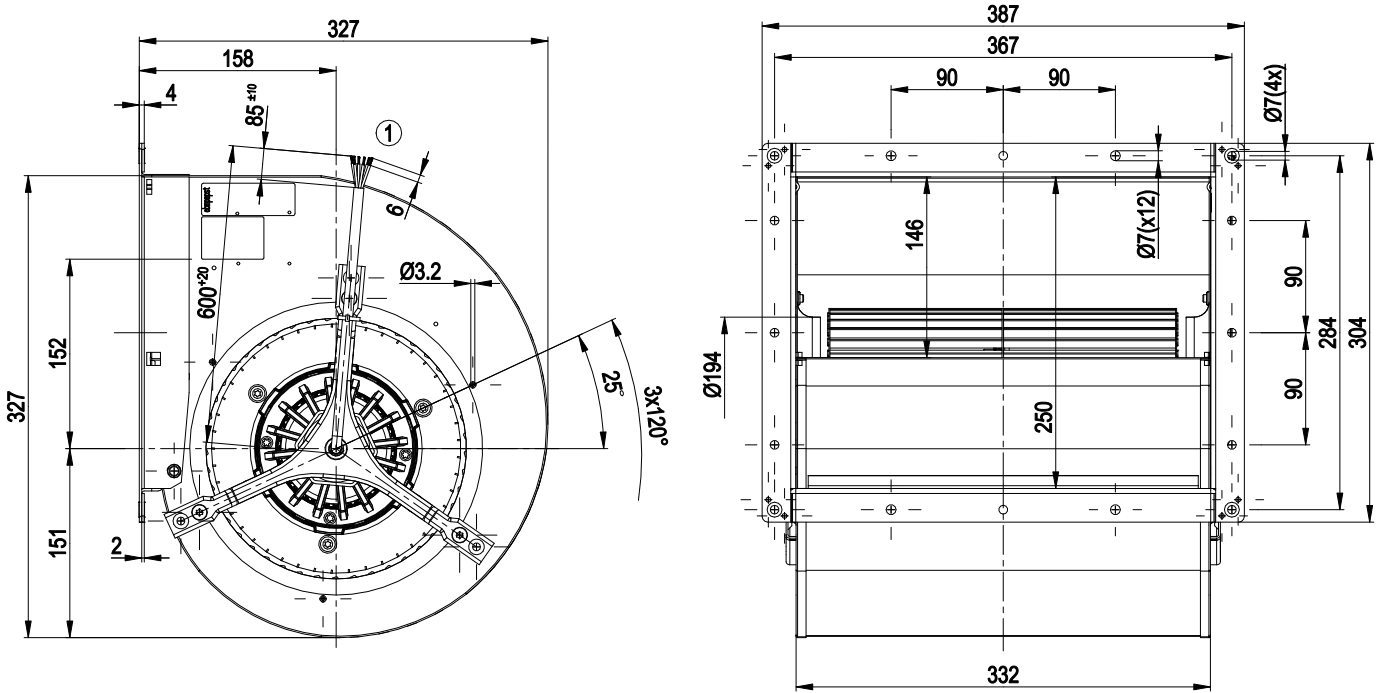

1 Cable PFA 0.5 mm², 6x crimped splices

Connection diagram




U1	blue	Z	brown	U2	black
PE	green/yellow	TOP	2x white		



AC centrifugal fan

forward-curved, dual-intake
with housing (large flange)

Curves: Air performance 50 Hz

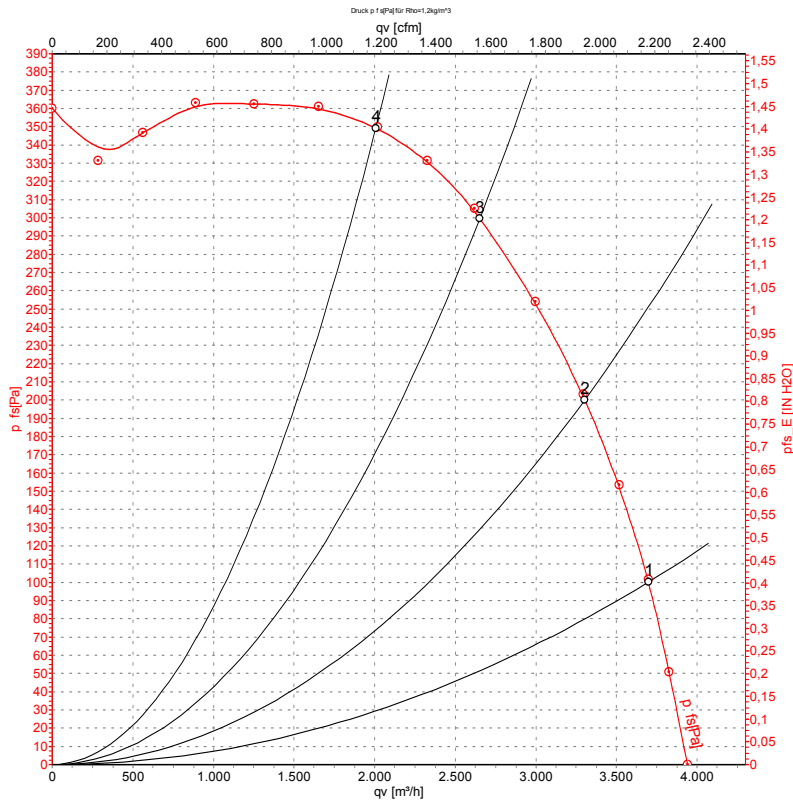

Measurement: LU-41783-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _e	I	q _v	p _{1s}	q _v	p _{1s}
	V	Hz	min ⁻¹	W	A	m ³ /h	Pa	cfm	in. wg
1	230	50	1230	1060	5.38	3700	100	2175	0.40
2	230	50	1310	858	4.39	3300	200	1945	0.80
3	230	50	1375	661	3.55	2650	300	1560	1.20
4	230	50	1415	519	3.02	2005	350	1180	1.41


U = Power supply · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · q_v = Air flow · p_{1s} = Pressure increase



AC centrifugal fan

forward-curved, dual-intake
with housing (large flange)

Curves: Air performance 60 Hz

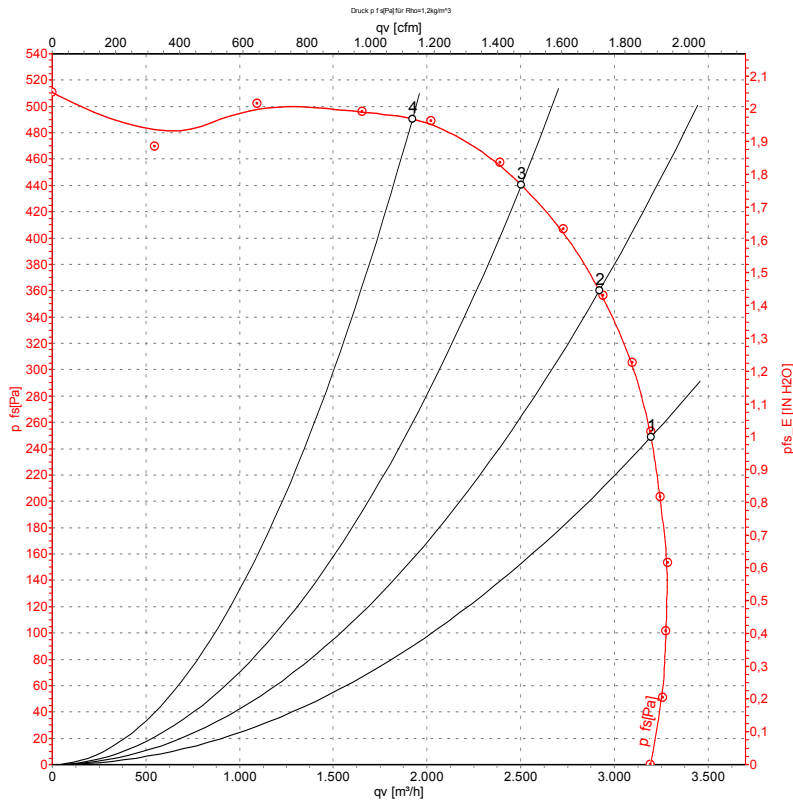

Measurement: LU-41784-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _e	I	q _v	P _{fs}	q _v	P _{fs}
	V	Hz	min ⁻¹	W	A	m ³ /h	Pa	cfm	in. wg
1	230	60	1370	1120	5.40	3195	250	1880	1.00
2	230	60	1505	958	4.51	2920	360	1720	1.45
3	230	60	1595	805	3.70	2505	440	1475	1.77
4	230	60	1670	640	2.90	1920	490	1130	1.97

U = Power supply · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · q_v = Air flow · P_{fs} = Pressure increase

