

ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

sales@fansco.com

www.fansco.com

Limited partnership · Headquarters Mulfingen

County court Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

County court Stuttgart · HRB 590142

Nominal data

| | | |
|--------------------------|-----------------------|------------|
| Type | K3G280-PR04-I2 | |
| Motor | M3G084-DF | |
| Phase | | 1~ |
| Nominal voltage | VAC | 230 |
| Nominal voltage range | VAC | 200 .. 277 |
| Frequency | Hz | 50/60 |
| Type of data definition | | ml |
| Speed (rpm) | min ⁻¹ | 3000 |
| Power input | W | 750 |
| Current draw | A | 3.3 |
| Min. ambient temperature | °C | -25 |
| Max. ambient temperature | °C | 45 |

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations

Data according to ErP directive

| | | Actual | Request 2015 |
|-----------------------------------|---|--------|--------------|
| 01 Overall efficiency η_{es} | % | 67.6 | 50 |
| 02 Measurement category | | A | |
| 03 Efficiency category | | Static | |
| 04 Efficiency grade N | | 79.6 | 62 |
| 05 Variable speed drive | | Yes | |

Data definition with optimum efficiency.

The ErP data is determined using a motor-impeller combination in a standardised measurement configuration.

| | | |
|--------------------------------|-------------------|------|
| 09 Power input P_{ed} | kW | 0.72 |
| 09 Air flow q_v | m ³ /h | 2400 |
| 09 Pressure increase p_{fs} | Pa | 665 |
| 10 Speed (rpm) n | min ⁻¹ | 2990 |
| 11 Specific ratio [*] | | 1.01 |

^{*} Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$


LU-173985



Technical features


| | |
|---|---|
| Mass | 9.1 kg |
| Size | 280 mm |
| Surface of rotor | Coated in black |
| Material of electronics housing | Die-cast aluminium |
| Material of impeller | PP plastic |
| Material of mounting plate | Sheet steel, galvanised |
| Material of support bracket | Steel, coated in black |
| Material of inlet nozzle | Sheet steel, galvanised |
| Number of blades | 6 |
| Direction of rotation | Clockwise, seen on rotor |
| Type of protection | IP 55 |
| Insulation class | "F" |
| Humidity (F)/environmental protection class (H) | H1 |
| Max. permissible ambient motor temp. (transp./ storage) | + 80 °C |
| Min. permissible ambient motor temp. (transp./storage) | - 40 °C |
| Mounting position | Shaft horizontal or rotor on bottom; rotor on top on request |
| Condensate discharge holes | Rotor-side |
| Operation mode | S1 |
| Motor bearing | Ball bearing |
| Technical features | <ul style="list-style-type: none"> - Output 10 VDC, max. 10 mA - Operation and alarm display - Alarm relay - Integrated PID controller - Output limit - Motor current limit - PFC, active - RS485 MODBUS RTU - Soft start - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from the mains - Over-temperature protected electronics / motor - Line undervoltage / phase failure detection |
| EMC interference immunity | Acc. to EN 61000-6-2 (industrial environment) |
| EMC harmonics | Acc. to EN 61000-3-2/3 |
| EMC interference emission | Acc. to EN 61000-6-3 (household environment) |
| Touch current acc. IEC 60990 (measuring network Fig. 4, TN system) | <= 3.5 mA |
| Motor protection | Thermal overload protector (TOP) wired internally |
| Cable exit | Variable |
| Protection class | I (if protective earth is connected by customer) |
| Product conforming to standard | EN 61800-5-1; CE |
| Approval | C22.2 Nr.77 + CAN/CSA-E60730-1; EAC; UL 1004-7 + 60730 |

Product drawing

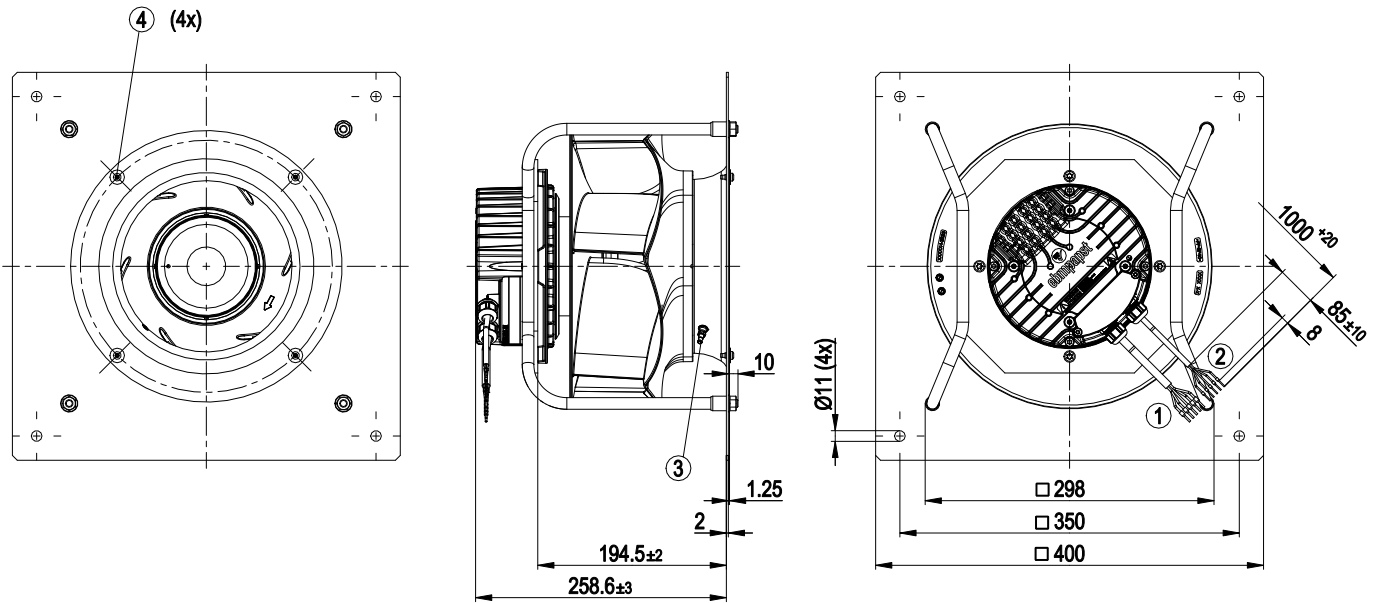


| | |
|---|--|
| 1 | Connection line PVC AWG18, 5x crimped core-end sleeves |
| 2 | Connection line PVC AWG22, 5x crimped core-end sleeves |
| 3 | Inlet nozzle 28004-2-4013 with pressure tap (k-factor: 77) |
| 4 | Mounting for inlet nozzle and FlowGrid |

Connection screen

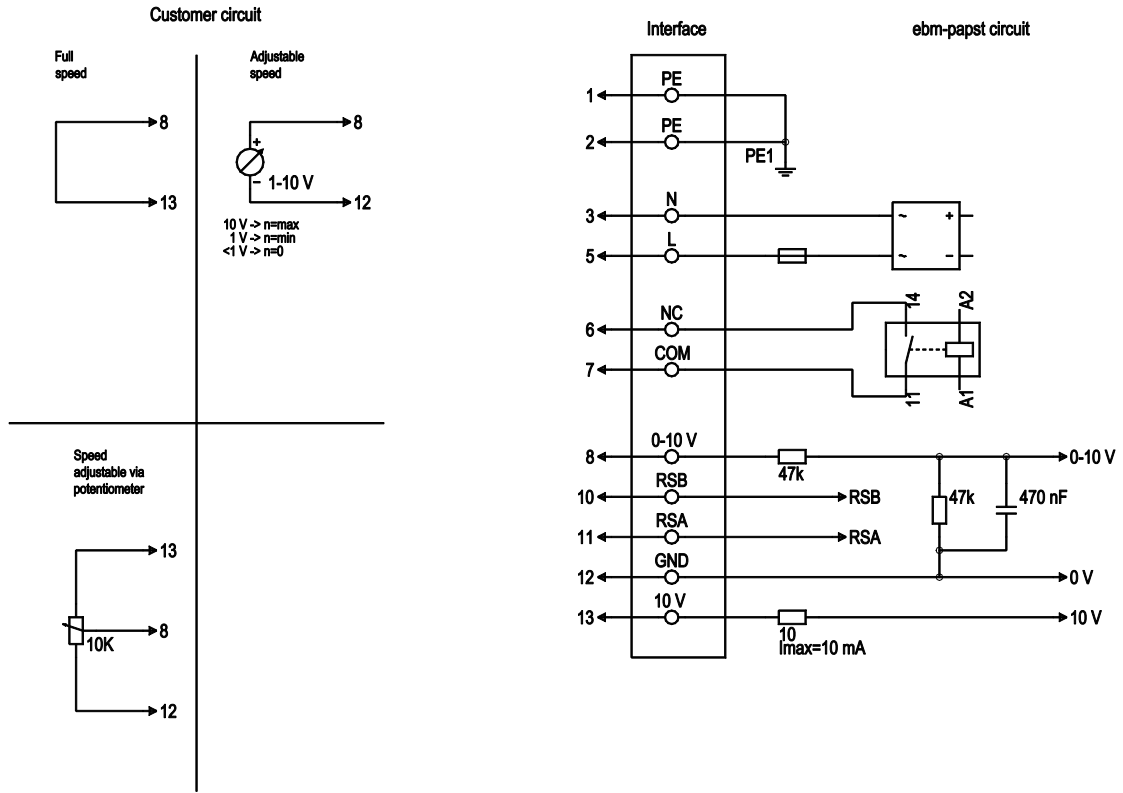

| No. | Conn. | Designation | Colour | Function / assignment |
|-----|-------|-------------|--------------|--|
| 1 | 1, 2 | PE | green/yellow | Protective earth |
| 1 | 3 | N | blue | Supply voltage, neutral conductor, 50/60 Hz |
| 1 | 5 | L | black | Supply voltage, phase, 50/60 Hz |
| 1 | 6 | NC | white 1 | Status relay, floating status contact; break for failure, contact rating 250 VAC / 2A (AC1) min. 10 mA, basic insulation on mains side and reinforced insulation on control interface side |
| 1 | 7 | COM | white 2 | Status relay, floating status contact; common connection, contact rating 250 VAC / 2A (AC1) min. 10 mA, basic insulation on mains side and reinforced insulation on control interface side |
| 2 | 8 | 0-10V | yellow | Analogue input 1 (set value); 0-10 V; Ri=100kΩ; parametrisable curve |
| 2 | 10 | RSB | brown | RS485 interface for Modbus, RSB |
| 2 | 11 | RSA | white | RS485 interface for Modbus, RSA |
| 2 | 12 | GND | blue | Reference ground for control interface, SELV |
| 2 | 13 | +10V | red | Fixed voltage output 10 VDC; +10 V +/-3%; max. 10 mA; short-circuit-proof; power supply for external devices (e.g. potentiometer) |

Charts: Air flow 50 Hz

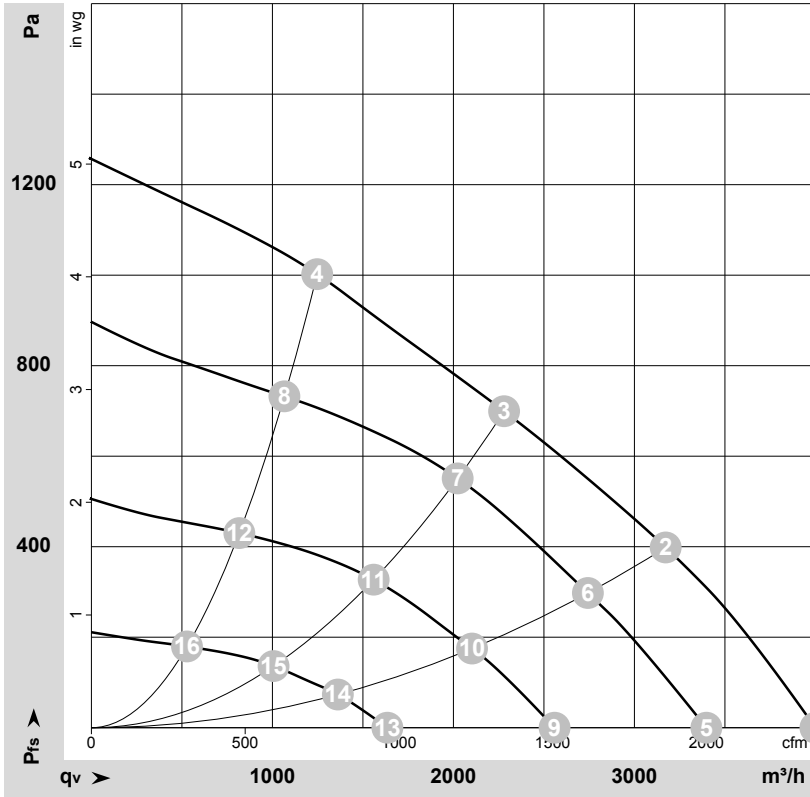

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-173985-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebmpapst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

| | U | f | n | P _{ed} | I | LpA _{in} | LwA _{in} | q _v | P _{fs} | q _v | P _{fs} |
|----|-----|----|-------------------|-----------------|------|-------------------|-------------------|-------------------|-----------------|----------------|--------------------|
| | V | Hz | min ⁻¹ | W | A | dB(A) | dB(A) | m ³ /h | Pa | cfm | inH ₂ O |
| 1 | 230 | 50 | 3260 | 642 | 2.81 | 80 | 87 | 4000 | 0 | 2355 | 0.00 |
| 2 | 230 | 50 | 3115 | 729 | 3.18 | 74 | 82 | 3175 | 400 | 1870 | 1.61 |
| 3 | 230 | 50 | 3000 | 750 | 3.30 | 69 | 77 | 2280 | 700 | 1340 | 2.81 |
| 4 | 230 | 50 | 3180 | 722 | 3.15 | 75 | 82 | 1245 | 1000 | 735 | 4.01 |
| 5 | 230 | 50 | 2780 | 404 | 1.79 | 75 | 83 | 3395 | 0 | 2000 | 0.00 |
| 6 | 230 | 50 | 2695 | 470 | 2.07 | 69 | 77 | 2745 | 298 | 1615 | 1.20 |
| 7 | 230 | 50 | 2660 | 509 | 2.24 | 65 | 73 | 2025 | 552 | 1190 | 2.22 |
| 8 | 230 | 50 | 2710 | 456 | 2.01 | 70 | 77 | 1065 | 732 | 625 | 2.94 |
| 9 | 230 | 50 | 2100 | 186 | 0.85 | 68 | 75 | 2560 | 0 | 1505 | 0.00 |
| 10 | 230 | 50 | 2070 | 227 | 1.02 | 62 | 70 | 2105 | 175 | 1240 | 0.70 |
| 11 | 230 | 50 | 2050 | 243 | 1.09 | 58 | 65 | 1560 | 328 | 920 | 1.32 |
| 12 | 230 | 50 | 2080 | 213 | 0.96 | 61 | 69 | 815 | 430 | 480 | 1.73 |
| 13 | 230 | 50 | 1355 | 63 | 0.37 | 58 | 66 | 1635 | 0 | 960 | 0.00 |
| 14 | 230 | 50 | 1335 | 75 | 0.41 | 53 | 61 | 1360 | 75 | 800 | 0.30 |
| 15 | 230 | 50 | 1330 | 79 | 0.43 | 49 | 56 | 1005 | 136 | 590 | 0.55 |
| 16 | 230 | 50 | 1345 | 71 | 0.40 | 53 | 58 | 530 | 180 | 310 | 0.72 |

U = Supply voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power input · I = Current draw · LpA_{in} = Sound pressure level inlet side · LwA_{in} = Sound power level inlet side · q_v = Air flow
P_{fs} = Pressure increase

