

**ebm-papst Mulfingen GmbH & Co. KG**

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

sales@fansco.com

www.fansco.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

**Nominal data**

|                             |                       |      |      |
|-----------------------------|-----------------------|------|------|
| <b>Type</b>                 | <b>W2S130-AA25-76</b> |      |      |
| <b>Motor</b>                | <b>M2S052-CA</b>      |      |      |
| Phase                       |                       | 1~   | 1~   |
| Nominal voltage             | VAC                   | 115  | 115  |
| Frequency                   | Hz                    | 50   | 60   |
| Method of obtaining data    |                       | fa   | fa   |
| Valid for approval/standard |                       | CE   | CE   |
| Speed (rpm)                 | min <sup>-1</sup>     | 2800 | 3250 |
| Power consumption           | W                     | 41   | 38   |
| Current draw                | A                     | 0.56 | 0.47 |
| Max. back pressure          | Pa                    | 80   | 120  |
| Max. back pressure          | inH <sub>2</sub> O    | 0.32 | 0.48 |
| Min. ambient temperature    | °C                    | -25  | -25  |
| Max. ambient temperature    | °C                    | 50   | 70   |

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
Subject to change




### Technical description

|   |  |
|---|--|
| <b>Weight</b>   | 1.1 kg   |
| <b>Fan size</b>   | 130 mm   |
| <b>Rotor surface</b>  | Painted black  |
| <b>Blade material</b>   | Sheet steel, painted black   |
| <b>Fan housing material</b>   | Die-cast aluminum, painted black   |
| <b>Number of blades</b>   | 7  |
| <b>Airflow direction</b>  | "V"  |
| <b>Direction of rotation</b>  | Counterclockwise, viewed toward rotor  |
| <b>Degree of protection</b>   | IP20   |
| <b>Insulation class</b>   | "B"  |
| <b>Max. permitted ambient temp. for motor (transport/storage)</b>                 | + 80 °C  |
| <b>Min. permitted ambient temp. for motor (transport/storage)</b>                 | - 40 °C  |
| <b>Installation position</b>  | Any  |
| <b>Condensation drainage holes</b>  | None   |
| <b>Mode</b>   | S1   |
| <b>Motor bearing</b>  | Ball bearing   |
| <b>Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)</b> | < 0.75 mA  |
| <b>Motor protection</b>   | Thermal overload protector (TOP) internally connected                              |
| <b>With cable</b>   | Variable   |
| <b>Protection class</b>   | I (if protective earth is connected by customer to the housing's connection point) |
| <b>Conformity with standards</b>  | EN 60335-1; CE   |
| <b>Approval</b>   | CSA C22.2 No. 113; UL 507; VDE   |




## Product drawing

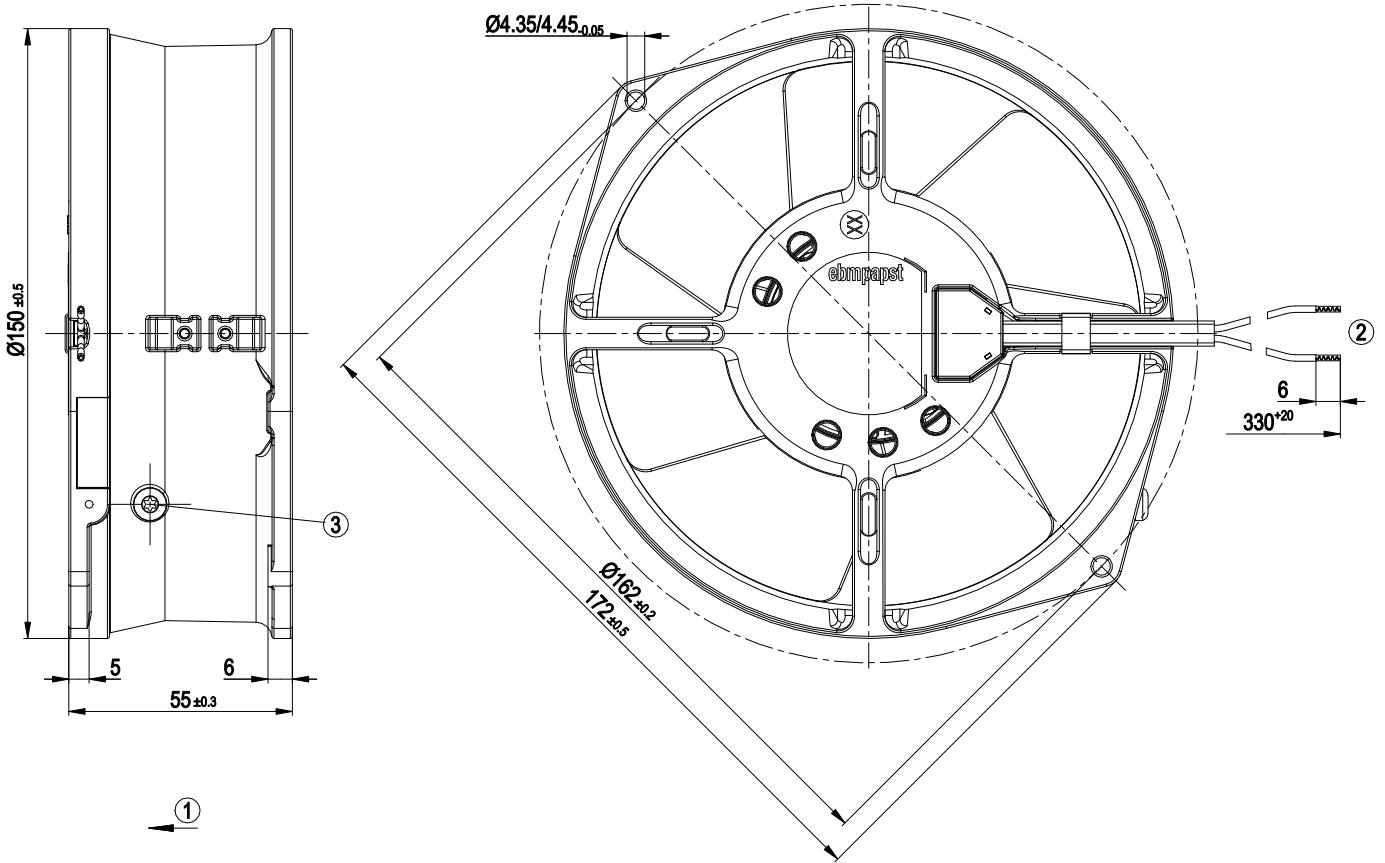

|   |   |
|---|---|
| 1 | Direction of air flow "V"               |
| 2 | Cable PVC AWG20, 2x crimped splices     |
| 3 | M4 screw for fastening ground connector |


## Connection diagram

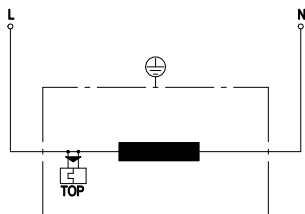

|     |                              |
|-----|------------------------------|
| L   | = black                      |
| N   | = black                      |
| TOP | = thermal overload protector |



## Curves: Air performance 50 Hz

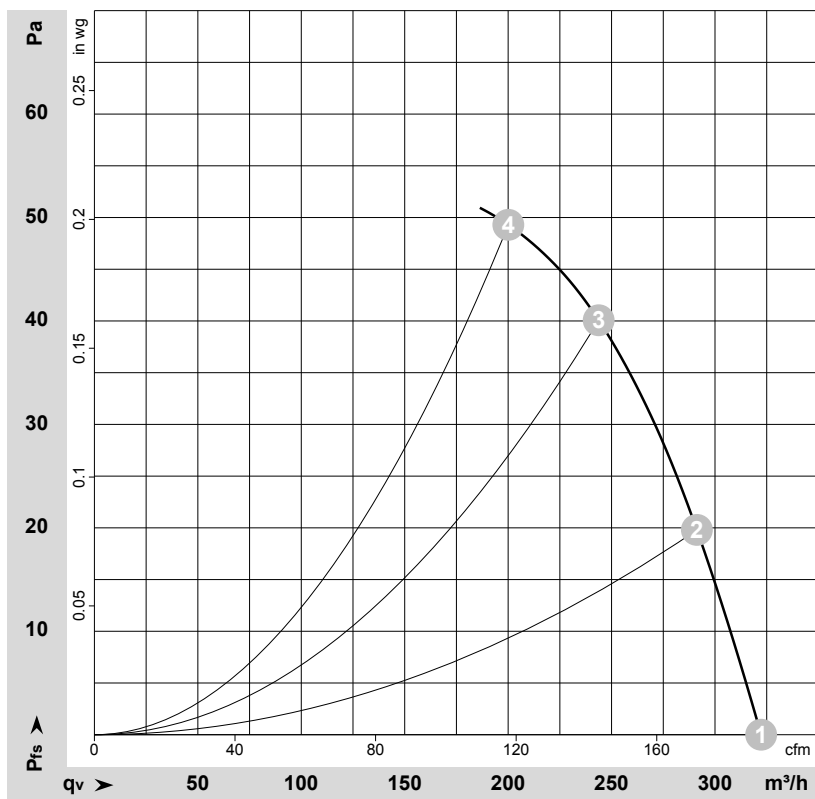

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-58320-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebmpapst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.


## Measured values

|   | U   | f  | n                 | P <sub>e</sub> | I    | q <sub>v</sub>    | p <sub>fs</sub> | q <sub>v</sub> | p <sub>fs</sub>    |
|---|-----|----|-------------------|----------------|------|-------------------|-----------------|----------------|--------------------|
|   | V   | Hz | min <sup>-1</sup> | W              | A    | m <sup>3</sup> /h | Pa              | CFM            | inH <sub>2</sub> O |
| 1 | 115 | 50 | 2800              | 41             | 0.56 | 320               | 0               | 190            | 0.00               |
| 2 | 115 | 50 | 2800              | 42             | 0.56 | 290               | 20              | 170            | 0.08               |
| 3 | 115 | 50 | 2790              | 43             | 0.57 | 245               | 40              | 145            | 0.16               |
| 4 | 115 | 50 | 2790              | 42             | 0.56 | 200               | 50              | 120            | 0.20               |

U = Power supply · f = Frequency · n = Speed (rpm) · P<sub>e</sub> = Power consumption · I = Current draw · q<sub>v</sub> = Air flow · p<sub>fs</sub> = Pressure increase



## Curves: Air performance 60 Hz

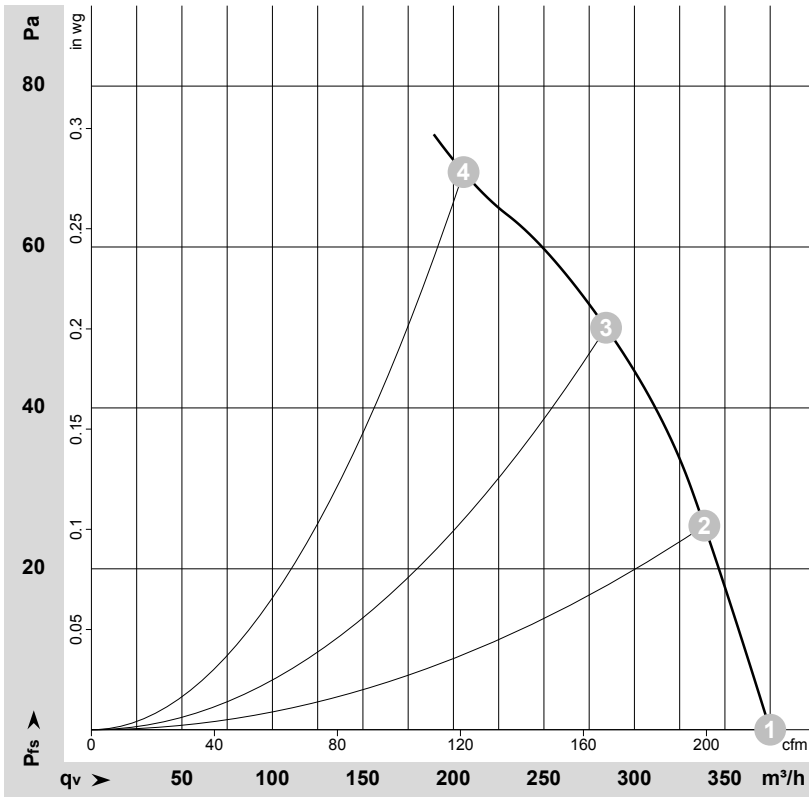

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-58323-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebmpapst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

|   | U   | f  | n                 | $P_e$ | I    | $q_v$             | $p_{fs}$ | $q_v$ | $p_{fs}$           |
|---|-----|----|-------------------|-------|------|-------------------|----------|-------|--------------------|
|   | V   | Hz | min <sup>-1</sup> | W     | A    | m <sup>3</sup> /h | Pa       | CFM   | inH <sub>2</sub> O |
| 1 | 115 | 60 | 3250              | 38    | 0.47 | 375               | 0        | 220   | 0.00               |
| 2 | 115 | 60 | 3210              | 40    | 0.48 | 340               | 25       | 200   | 0.10               |
| 3 | 115 | 60 | 3180              | 41    | 0.48 | 285               | 50       | 165   | 0.20               |
| 4 | 115 | 60 | 3185              | 41    | 0.48 | 205               | 70       | 120   | 0.28               |

U = Power supply · f = Frequency · n = Speed (rpm) ·  $P_e$  = Power consumption · I = Current draw ·  $q_v$  = Air flow ·  $p_{fs}$  = Pressure increase

