

with inlet ring and guard grill

ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

sales@fansco.com

www.fansco.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

| | | |
|--------------------------|-----------------------|------------|
| Type | W3G350-XH05-H1 | |
| Motor | M3G084-DF | |
| Phase | | 1~ |
| Nominal voltage | VAC | 230 |
| Nominal voltage range | VAC | 200 .. 277 |
| Frequency | Hz | 50/60 |
| Method of obtaining data | | ml |
| Speed (rpm) | min ⁻¹ | 2200 |
| Power consumption | W | 500 |
| Current draw | A | 2.2 |
| Max. back pressure | Pa | 350 |
| Max. back pressure | in. wg | 1.41 |
| Min. ambient temperature | °C | -25 |
| Max. ambient temperature | °C | 60 |

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011 (EN 17166)

| | | Actual | Req. 2015 | | | |
|-----------------------------------|---|--------|-----------|-------------------------------|-------------------|------|
| 01 Overall efficiency η_{es} | % | 51.1 | 31.8 | 09 Power consumption P_{ed} | kW | 0.51 |
| 02 Measurement category | | A | | 09 Air flow q_v | m ³ /h | 3175 |
| 03 Efficiency category | | Static | | 09 Pressure increase p_{fs} | Pa | 280 |
| 04 Efficiency grade N | | 59.3 | 40 | 10 Speed (rpm) n | min ⁻¹ | 2235 |
| 05 Variable speed drive | | Yes | | 11 Specific ratio* | | 1.00 |

Data obtained at optimum efficiency level.

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

LU-211766

The efficiency values displayed for achieving conformity with the Ecodesign Regulation EU 327/2011 has been reached with defined air duct components (e.g. inlet rings).
The dimensions must be requested from ebm-papst. If other air conduction geometries are used on the installation side, the ebm-papst evaluation loses its validity/the conformity must be confirmed again.
The product does not fall within the scope of Regulation (EU) 2019/1781 due to the exception specified in Article 2 (2a) (motors completely integrated into a product).



with inlet ring and guard grill


Technical description

| | |
|--|---|
| Size | 350 mm |
| Motor size | 84 |
| Rotor surface | Painted black |
| Terminal box material | PP plastic |
| Electronics housing material | Die-cast aluminum, painted black |
| Impeller material | PP plastic, galvanized sheet-metal plate |
| Inlet ring material | Sheet steel, galvanized and coated with black plastic (RAL 9005) |
| Guard grille material | Steel, coated with black plastic (RAL 9005) |
| Number of blades | 5 |
| Airflow direction | V |
| Direction of rotation | Clockwise, viewed toward rotor |
| Degree of protection | IP55 |
| Insulation class | "F" |
| Moisture (F) / Environmental (H) protection class | H2 |
| Max. permitted ambient temp. for motor (transport/storage) | +80 °C |
| Min. permitted ambient temp. for motor (transport/storage) | -40 °C |
| Installation position | Shaft horizontal or rotor on bottom; rotor on top on request |
| Condensation drainage holes | On rotor side |
| Mode | S1 |
| Motor bearing | Ball bearing |
| Technical features | <ul style="list-style-type: none"> - Output 10 VDC, max. 10 mA - Operation and alarm display - Alarm relay - Integrated PID controller - Power limiter - Motor current limitation - PFC, active - RS-485 MODBUS-RTU - Soft start - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from the mains - Thermal overload protection for electronics/motor - Line undervoltage / phase failure detection |
| EMC immunity to interference | According to EN 61000-6-2 (industrial environment) |
| EMC circuit feedback | According to EN 61000-3-2/3 |
| EMC interference emission | According to EN 61000-6-3 (household environment) |
| Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system) | <= 3.5 mA |
| Electrical hookup | Terminal box |
| Motor protection | Thermal overload protector (TOP) internally connected |
| Protection class | I (with customer connection of protective earth) |
| Conformity with standards | EN 61800-5-1; CE |
| Approval | CSA C22.2 No. 77 + CAN/CSA-E60730-1; EAC; UL 1004-7 + 60730-1 |



with inlet ring and guard grill

Product drawing

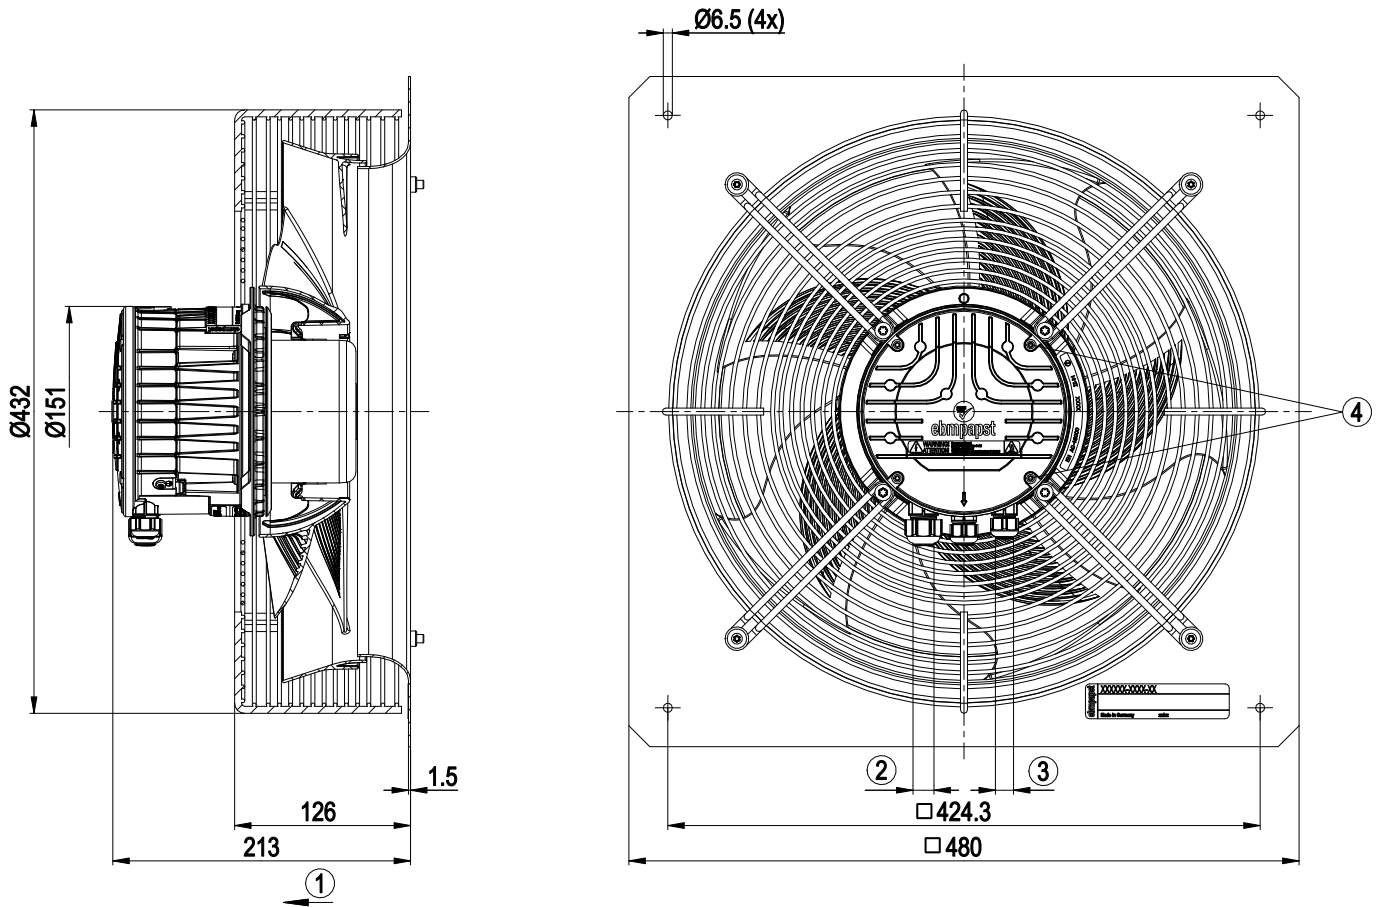


| | |
|---|--|
| 1 | Airflow direction "V" |
| 2 | Cable diameter min. 8 mm, max. 12 mm, tightening torque 1.8 ± 0.3 Nm (use must be made of seal provided) Cable diameter min. 4 mm, max. 10 mm, tightening torque 1.8 ± 0.3 Nm |
| 3 | Cable diameter min. 6 mm, max. 10 mm, tightening torque 1.8 ± 0.3 Nm (use must be made of seal provided) Cable diameter min. 4 mm, max. 7 mm, tightening torque 1.8 ± 0.3 Nm |
| 4 | Tightening torque 1.5 ± 0.2 Nm |



with inlet ring and guard grill

Connection diagram

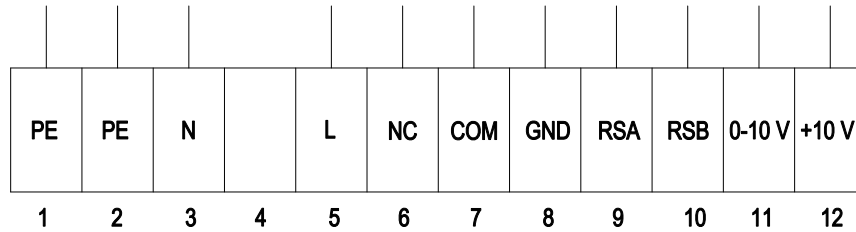


| No. | Conn. | Designation | Function/assignment |
|-----|--------|-------------|--|
| 1 | PE | PE | Protective earth |
| 2 | PE | PE | Protective earth |
| 3 | N | N | Power supply, neutral conductor |
| 4 | - | - | not used |
| 5 | L | L | Power supply, phase |
| 6 | NC | NC | Status relay, floating status contact, break for failure, contact rating 250 VAC / 2 A (AC1) / min. 10 mA; basic insulation on supply side and reinforced insulation on control interface side |
| 7 | COM | COM | Status relay, floating status contact, common connection, contact rating 250 VAC / 2 A (AC1) / min. 10 mA; basic insulation on supply side and reinforced insulation on control interface side |
| 8 | GND | GND | Reference ground for control interface, SELV |
| 9 | RSA | RSA | RS485 interface for MODBUS, RSA; SELV |
| 10 | RSB | RSB | RS485 interface for MODBUS, RSB; SELV |
| 11 | 0-10 V | 0-10 V | Analog input (set value) SELV, 0-10 V, Ri = 100 kΩ, adjustable curve |
| 12 | +10 V | +10 V | Fixed voltage output 10 VDC, SELV, +10 V ±3%, max. 10 mA, short-circuit-proof, power supply for external devices (e.g. pot) |



with inlet ring and guard grill

Curves: Air performance 50 Hz

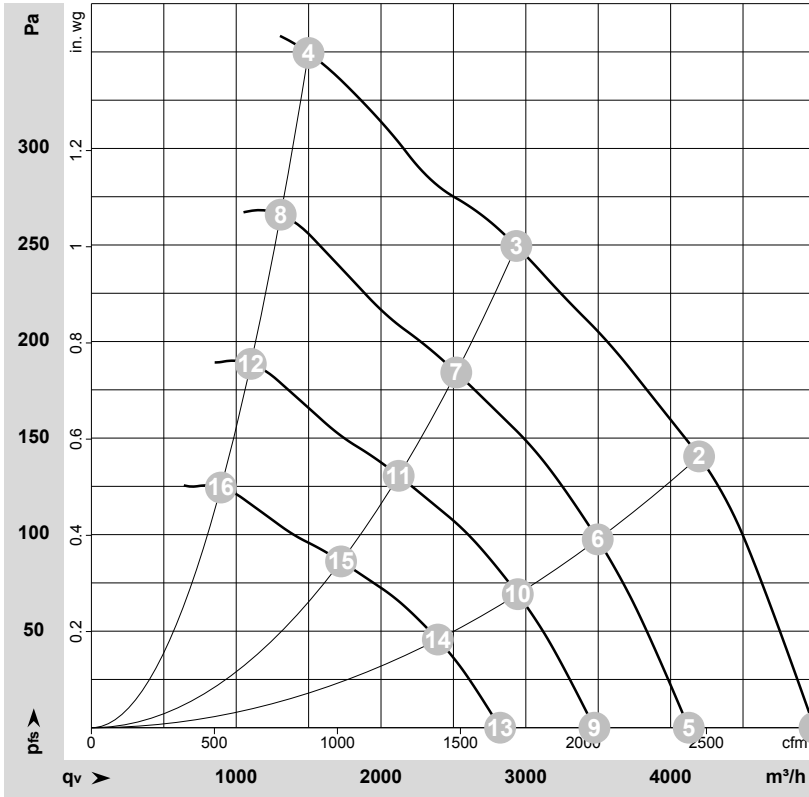

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-212334-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebmpapst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

| | Wired | U | f | n | P _{ed} | I | LpA _{in} | LwA _{in} | q _v | P _{fs} | q _v | P _{fs} |
|----|-------|-----|----|-------------------|-----------------|------|-------------------|-------------------|-------------------|-----------------|----------------|-----------------|
| | | V | Hz | min ⁻¹ | W | A | dB(A) | dB(A) | m ³ /h | Pa | cfm | in. wg |
| 1 | 1~ | 230 | 50 | 2300 | 435 | 1.91 | 73 | 79 | 4995 | 0 | 2940 | 0.00 |
| 2 | 1~ | 230 | 50 | 2280 | 500 | 2.20 | 69 | 75 | 4195 | 140 | 2470 | 0.56 |
| 3 | 1~ | 230 | 50 | 2215 | 500 | 2.20 | 69 | 75 | 2935 | 250 | 1725 | 1.00 |
| 4 | 1~ | 230 | 50 | 2200 | 500 | 2.20 | 74 | 81 | 1500 | 350 | 880 | 1.41 |
| 5 | 1~ | 230 | 50 | 1900 | 245 | 1.08 | 68 | 75 | 4125 | 0 | 2430 | 0.00 |
| 6 | 1~ | 230 | 50 | 1900 | 292 | 1.28 | 64 | 71 | 3495 | 98 | 2060 | 0.39 |
| 7 | 1~ | 230 | 50 | 1900 | 322 | 1.41 | 65 | 71 | 2520 | 184 | 1485 | 0.74 |
| 8 | 1~ | 230 | 50 | 1900 | 337 | 1.47 | 71 | 77 | 1305 | 271 | 770 | 1.09 |
| 9 | 1~ | 230 | 50 | 1600 | 147 | 0.64 | 64 | 70 | 3475 | 0 | 2045 | 0.00 |
| 10 | 1~ | 230 | 50 | 1600 | 174 | 0.76 | 60 | 66 | 2945 | 69 | 1735 | 0.28 |
| 11 | 1~ | 230 | 50 | 1600 | 192 | 0.84 | 60 | 67 | 2120 | 131 | 1250 | 0.53 |
| 12 | 1~ | 230 | 50 | 1600 | 201 | 0.88 | 66 | 73 | 1100 | 192 | 650 | 0.77 |
| 13 | 1~ | 230 | 50 | 1300 | 79 | 0.34 | 59 | 65 | 2825 | 0 | 1660 | 0.00 |
| 14 | 1~ | 230 | 50 | 1300 | 93 | 0.41 | 55 | 61 | 2395 | 46 | 1410 | 0.18 |
| 15 | 1~ | 230 | 50 | 1300 | 103 | 0.45 | 55 | 62 | 1725 | 86 | 1015 | 0.35 |
| 16 | 1~ | 230 | 50 | 1300 | 108 | 0.47 | 61 | 68 | 895 | 127 | 525 | 0.51 |

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
 q_v = Air flow · P_{fs} = Pressure increase

